


COIL: @ 25°C
 RESISTANCE 675 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.47 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 5 MS MAX
RELEASE 5 MS MAX
BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

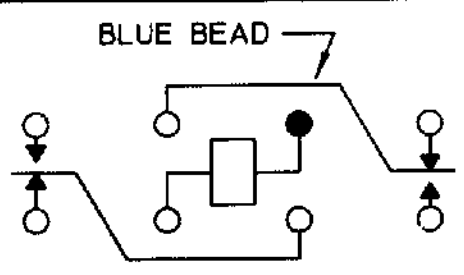

CONTACT RATING: LOW LEVEL TO 5A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/8/94 CK. *W8/24 JMB*



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE FW5A RELAY

FW5A1201G00