


REV. 0
DCO 170339

| | |
|-----------------|----------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 5000 OHMS ± 10% |
| NOMINAL VOLTAGE | 6.0 mADC |
| MUST OPERATE | 2.8 mADC |
| MUST RELEASE | 1.4 mADC MAX, 0.3 mADC MIN |

| | |
|--------------|-----------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 CPS TO 2000 CPS @ 15 g's |
| SHOCK | 100 g's 6 MS DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

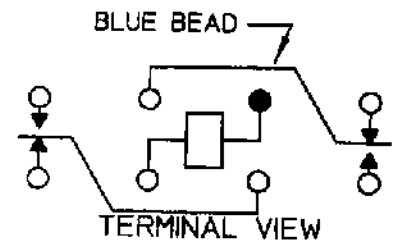

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00 CK. TLG 12-6-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-090 REV. 3SAT RELAY

3SAT1307A2