


COIL: @ 25°C
 RESISTANCE 2500 OHMS ± 10%
 NOMINAL VOLTAGE 20.0 VDC
 MUST OPERATE 4.0 mADC
 MUST RELEASE 2.0 mADC MAX, 0.40 mADC MIN.

ENVIRONMENT:
 ② VIBRATION 10 Hz TO 2000 Hz @ 20 g's
 SHOCK 90 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: ② GENICOM IS 3000 Hz
 OPERATE 15 MS MAX ③ (GENICOM IS 10 MS MAX)
 RELEASE 10 MS MAX ④ (GENICOM IS 5 MS MAX)
 BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

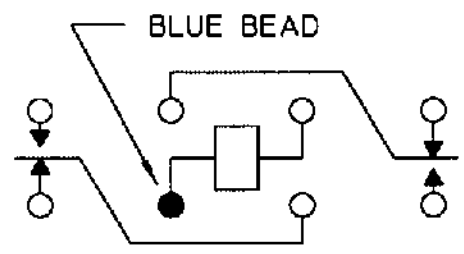

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/1/97 CK 5/10/97

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. GENICOM
 CUST. NO. 3SAT6004R1

TYPE 'SF' RELAY

SF5201J06