


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
A		ECO-06-23628	250CT2006	MB	MW		

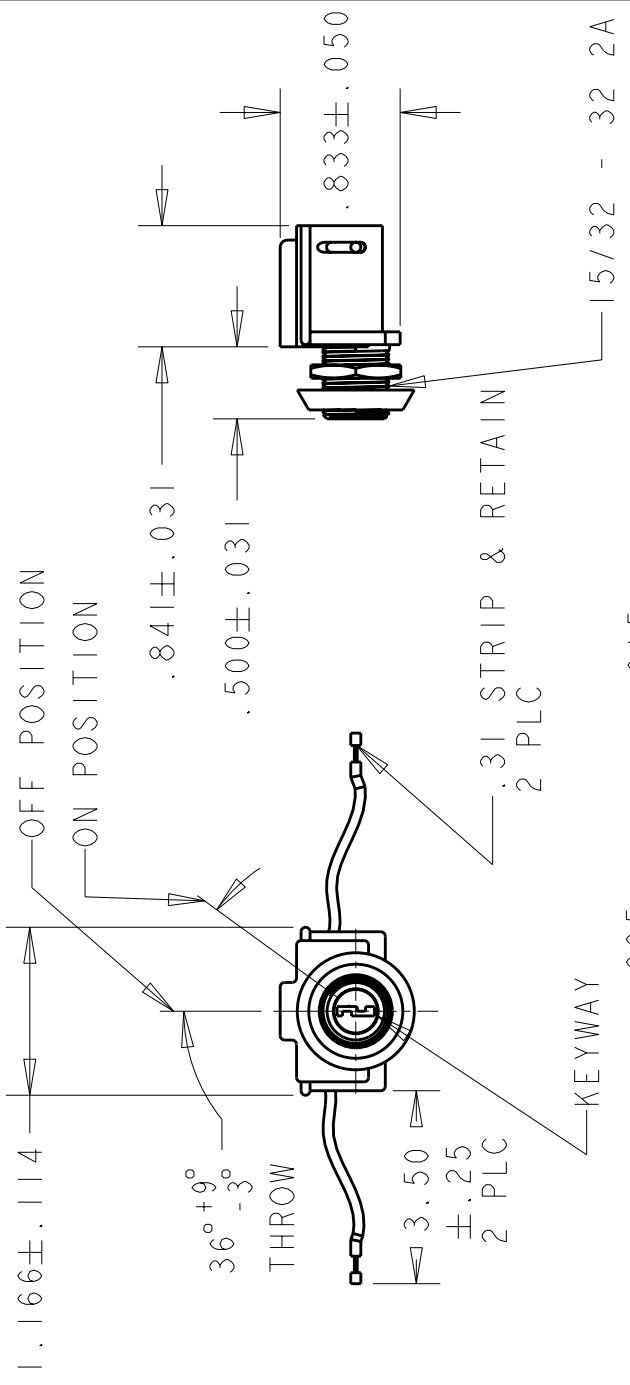

NOTES:
 .062⁺.005₋ W X .030⁺.015₋ D

- KEY REMOVABLE IN OFF POSITION ONLY.
- KEYSWITCH SUPPLIED WITH 1 HEX NUT, 1 DRESS NUT AND 1 KEY.
- WIRE: 18 AWG BOND WIRE, TINNED, PVC INSULATED, W/ 80°C AND 300 V RATING (UL 1007).
 CONTACT MATERIAL: MOVABLE-BRONZE, SILVER PLATED;
 STATIONARY-BRASS, SILVER PLATED.
 CIRCUIT: SPST
 ACTION: OFF-ON
- ELECTRICAL SPECIFICATIONS:
 KEYSWITCH RATING: 6A, 125V AC; 3A, 250V AC
 DIELECTRIC VOLTAGE: 1000V RMS MIN.
 INSULATION RESISTANCE: 100 MΩ MIN.
 CONTACT RESISTANCE: 100 mΩ MAX.
 CYCLE LIFE: 6000 OPERATIONS MIN.
 TEMPERATURE RISE: <30°C AT 6000 OPERATIONS
- ENVIRONMENTAL SPECIFICATIONS:
 OPERATING TEMP: -18°C TO 65°C

THIS DRAWING IS UNPUBLISHED.
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

DIMENSIONS: INCHES		DWN	12NOV2003	MATERIAL	FINISH	PART NUMBER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J.C. YOSLER	07NOV2006			1571487-1	
0 PLC ± .03		CHK	07NOV2006				
1 PLC ± .015		M. WILBOURN	07NOV2006				
2 PLC ± .010		APVD					
3 PLC ± .010		M. WILBOURN					
4 PLC ±		PRODUCT SPEC					
ANGLES ±1/2							
		CUSTOMER DRAWING		SCALE 3:4		SHEET 1 OF 1	
		WEIGHT -		CAGE CODE DRAWING NO		RESTRICTED TO	
		-		A4 00779 C=1571487		-	
		-		NAME		REV A	
		-		KEYSWITCH, SPST			
		-		Tyco Electronics			
		-		Harrisburg, PA 17105-3608			