


REV. 2
DCO 62982

COIL: @ 25°C	
SET	RESET
1150 OHMS ±10%	1150 OHMS ±10%
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE
13.5 VDC MUST OPERATE	13.5 VDC MUST OPERATE
ENVIRONMENT:	
VIBRATION	10 Hz 2000 Hz 30 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 5 MS MAX. CONTACT BOUNCE 2 MS MAX.	

CUSTOMER DATA SHEET

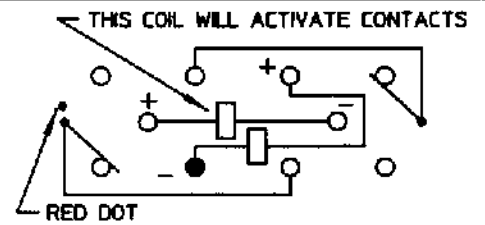

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/9/98

CK. 9/30/98



CUST. C. I. I. STD.
CUST. NO.

TYPE "LF" RELAY

LF2149K00