DRAWING MADE IN AMERICAN PROJECTION

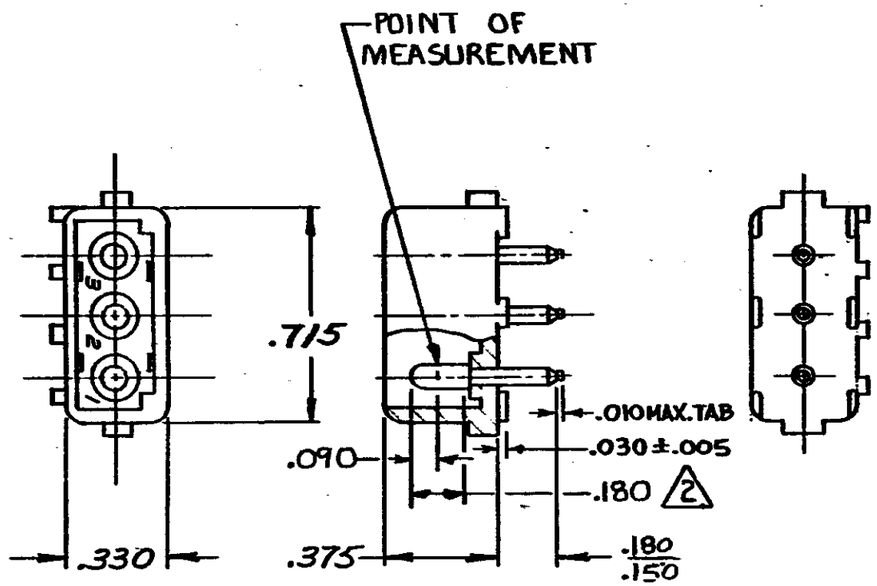

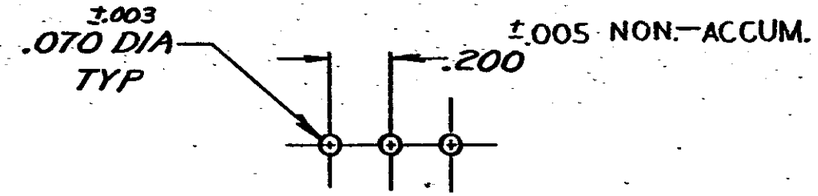

RECOMMENDED LAYOUT FOR .062 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY SPEC. NO. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.

ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH
350210-2	NYLON NATURAL	COPPER ALLOY - GOLD (2)
350210-1	NYLON - NATURAL	COPPER ALLOY - PRE-TIN

CUSTOMER COPY REFERENCE ONLY

LTR	REVISION RECORD	DR	CHK	DATE
T2	REVISED PER ECR-13-008342	AV	RP	12NOV 2013
T1	REVISED PER ECO-11-005294	RK	HMR	07APR 11

REQUIRED PER ASSEMBLY

DESCRIPTION

NUMBER 350210

DR 9. Edenas 4-12-73

CHK Em Pol Hownwage 4/12/73

DE J. Nuckles 4-13-73

APP J. Nuckles 4-13-73

MATERIAL AND FINISH: SEE TABLE

WIRE — RANGE — INSULATION: —

TOLERANCE EXCEPT AS NOTED ±.015 ± 1° 0'

SCALE —

TE Connectivity

CLASS .084 DIA. PIN

TYPE PIN HEADER

LOC CM | B | NO 350210 | REV T2

NAME 3 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

PRINT DIST 53

DIMENSIONS IN INCHES, DO NOT SCALE PRINT.

WAS P-72-6198

US

S

Unpublished copyright not to be reproduced nor published without written permission of AMP Incorporated