
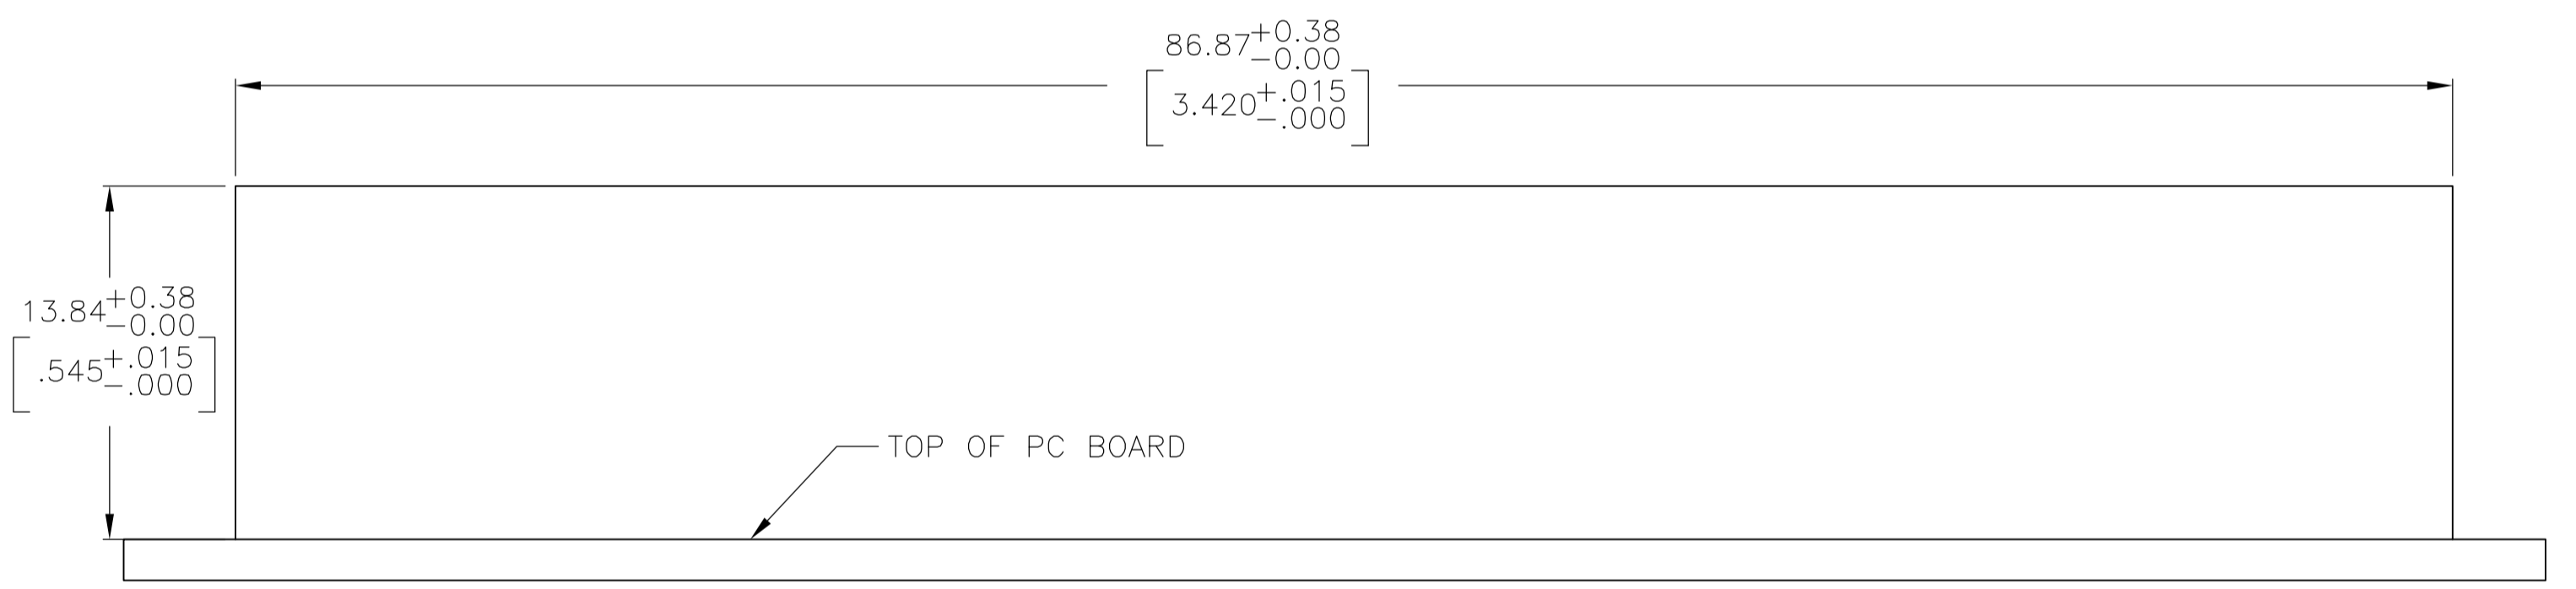
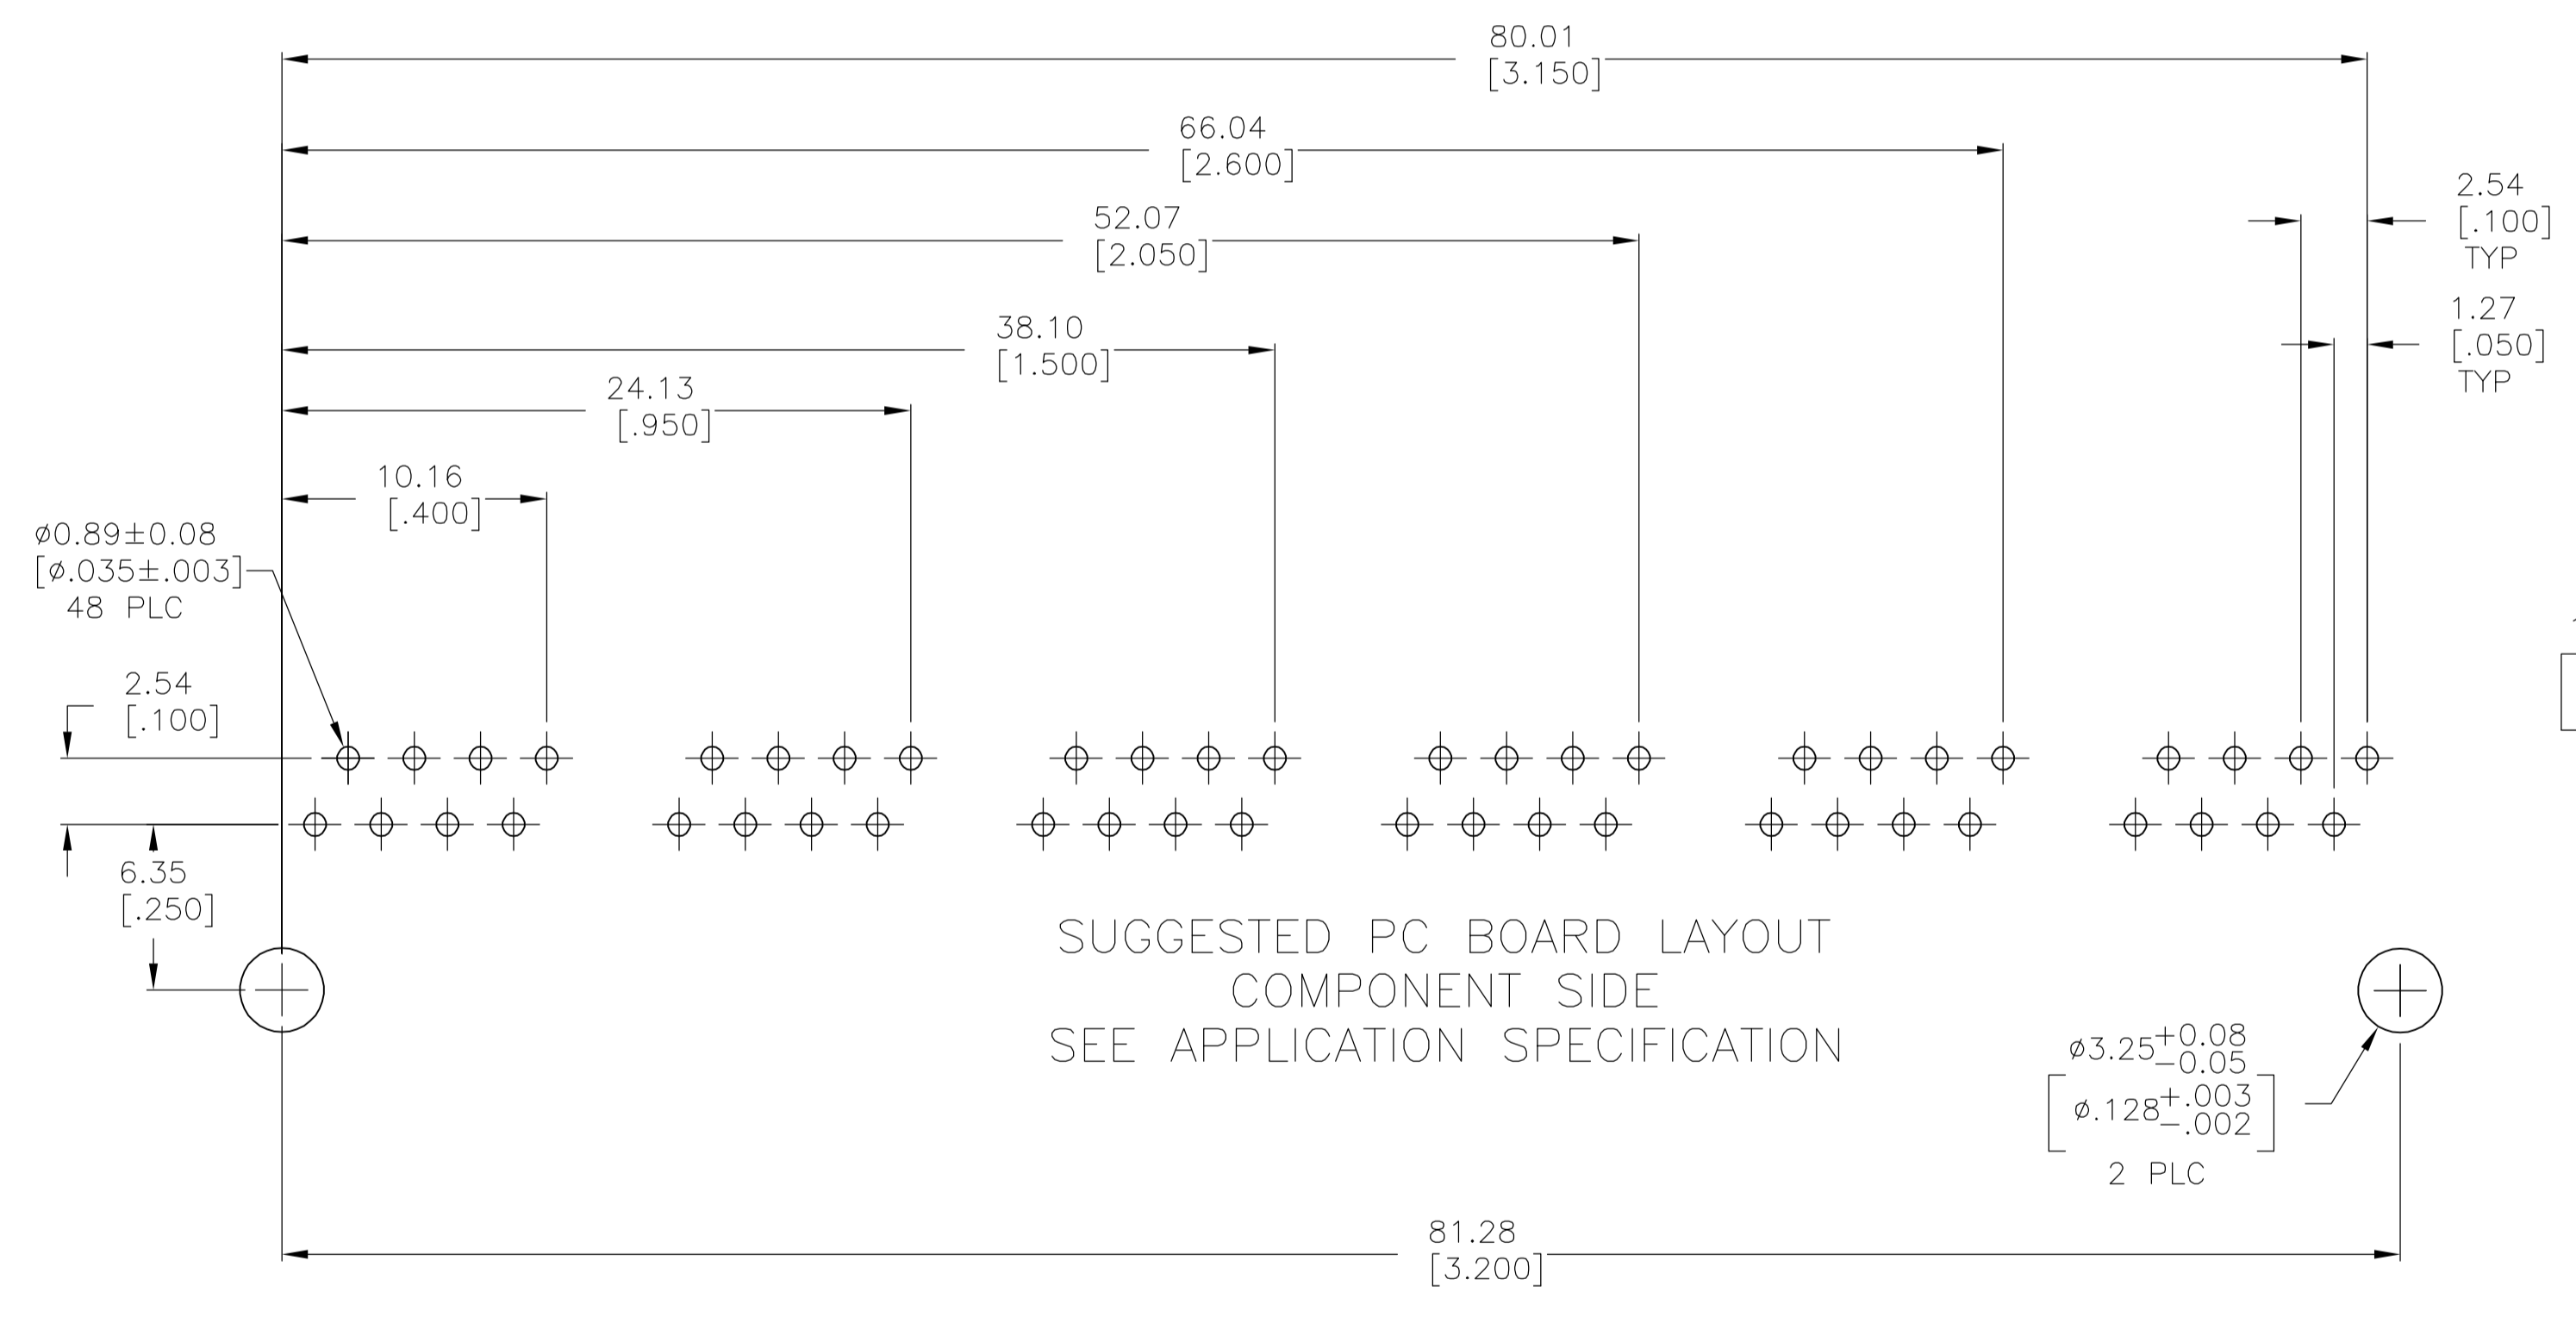


- MATERIAL: HOUSING—HIGH TEMPERATURE NYLON, BLACK, IR COMPATIBLE, UL 94V-0.
 TERMINALS - 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27μm [.000050] MINIMUM HARD GOLD IN LOCALIZED AREA AND 3.81μm [.000150] MINIMUM MATTE TIN IN SOLDER AREA OVER 1.27μm [.000050] MINIMUM NICKEL UNDERPLATE

△ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

△ CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF THE TRADITIONAL JACKS.

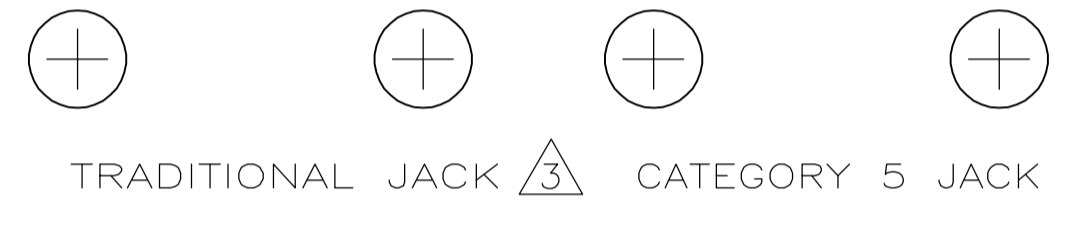

5558501-1
 PART NO.

| | | | | | |
|--|--|---------------------------------------|--|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN W. LONG/L.A.MAYER 03NOV2006 | | Tyco Electronics Corporation Harrisburg, PA 17105-3608 | |
| DIMENSIONS: mm [INCHES] | | CHK J. WESTMAN 03NOV2006 | | APVD S. FLICKINGER 03NOV2006 | NAME MODULAR JACK ASSEMBLY, 6 PORT, 8 POSITION, RIGHT ANGLE, CATEGORY 5 |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | PRODUCT SPEC | | SIZE | |
| 0 PLC ± - | | 108-1392 | | CASE CODE | |
| 1 PLC ± - | | APPLICATION SPEC | | DRAWING NO | |
| 2 PLC ± 0.25 [.010] | | 114-2048 | | RESTRICTED TO | |
| 3 PLC ± - | | WEIGHT | | A1 00779 | |
| 4 PLC ± - | | CUSTOMER DRAWING | | SCALE 4:1 | |
| ANGLES ± - | | FINISH | | SHEET 1 OF 1 | |
| SEE NOTE 1 | | SEE NOTE 1 | | REV B | |