



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AR	39	J1	REVISED PER ECO-11-004835	11MAR11	RK HMR

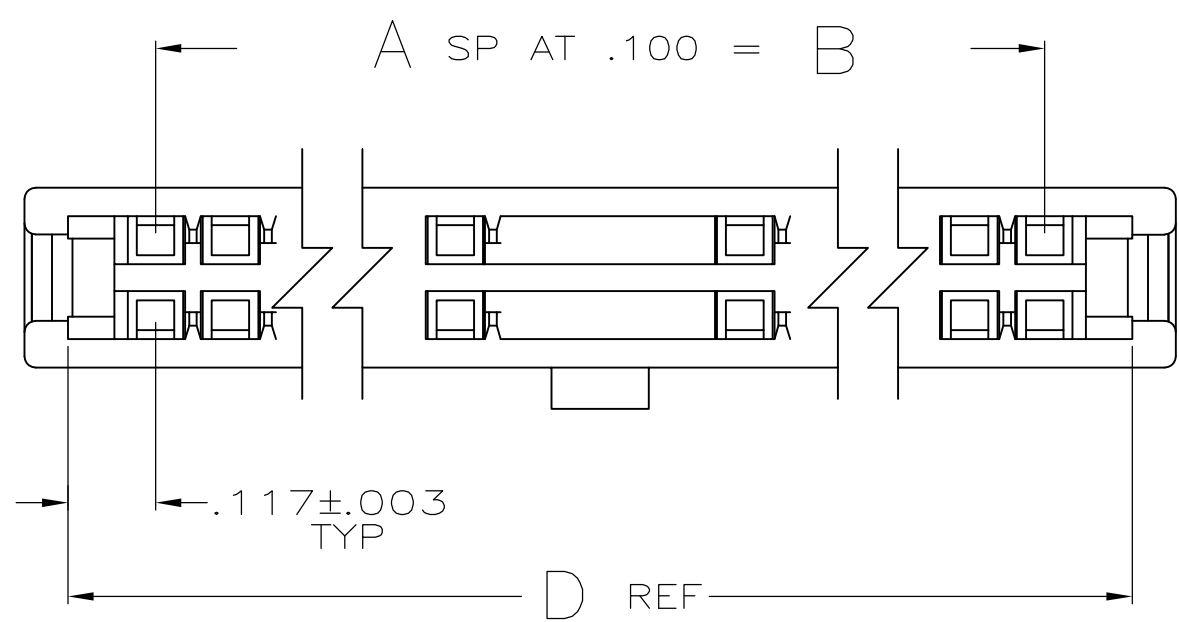

- 1 HOUSING WILL ACCOMMODATE FLEXIBLE FLAT CABLE ON .100 CENTERS AND/OR #22-32 AWG WIRE WITH INSULATION RANGE OF .025 TO .056
- 2 HOUSING WILL INTERFACE WITH MOD II LOW PROFILE SHROUDED HEADERS AND AMPLATCH UNIVERSAL EJECTION STYLE PIN HEADER ASSEMBLIES WITH LATCH DIMENSIONS OF A=.576
- 3 BRIGHT TIN-LEAD PLATED CONTACTS ARE NOT RECOMMENDED FOR USE IN THIS HOUSING OVER 40 POSITIONS

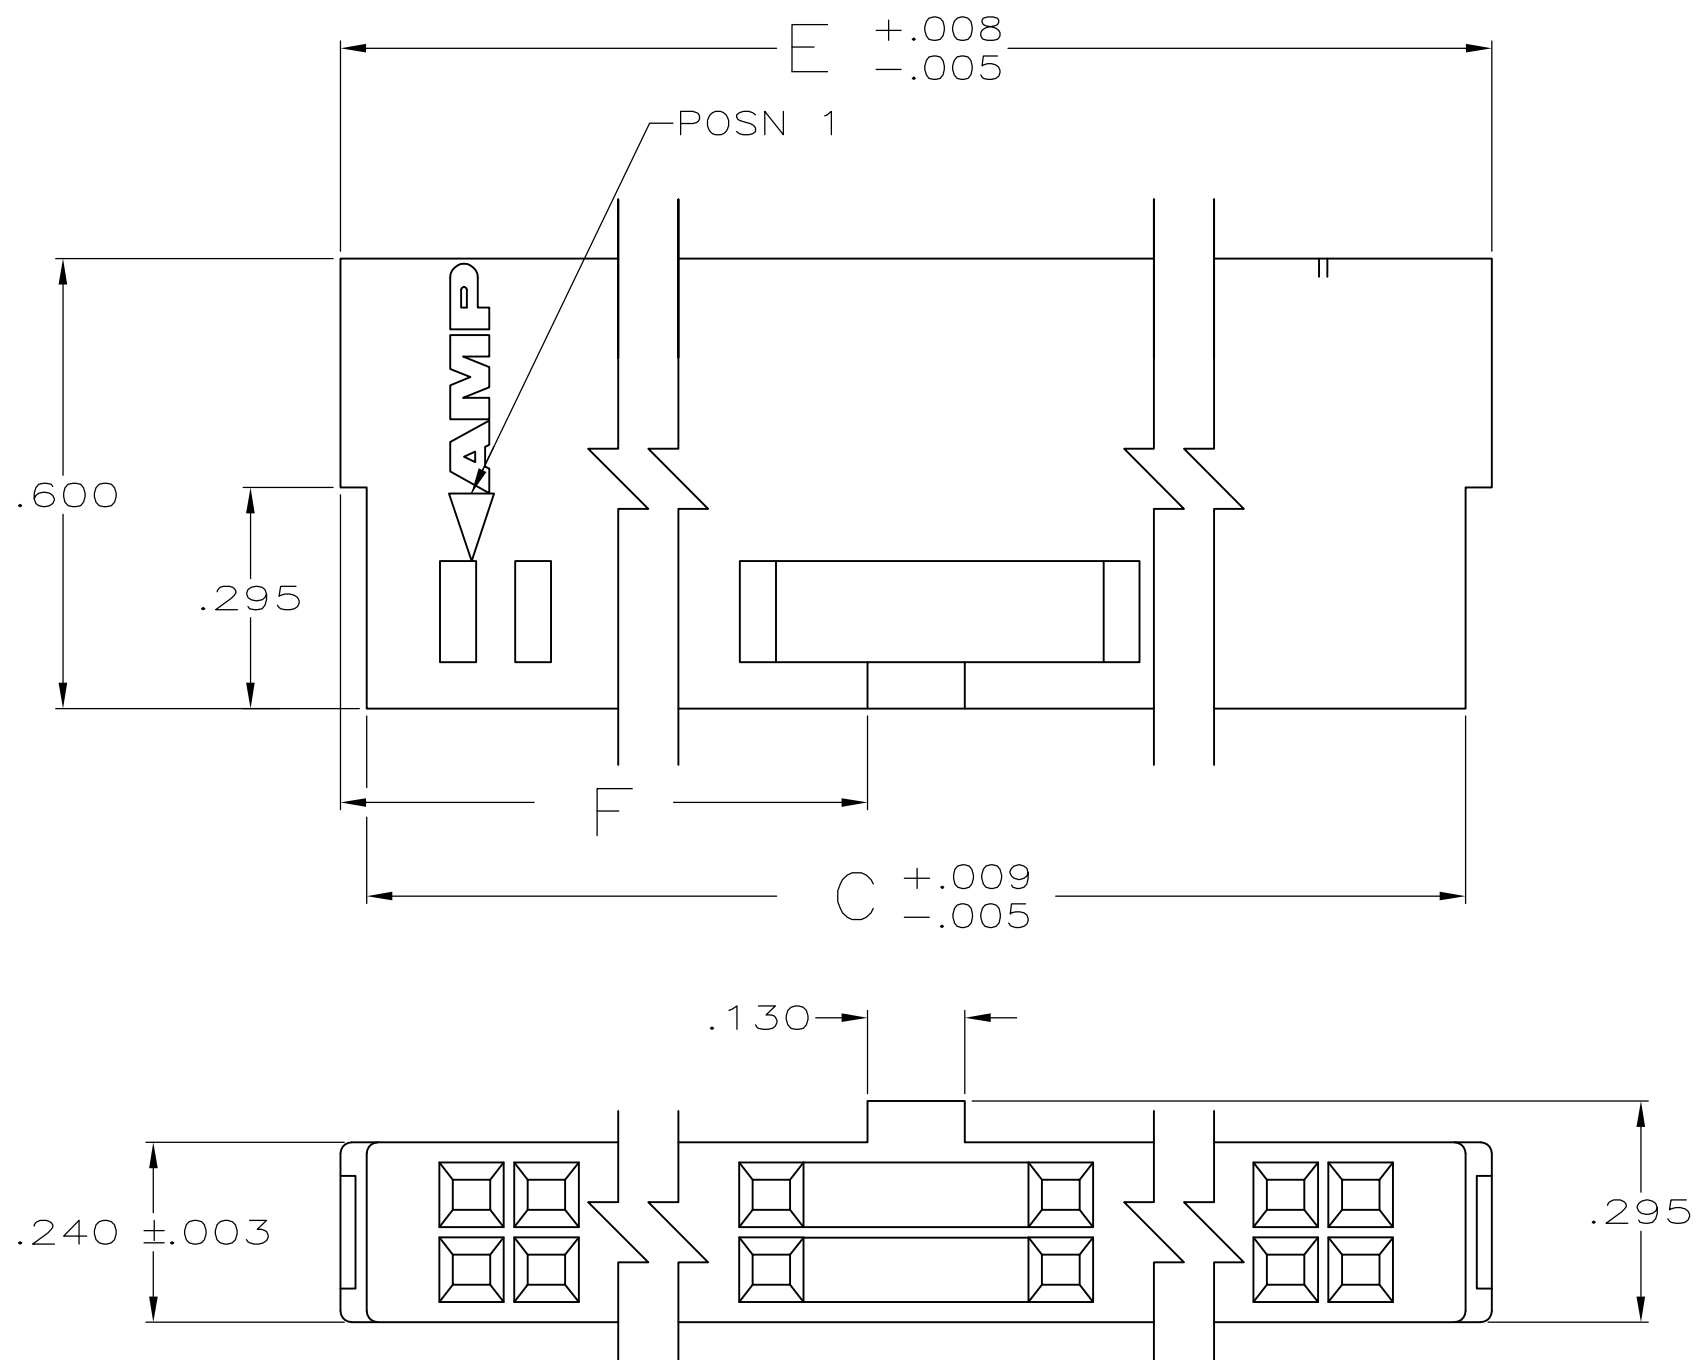

OBSOLETE	1.660	3.450	3.334	3.380	3.100	31	64	1-487223-6
	1.560	3.250	3.134	3.180	2.900	29	60	1-487223-5
OBSOLETE	1.460	3.050	2.934	2.980	2.700	27	56	1-487223-4
OBSOLETE	1.410	2.950	2.834	2.880	2.600	26	54	1-487223-3
	1.310	2.750	2.634	2.680	2.400	24	50	1-487223-2
OBSOLETE	1.160	2.450	2.334	2.380	2.100	21	44	1-487223-1
	1.060	2.250	2.134	2.180	1.900	19	40	1-487223-0
	.910	1.950	1.834	1.880	1.600	16	34	487223-9
	.810	1.750	1.634	1.680	1.400	14	30	487223-8
	.710	1.550	1.434	1.480	1.200	12	26	487223-7
	.660	1.450	1.334	1.380	1.100	11	24	487223-6
	.560	1.250	1.134	1.180	.900	9	20	487223-5
OBSOLETE	.510	1.150	1.034	1.080	.800	8	18	487223-4
	.460	1.050	.934	.980	.700	7	16	487223-3
	.410	.950	.834	.880	.600	6	14	487223-2
	.310	.750	.634	.680	.400	4	10	487223-1
	F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H MOLL 8-4-88  
 CHK G D MILLER 8-4-88  
 APVD G D MILLER 8-4-88

**STE** TE Connectivity

NAME HOUSING, RECEPTACLE, FFC .100X.100 CENTERLINE, DOUBLE ROW

DIMENSIONS: INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ± -  
 1 PLC ± -  
 2 PLC ± -  
 3 PLC ± .005  
 4 PLC ± -  
 ANGLES ± -  
 FINISH -

MATERIAL FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK

PRODUCT SPEC -  
 APPLICATION SPEC -  
 WEIGHT -

SIZE A2 CAGE CODE 00779 DRAWING NO C=487223 RESTRICTED TO -

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV J1