



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50					REV AND REDRAWN PER AF-7225	2/4/91	PF/JR

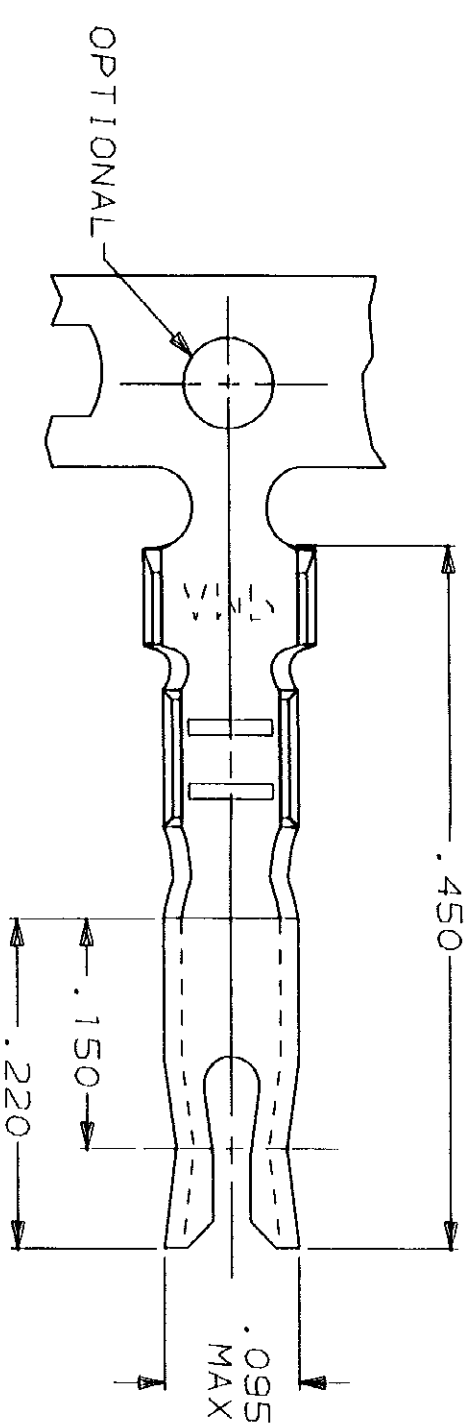

- 1 CONTINUOUS STRIP ON REELS.
- 2 .000030 MIN GOLD PER MIL-G-45204 IN LOCALIZED GOLD PL AREA, GOLD FLASH ON REMAINDER OVER .000050 MIN NICKEL PER QQ-N-290.
- 3 .000080 MIN TIN PL PER MIL-T-10727.

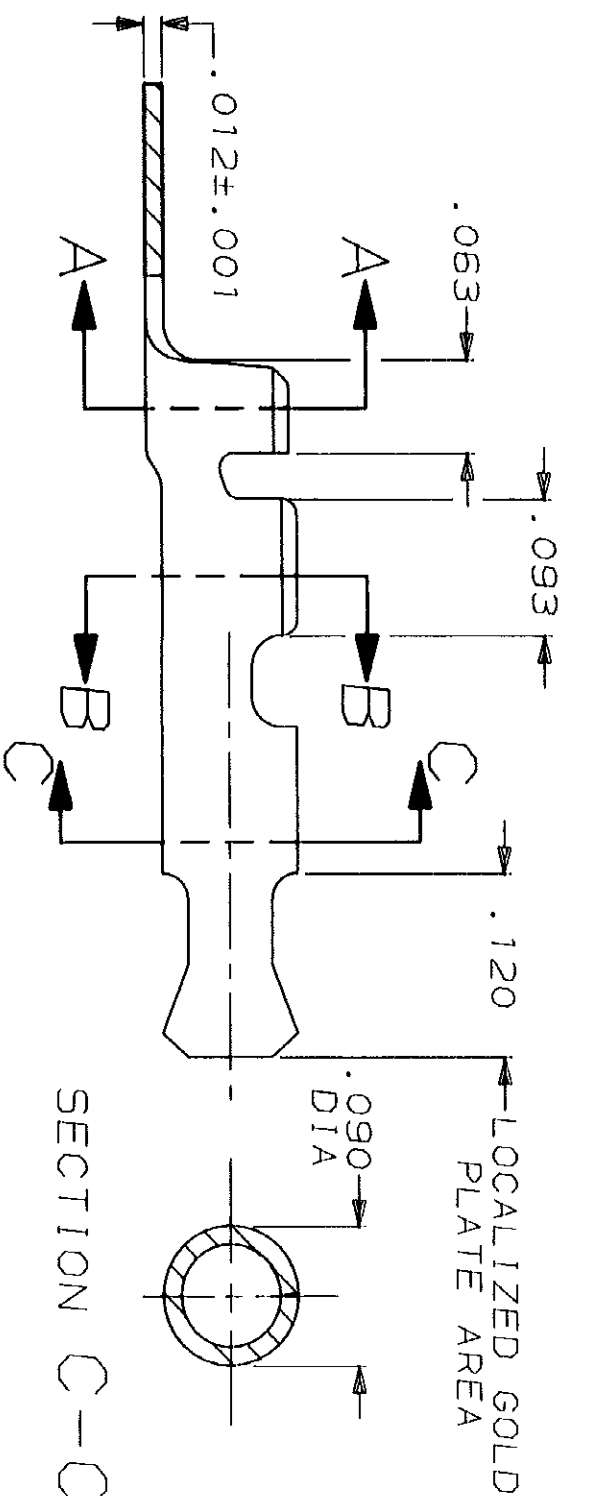

SECTION C-C

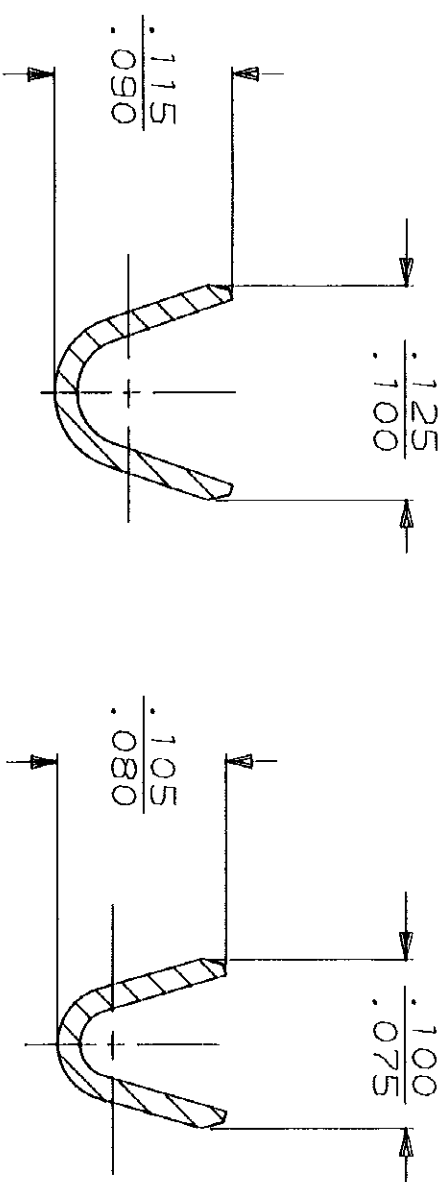

SECTION A-A
SCALE 10:1

SECTION B-B
SCALE 10:1

3 2		.048-.071 DIA		24-20 AWG		60885-2 60885-1	
FINISH		INSULATION RANGE		WIRE RANGE		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLG DEC ± .015 3 PLG DEC ± .015 ANGLES		DR 2/4/91 P FORNEY CHK JR RUTH APPD 2/4/91 G YEETER APPD 2/4/91 R WEAVILL PRODUCT SPEC		NAME AMP AMP Incorporated Harrisburg, PA 17105-3608			
MATERIAL #4 HARD PHOS BRONZE				RECEPTACLE, PIN, .055 DIA			
FINISH SEE TABLE		APPLICATION SPEC		SIZE B		CAGE CODE 00779	
		WEIGHT		SCALE 8:1		DRAWING NO 60885	
						SHEET 1 OF 1	