


REV
A
HDP26-18-6S *

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P17330	8/2/01	R.D.R.
A	REVISED PER E.O. P20700	11-9-10	RDR

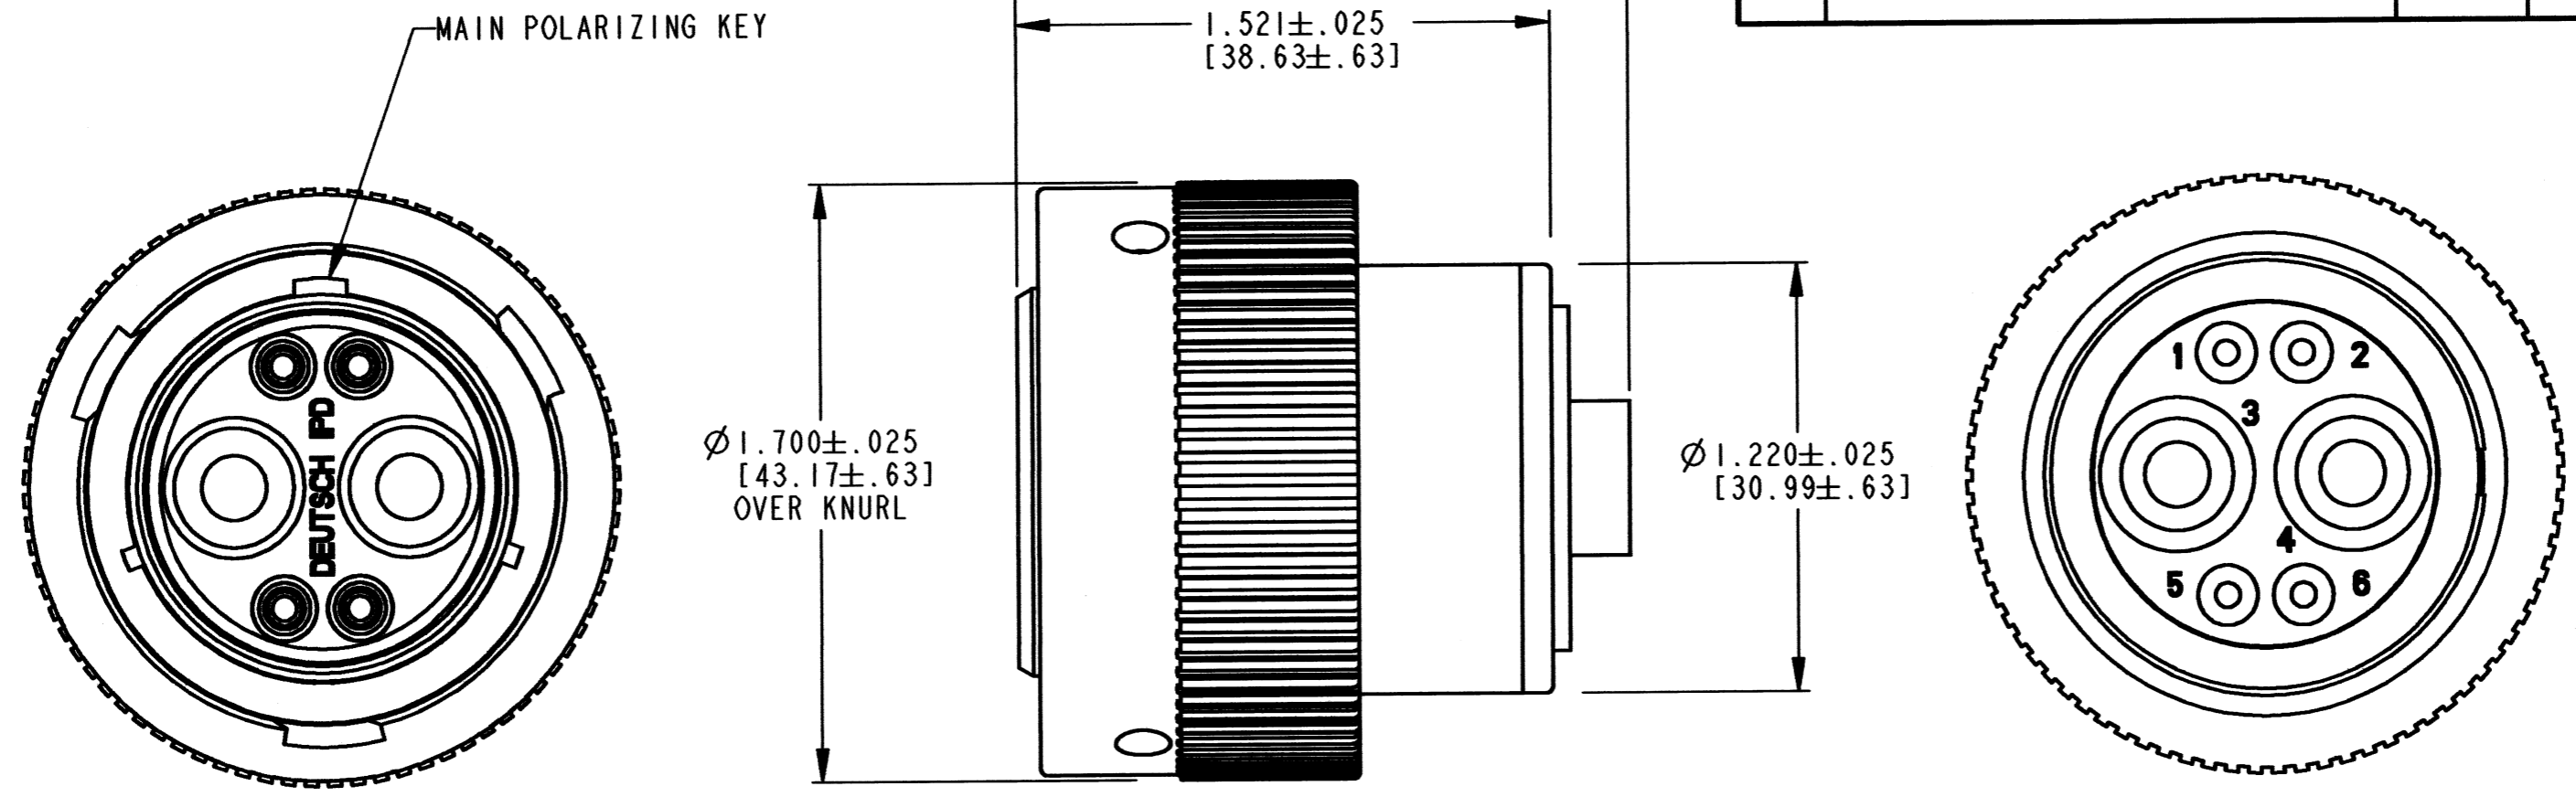

1. CONSULT FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.
2. THIS CONNECTOR WILL ACCOMODATE THE FOLLOWING WIRE INSULATION DIAMETERS.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. DIMENSION TOLERANCES ARE $\pm .025$ [$\pm .63$] UNLESS NOTED OTHERWISE.


SEAL TYPE	CONTACT SIZE	MIN INSULATION O.D.	MAX INSULATION O.D.	WIRE GAUGE AWG [mm ²] RANGE
N	16	.100 [2.54]	.134 [3.40]	14-20 [2.0 - 0.5mm ²]
E	16	.053 [1.35]	.120 [3.05]	14-20 [2.0 - 0.5mm ²]
N or E	4	.261 [6.63]	.292 [7.42]	6 [13mm ²]

NOTES:

7. WHEN * = N: NORMAL SEAL
WHEN * = E: REDUCED DIAMETER E SEAL.

6. THIS PART MATES WITH HDP24-18-6P*-****.
****= ALL MODIFICATIONS, *= TYPE OF SEAL.

5. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DWG. 0425-015-0000 and 0425-021-0000.

SIGNATURE & DATE		PLUG CONNECTOR 18-6 ARRANGEMENT HDP20 SERIES	EP	MATL. CODE
DR	X. SANCHEZ 27JUNE01		 3850 INDUSTRIAL AVE. HEMET, CA 92545	
CHK	<i>[Signature]</i> 11/09/10		DEUTSCH INDUSTRIAL	
PE	<i>[Signature]</i> 11/09/10		B HDP26-18-6S *	
APPD	<i>[Signature]</i> 11-8-10		DWG SIZE	CODE 11139
SCALE	NONE	WT	ENVELOPE	