
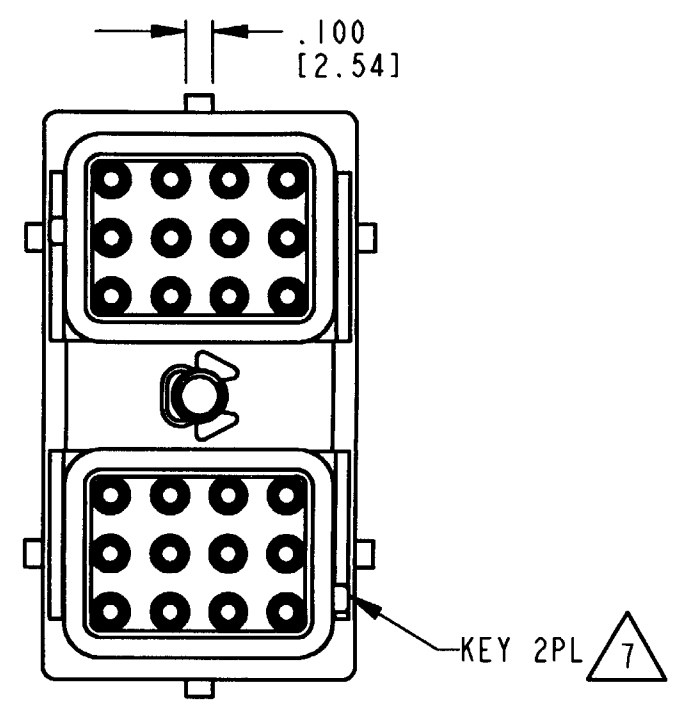


REV NC DRC16-24S *

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P17716	4-10-02	RBR

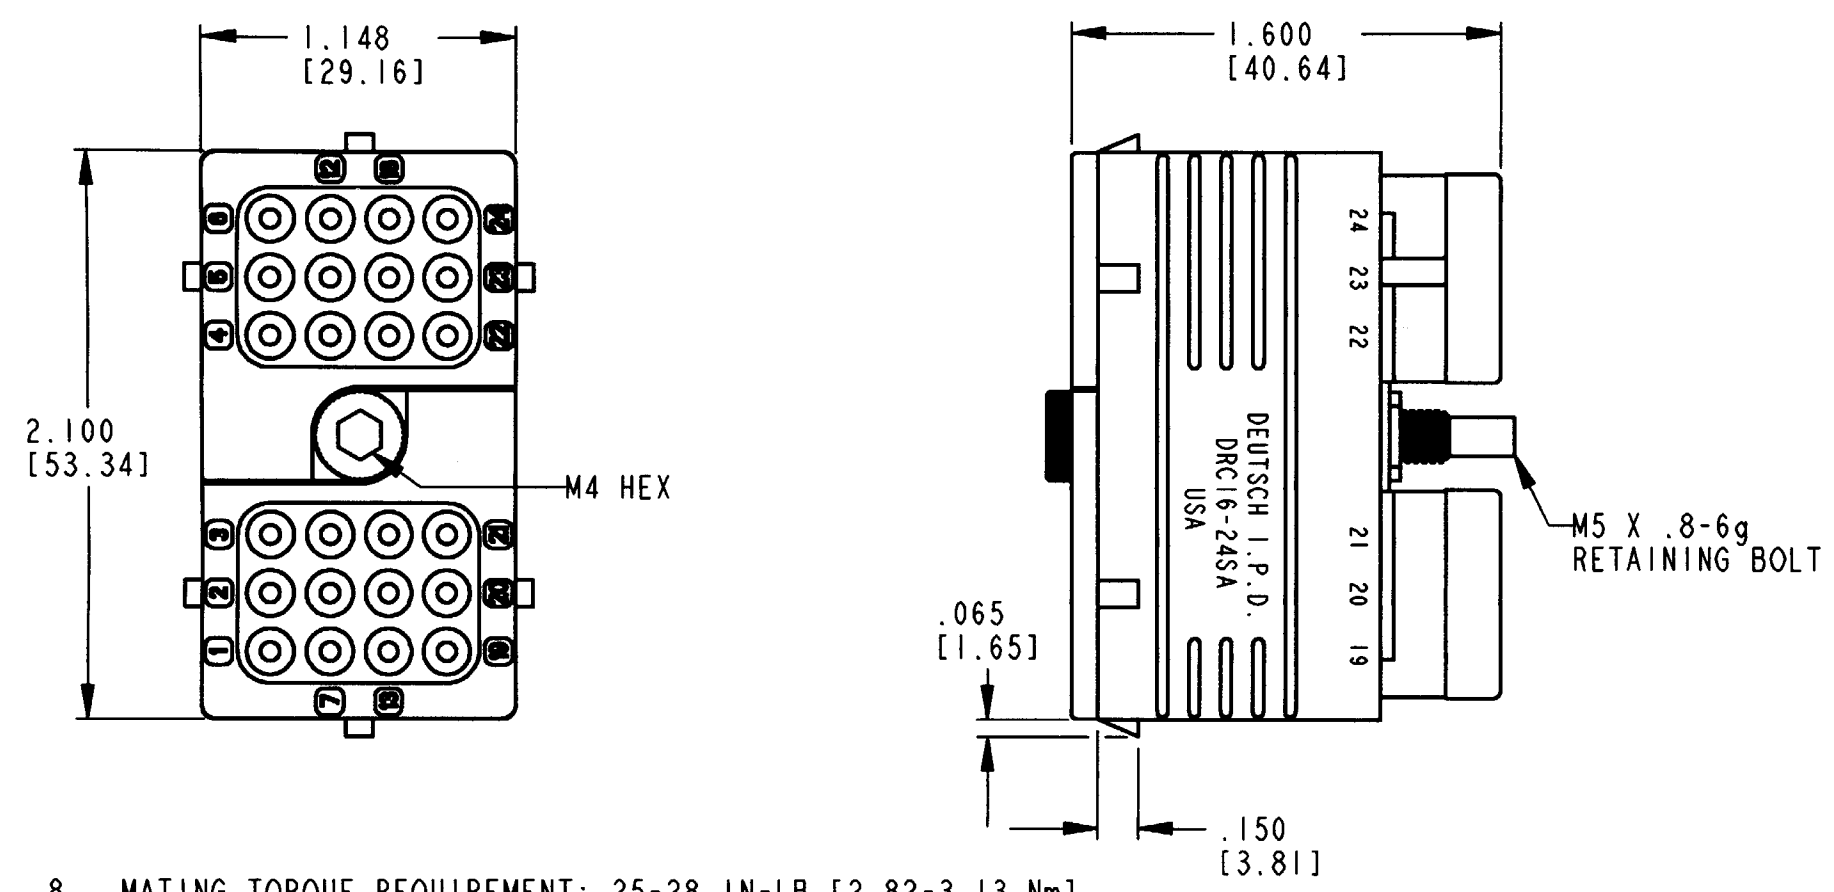

- 8. MATING TORQUE REQUIREMENT: 25-28 IN-LB [2.82-3.13 Nm].
 - 7. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.
 - 6. MATERIAL- PLUG: PLASTIC; SEAL/GROMMET: RUBBER; RETAINING BOLT: STEEL.
 - 5. THIS PLUG MATES WITH DRC10-24P*-****; DRC12-24P*-****; DRC13-24P*-****; AND DRC14-24P*-**** RECEPTACLE. (*=A,B,C,D KEYS; ****=ALL MODIFICATIONS). CONSULT FACTORY FOR MODS.
 - 4. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.
 - 3. PLUG SUPPLIED WITH DUST CAP. (NOT SHOWN).
 - 2. DIMENSION TOLERANCE: ±.025 [.64].
 - 1. DIMENSIONS ARE IN INCHES [mm].
- NOTES: UNLESS OTHERWISE SPECIFIED

MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm ²] REF ONLY
.100 [2.54]	.134 [3.40]	14-20 AWG [2.0-0.50]









SIGNATURE & DATE	
DR	D. MEYER 04/08/02
CHK	<i>[Signature]</i> 4/9/02
PE	<i>[Signature]</i> 4/8/02
APPD	<i>[Signature]</i> 4-10-02
SCALE	NONE WT

PLUG
24 SIZE 16
KEYS: A,B,C,D
COLOR: BLACK
DRC SERIES
ENVELOPE

CP	MATL. CODE
The Deutch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
B	DRC16-24S *
DWG SIZE 11139	SHEET 1 OF 2

REV NC DRC16-24S *

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
	SEE SHEET 1	4-10-02	RDR

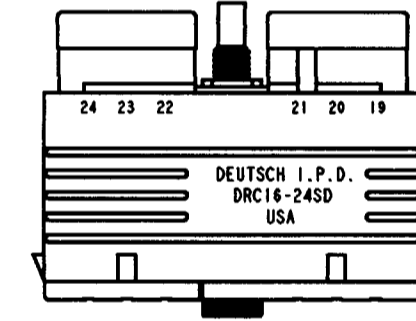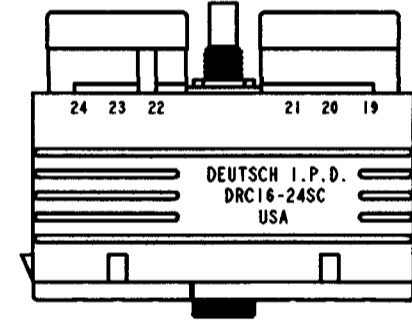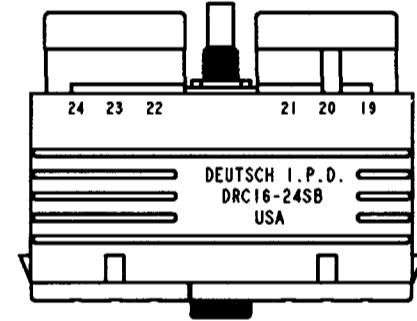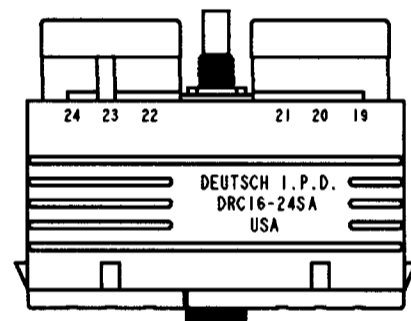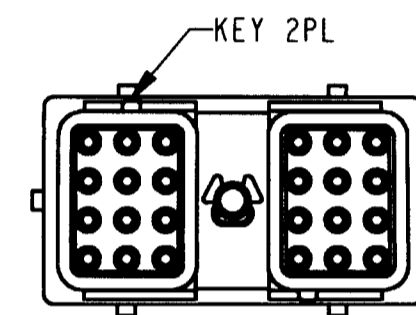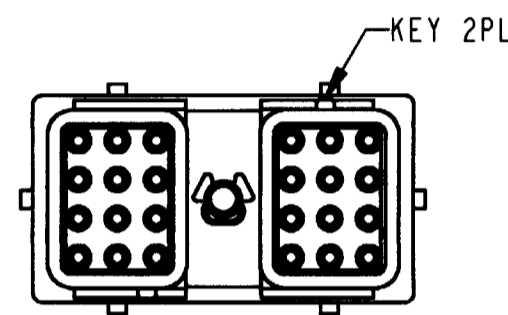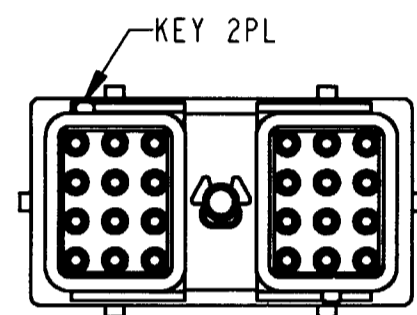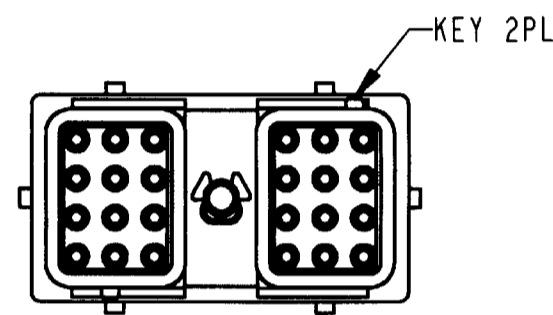

DRC16-24SA
KEY: -A-

DRC16-24SB
KEY: -B-

DRC16-24SC
KEY: -C-

DRC16-24SD
KEY: -D-

NOTES:

SIGNATURE & DATE	
DR	D. MEYER 04/08/02
CHK	<i>[Signature]</i> 4/9/02
PE	<i>[Signature]</i> 4/8/02
APPD	R. Reed 4-10-02
SCALE	NONE WT

PLUG
24 SIZE 16
KEYS: A, B, C, D
COLOR: BLACK
DRC SERIES
ENVELOPE

CP	MATL. CODE
The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
B	DRC16-24S *
DWG SIZE	CODE 11139 SHEET 2 OF 2