


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		REVISED PER ECO-15-003592	02JUN2015	VNB	DM
AI		REVISED PER ECO-16-002041	02DEC2015	SH	DM

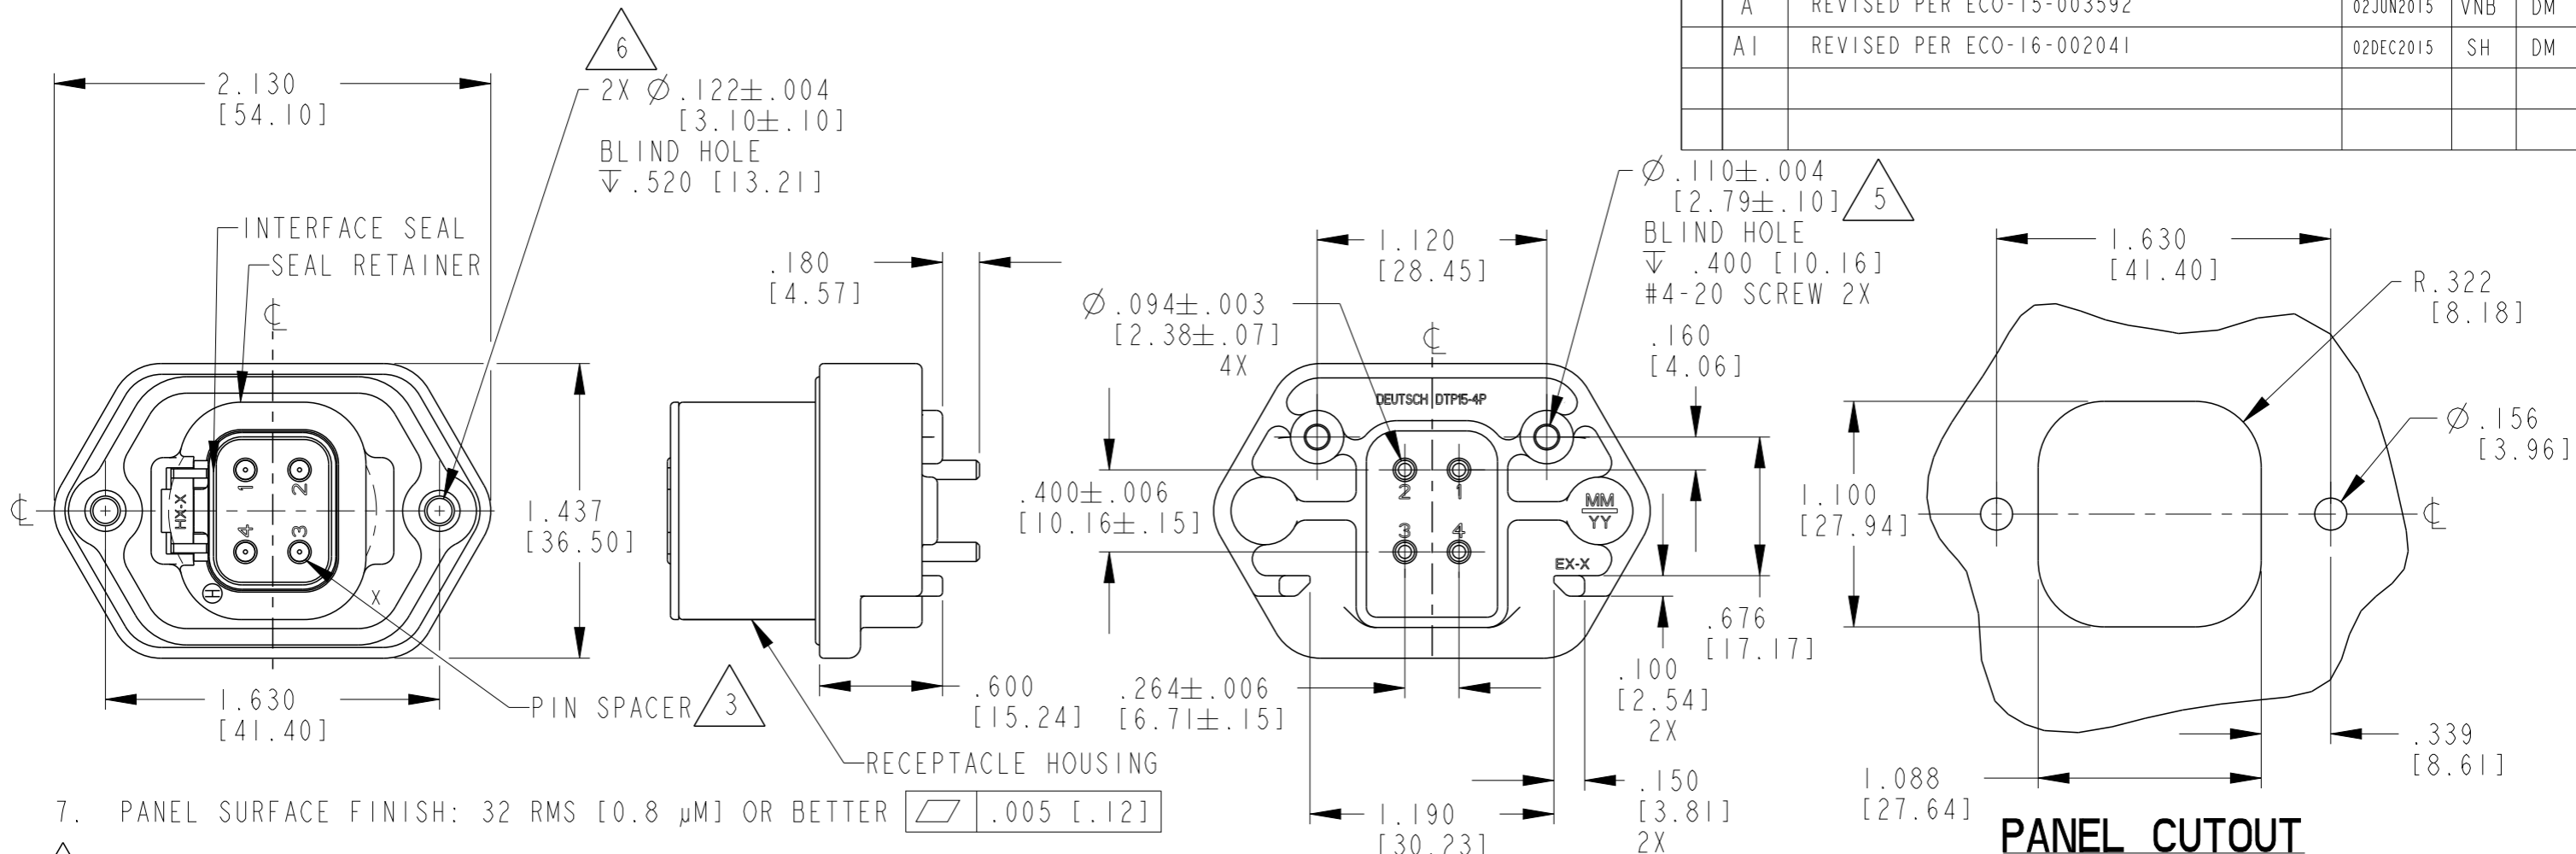

7. PANEL SURFACE FINISH: 32 RMS [0.8 μM] OR BETTER .005 [.12]

6. RECOMMENDED SCREW: 6-19 [M3.63 X 1.34] PLASTITE 48, SINGLE HELIX TORQUE: 11-15 IN-LB [1.24-1.70 NM]

5. RECOMMENDED SCREW: 4-20 [M3.12 X 1.27] PLASTITE 48, SINGLE HELIX TORQUE: 6-10 IN-LB [0.67-1.13 NM]


4. THE RECEPTACLE MATES WITH DTP06-4S-XXXX PLUG (XXXX = ALL MODIFICATIONS)

3. PIN PLATING:
MATING SIDE: TIN (ROHS)
PCB SIDE: TIN (ROHS)

2. MATERIAL:
RECEPTACLE: PA46 GF30 (BLACK)
SEAL RETAINER: PA46 GF10 (BLACK)
FLANGE SEAL: SILICONE (RED-ORANGE)
INTERFACE SEAL: SILICONE, PHENYL FLUID LUBED (GREEN)
PIN: COPPER ALLOY

1. DIMENSIONAL TOLERANCES: ±.025 [.64]
PANEL CUTOUT: ±.010 [.25]
PIN LOCATION: ±.005 [.13]
MOUNTING HOLE LOCATION: ±.010 [.25]

NOTES: UNLESS OTHERWISE SPECIFIED

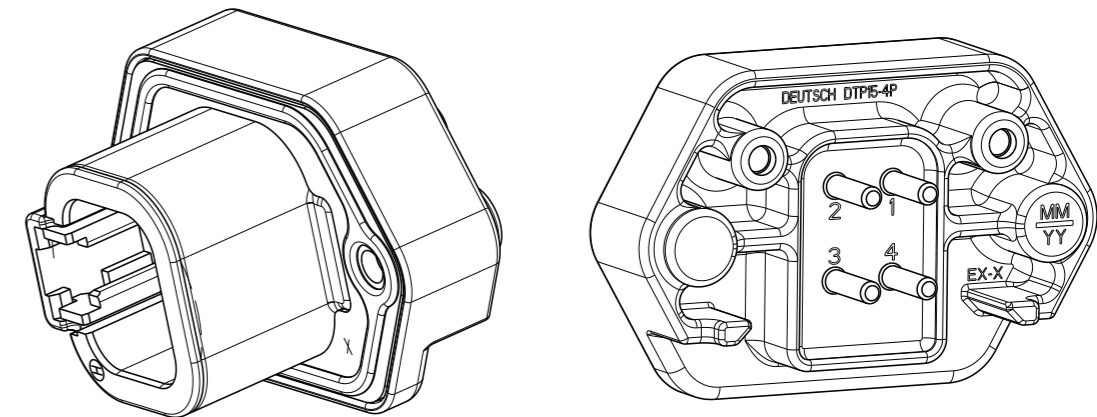

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. McKEE 17NOV2011	TE Connectivity			
DIMENSIONS: INCHES [mm]		CHK B. BYFORD 14FEB2012				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BEARD 14FEB2012	NAME PCB MOUNT RECEPTACLE 4 SIZE 12 CONTACTS DTP SERIES			
		PRODUCT SPEC -	APPLICATION SPEC -			
MATERIAL		WEIGHT -	SIZE A3	CAGE CODE 4AFU8	DRAWING NO DTP15-4P	RESTRICTED TO -
		Customer Drawing	SCALE	SHEET	OF	REV AI