

# SMD TCXO 2.0 x 1.6 x 0.75 mm 7Z Series

Oscillators  
 Series

## Features


- Temperature Stability:  $\pm 0.5$  ppm ~  $\pm 2.0$  ppm
- Operating Temperature Range: -30 °C ~ 85 °C
- Supply Voltage: 1.8 V ~ 3.3 V
- Voltage Control Function Available
- World's Thinnest Package
- Frequencies: 26 MHz, 33.6 MHz, 38.4 MHz, 40 MHz
- Applications: GPS, WiMAX, Cellular and Wireless Communications
- RoHS Compliant / Pb Free



## Electrical Specifications

Item / Type		7Z
Output Type		Clipped Sinewave
Output Load		10K $\Omega$ // 10 pF
Oscillation Mode		Fundamental
Supply Voltage		1.8 ~ 3.3 V
Frequency Range		26 ~ 52 MHz
Clipped Sinewave Output Voltage		0.8 V <sub>p-p</sub> typical
Frequency Stability	Vs. Temperature ( - 30 ~ + 85 °C )	$\pm 0.5 / \pm 2.0$ ppm
	Vs. Load ( Load varies $\pm 10$ % )	$\pm 0.2$ ppm Max.
	Vs. Supply Voltage ( V <sub>cc</sub> = Typical $\pm 0.1$ V )	$\pm 0.2$ ppm Max.
Frequency Tolerance	at 25 °C after 2 Reflows with Typical Applied to Auto Frequency Control Pin	$\pm 2.5$ ppm Max.
Slope of Frequency Drift		$\pm 0.1$ ppm / °C Typical ; $\pm 0.5$ ppm / °C Max.
Storage Temperature Range		-40 ~ +85 °C
Auto Frequency Control ( AFC ) Range (Center 0.9 V)		$\pm 7 \sim \pm 16$ ppm / V
Supply Current		2.0 mA Max.
Start-up Time		5 ms Max.
Harmonics		-5 dBc Max.
Phase Noise at 1 KHz offset		-130 dBc / Hz
Aging ( at 25 °C )		$\pm 1$ ppm / year Max.

## Dimensions

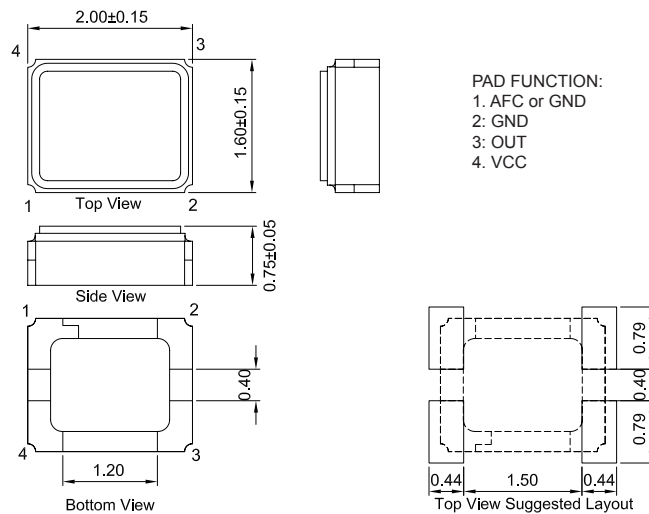

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.