

# Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

## REMINDERS

- Product information in this catalog is as of October 2011. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.
- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,( automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance. Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN' s official sales channel"). It is only applicable to the products purchased from any of TAIYO YUDEN' s official sales channel.

- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.



REFLOW

## FEATURES

- CM01 Series is Wire-wound Structured Type Common Mode Choke Coil which provides highly effective noise suppression characteristics without distorting the wave pattern of High-speed Differential Signal interface.
- Developed 1210 case-size by utilizing our wire-wound technologies. This small and wire-wound structured product has little transmission loss and keeps high common impedance up to GHz range.
- CM01S600, CM01S900 : Suitable characteristics for super high speed differential signal such as USB3.0 and so on. Cutoff frequency is 8~10GHz.
- CM01H900 : Suitable characteristics for high speed differential signal such as HDMI, DVI, Displayport and so on. Cut-off frequency is 8GHz.
- CM01U900 : Suitable characteristics for differential signal such as USB2.0, LVDS, LAN and so on. Cut-off frequency is 3GHz. High rated current of this product makes it possible to replace 2012 size product for this product.
- CM01U161 : Suitable characteristics for differential signal such as USB2.0, LVDS, LAN and so on. Cut-off frequency is 3GHz. High common impedance of this product works effectively on noise suppression.

## APPLICATIONS

- Radiated noise suppression in the High-speed Differential Signal interfaces [HDMI, Serial-ATA, IEEE1394, LVDS, and USB2.0] of LCD-TV, Blu-ray players, and PCs.
- Countermeasure for degradation of receiver sensitivity caused by high frequency noise from high-speed differential signal of Cellular phones, Data Cards and Smartphones.
- Common mode noise suppression raised from the power line and audio signal in a small device.

## OPERATING TEMP.

- -40~125°C (Including self-generated heat)


## ORDERING CODE

C M 0 1 H 9 0 0 T

1 Type		2 External Dimensions (L×W)		3 Product classification code		4 Impedance			5 Packaging	
CM	Common mode choke coil	01	1.2×1.0mm	S	USB3.0 correspondence	600	60Ω	typical at 100MHz	T	Taping
				H	HDMI/Displayport correspondence	900	90Ω	typical at 100MHz		
				U	USB2.0/LAN correspondence	161	160Ω	typical at 100MHz		

## EXTERNAL DIMENSIONS/MINIMUM QUANTITY / LAND PATTERN DESIGN


### CM01TYPE

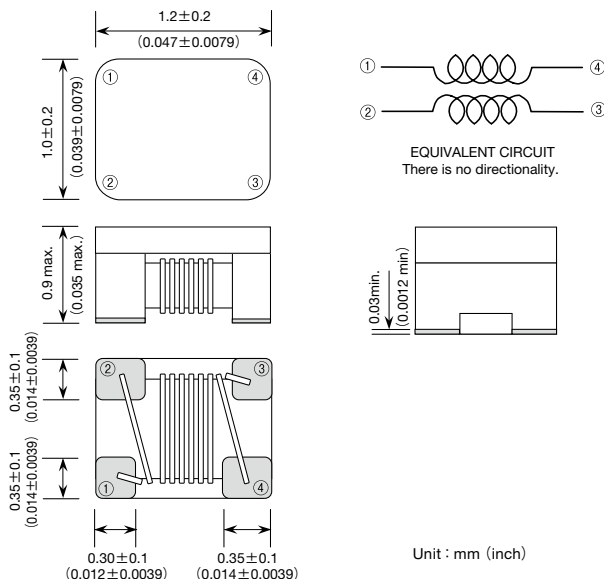

Type	Minimum Quantity (pcs.)
	Embossed tape

CM01 [2 Lines] type	3000
---------------------	------

### LAND PATTERN DESIGN

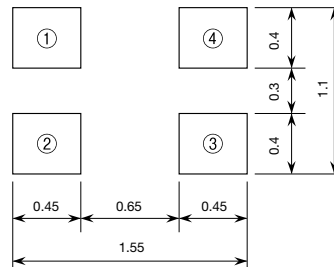



## PART NUMBERS

### CM01 TYPE



Ordering	EHS	No. of Lines	Common Impedance [Ω] (at 100MHz)	DC resistance [Ω]	Rated current [mA]	Rated voltage [V] (D.C.)	Insulation resistance [MΩ]	Cut off frequency [GHz]	Characteristic impedance [Ω]
CM01S600T	RoHS	2	60typ. 43min.	0.4max.	300max.	20max.	100min.	10.0typ.	90typ.
CM01S900T	RoHS	2	90typ. 65min.	0.5max.	280max.	20max.	100min.	8.0typ.	90typ.
CM01H900T	RoHS	2	90typ. 65min.	0.5max.	280max.	20max.	100min.	8.0typ.	100typ.
CM01U900T	RoHS	2	90typ. 65min.	0.3max.	400max.	20max.	100min.	3.0typ.	—
CM01U161T	RoHS	2	160typ. 120min.	0.6max.	260max.	20max.	100min.	3.0typ.	—

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

Impedance characteristics

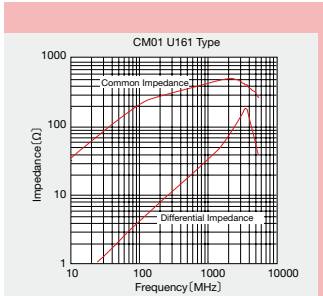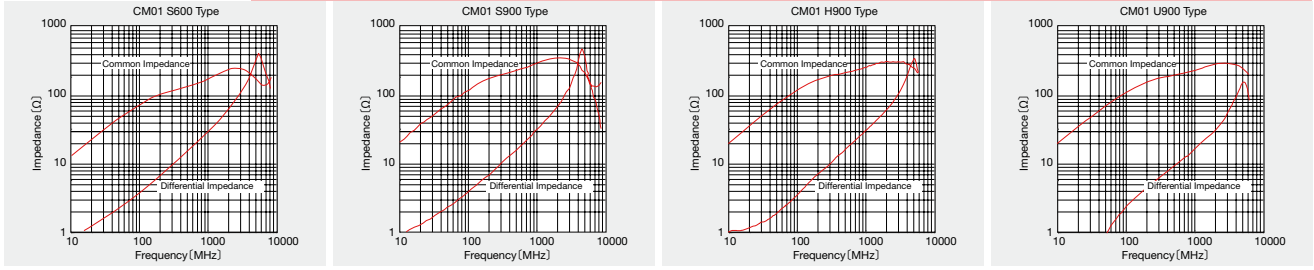

Transmission characteristic

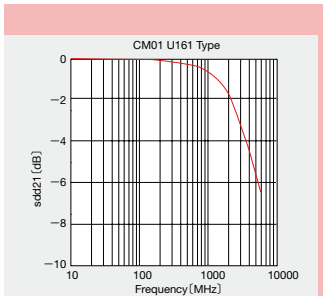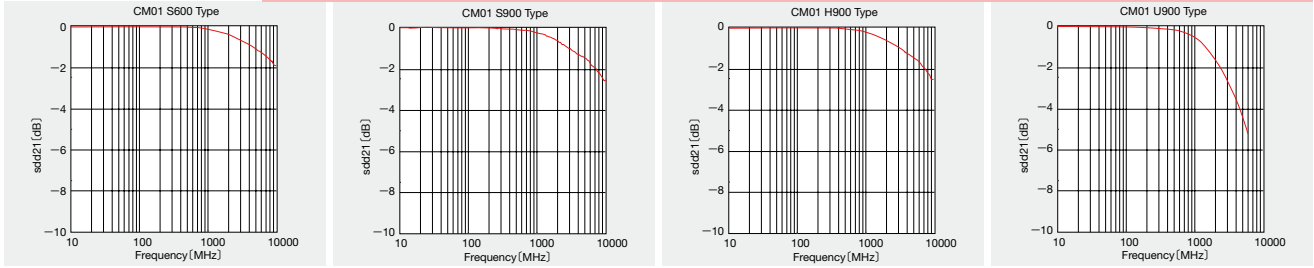

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# SMD COMMON MODE FILTERS FOR DC AND SIGNAL LINES



REFLOW

## FEATURES

- Available in embossed tape and reel.
- Highly coupled coil construction ideal for common mode noise attenuation.

## OPERATING TEMP.

- 25°C~105°C (Including self-generated heat)

## ORDERING CODE

C M 0 4 R C △ 0 1 △ T ○

<b>1</b> Type	<b>2</b> Dimensions of Core (mm)	<b>3</b> Shape	<b>4</b> Product classification code	<b>5</b> Packaging	<b>6</b> Internal code
CM Common mode BU choke coils	04 3.5 05 5.0	RC Surface mount type MC	△01~△10 △=Blank space	△T Taped products △=Blank space	△ Standard Products △=Blank space

## EXTERNAL DIMENSIONS/MINIMUM QUANTITY

<p><b>BU05MC (2 Lines) type</b></p> <p>Minimum Quantity (pcs.) Embossed tape 2500</p>	<p><b>BU05MC (3 Lines) type</b></p> <p>Minimum Quantity (pcs.) Embossed tape 2500</p>	<p><b>CM04RC (2 Lines) type</b></p> <p>Minimum Quantity (pcs.) Embossed tape 1500</p>
<p><b>CM04RC 02T</b></p> <p>Minimum Quantity (pcs.) Embossed tape 1000</p>	<p><b>CM04RC 08T</b></p> <p>Minimum Quantity (pcs.) Embossed tape 2500</p>	<p><b>CM04RC (4 Lines) type</b></p> <p>Minimum Quantity (pcs.) Embossed tape 1000</p>

The values without tolerance are for reference only.

Unit : mm (inch)

## PART NUMBERS

### CM04RC Type

Ordering code	EHS (Environmental Hazardous Substances)	No. of Lines	Impedance [Ω] (typical)	DC resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (D.C.)	Insulation resistance [MΩ] (min.)
CM04RC01T	RoHS	2	800 (at 100MHz)	0.06	1.5	50	100
CM04RC04T	RoHS		900 (at 20MHz)	0.1	1.3		
CM04RC07T	RoHS		500 (at 160MHz)	0.06	2.5		
CM04RC09T	RoHS		270 (at 200MHz)	0.03	3.0		
CM04RC10T	RoHS		100 (at 200MHz)	0.02	4.0		
CM04RC02T	RoHS	3	1000 (at 100MHz)	0.18	0.5	50	100
CM04RC08T	RoHS		1000 (at 200MHz)	0.2	0.5		
CM04RC05T	RoHS	4	800 (at 100MHz)	0.2	0.5	50	100


### BU05MC Type

Ordering code	EHS (Environmental Hazardous Substances)	No. of Lines	Impedance [Ω] (typical)	DC resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (D.C.)	Insulation resistance [MΩ] (min.)
BU05MC01T	RoHS	2	1000 (at 60MHz)	0.12	1	50	100
BU05MC08T	RoHS	3	700 (at 60MHz)	0.11	0.5		

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

Impedance -vs- Frequency characteristics

(Measured by HP4291A)

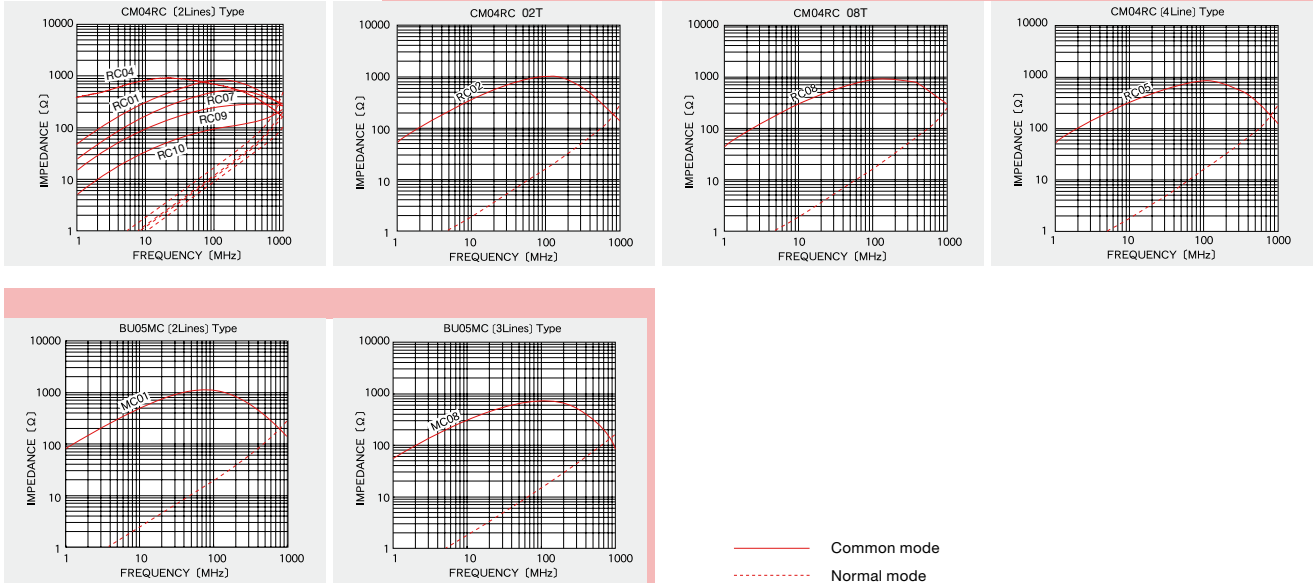


\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.


① Minimum Quantity

Type	Minimum Quantity (pcs.) Embossed tape
CM01 [2 Lines] type	3000
CM04RC [2 Lines] type	1500
CM04RC 02T	1000
CM04RC 08T	2500
CM04RC [4 Lines] type	1000
BU05MC [2 Lines] type	2500
BU05MC [3 Lines] type	2500

② Tape Material

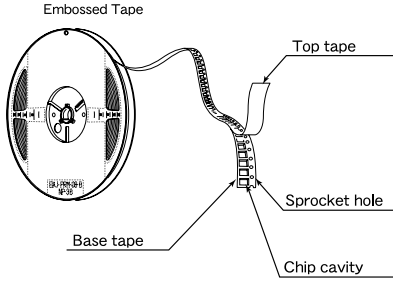


③ Leader and Blank Portion

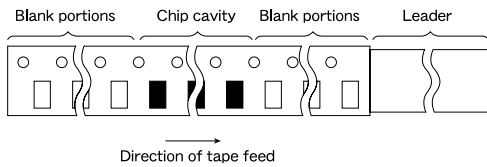

Type	Leader	Blank portions (Leader side)	Blank portions (Chip cavity side)
CM01	200~400 (7.87~15.75)	160~200 (6.30~7.87)	160 (6.30) or more
CM04RC	150 (5.89)	80 (3.14)	80 (3.14)
BU05MC	150 (5.89)	80 (3.14)	80 (3.14)

Unit : mm (inch)

④ Reel size

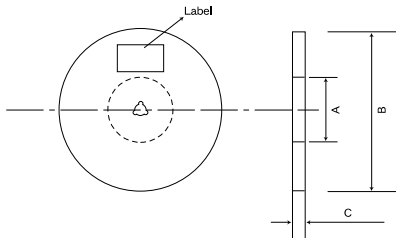


Type	A	B	C
CM01	$\phi 60+1/-0$ ( $\phi 2.36+0.039/-0$ )	$\phi 180+0/-3$ ( $\phi 7.09+0/-0.118$ )	10.0±1.5 (0.394±0.059)
CM04RC	$\phi 100\pm 1$ ( $\phi 3.94\pm 0.039$ )	$\phi 330\pm 2$ ( $\phi 12.99\pm 0.079$ )	18±1.5 (0.709±0.059)
BU05MC	$\phi 80\pm 1$ ( $\phi 3.15\pm 0.039$ )	$\phi 330\pm 2$ ( $\phi 12.99\pm 0.079$ )	13.5±1 (0.53±0.039)


Unit : mm (inch)

⑤ Taping dimensions


● Embossed tape (CM01 type)

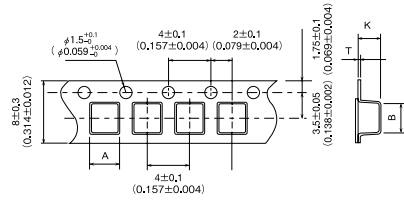


● Embossed tape (CM04RC type) 8mm pitch (0.31 inches pitch)

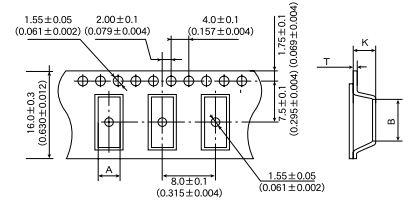

● Embossed tape (CM04RC type) 12mm pitch (0.472 inches pitch)

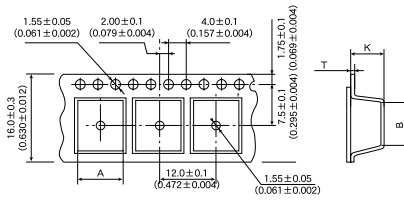


● Embossed tape (BU05MC type)

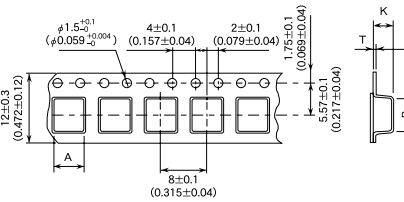

Type	Lines	Insertion pitch	Chip cavity		tape thickness	
			A	B	K	T
CM01	2	4.0±0.1	1.16±0.1	1.41±0.1	0.98±0.1	0.3max.
	2	8.0±0.1	5.7±0.1	9.65±0.1	5.2max	0.4±0.05
CM04RC	3(02T)	12.0±0.1	9.8±0.1	7.7±0.1	5.0max	0.38±0.05
	3(08T)	8.0±0.1	5.7±0.1	9.8±0.1	3.1max	0.4±0.05
	4	12.0±0.1	10.3±0.1	10.3±0.1	5.0max	0.3±0.05
BU05MC	2	8.0±0.1	5.35±1.5	5.7±0.2	3.2±0.1	0.4±0.05
	3					

Unit : mm (inch)

⑥ Top Tape Strength

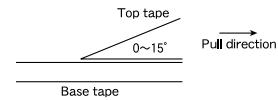

● CM01

The top tape requires a peel-off force of 0.1 to 1.0N in the direction of the arrow as illustrated above.

● CM04RC, BU05MC

The top tape requires a peel-off force of 0.1 to 0.7N in the direction of the arrow as illustrated above.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

1. Operating Temperature Range													
CM01	-40°C~+125°C												
CM04RC													
BU05MC	-25°C~+105°C												
[Test Method and Remarks] Including self-generated heat													
2. Storage Temperature Range													
CM01													
CM04RC	-40°C~+85°C												
BU05MC													
[Test Method and Remarks] -5 to +40°C in taped packaging													
3. Rated current													
CM01													
CM04RC	Within the specified tolerance.												
BU05MC													
[Test Method and Remarks] The maximum value of DC current within a specified rise of temperature individually.													
4. Impedance													
CM01													
CM04RC	Within the specified tolerance.												
BU05MC													
[Test Method and Remarks] Measuring equipment : HP 4291A or its equivalent Measuring frequency : Specified frequency													
5. DC Resisitance													
CM01													
CM04RC	Within the specified tolerance.												
BU05MC													
[Test Method and Remarks] SMD transformer · Commom mode choke coil : Measuring equipment : DC ohm meter													
6. Resistance to flexure of substrate													
CM01	Within the specified tolerance.												
CM04RC													
BU05MC	Refer to the individual specification.												
[Test Method and Remarks] According to JIS C 0051													
	<table border="1"> <thead> <tr> <th></th> <th>CM01</th> <th>CM04RC · BU05MC</th> </tr> </thead> <tbody> <tr> <td>Warp</td> <td>2mm</td> <td>3mm</td> </tr> <tr> <td>Pressing speed</td> <td colspan="2">0.5mm/sec.</td> </tr> <tr> <td>Duration</td> <td colspan="2">5±1sec.</td> </tr> </tbody> </table>		CM01	CM04RC · BU05MC	Warp	2mm	3mm	Pressing speed	0.5mm/sec.		Duration	5±1sec.	
	CM01	CM04RC · BU05MC											
Warp	2mm	3mm											
Pressing speed	0.5mm/sec.												
Duration	5±1sec.												
7. Dielectric resistance : between wires													
CM01													
CM04RC	100MΩ min.												
BU05MC													
[Test Method and Remarks] Applied voltage : Rated voltage Duration : 60 sec.													
8. Rated voltage													
CM01													
CM04RC	Within the specification.												
BU05MC													
9. Withstanding voltage : between wires													
CM01													
CM04RC	No abnormality.												
BU05MC													
[Test Method and Remarks] Applied voltage : Regulation voltage, DC250V (CM04RC), DC125V (BU05MC) Duration : 60 sec.													
10. Resistance to vibration													
CM01	No abnormality observed in appearance												
CM04RC													
BU05MC	Refer to the individual specification.												
[Test Method and Remarks] According to JIS C 0040 Directions : 2 hrs each in X, Y, and Z directions. Total : 6 hrs Frequency range : 10 to 55 to 10 Hz (1 min.) Amplitude : 1.5mm (Shall not exceed acceleration 196m/s <sup>2</sup> ) Mounting method : soldering onto printed board Recovery : At least 2 hrs of recovery under the standard condition after the test, followed by the measurement within 48 hrs.													

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

11. Solderability		
CM01	At least 90% of terminal electrode is covered by new solder.	
CM04RC	At least 75% of terminal electrode is covered by new solder.	
BU05MC		
【Test Method and Remarks】		
	CM01	CM04RC・BU05MC
Solder temperature	245±5°C	235±5°C
Duration	3±1sec.	2±0.5sec.
Immersion depth	—	Up to 0.5mm from terminal root
12. Resistance to solder Heat		
CM01	Within the specified tolerance.	
CM04RC	Refer to the individual specification.	
BU05MC		
【Test Method and Remarks】		
	CM01	CM04RC・BU05MC
Reflow soldering	Preheating : 150 to 180°C 1 to 2min	Preheating : 100 to 150°C 1 to 2min
	Peak : 255±5°C 5sec. 230±5°C 30~40sec.	Peak : 230 to 240°C within 5sec. More than 200°C within 40sec.
	Number of reflow : Within 2 times	Number of reflow : Within 2 times
Manual soldering	—	Solder temperature : 350±5°C Duration : 3±1sec. Recovery : 1 to 2hrs of recovery under the standard condition after the test.
13. Thermal shock		
CM01	Within the specified tolerance.	
CM04RC	Refer to the individual specification.	
BU05MC		
【Test Method and Remarks】		
According to JIS C 0025		
Conditions of 1 cycle		
Step	Temperature (°C)	Time (min)
	CM01	CM04RC・BU05MC
1	-40±3°C	-25±3°C
2	Room Temp.	Room Temp.
3	85±2°C	85±3°C
4	Room Temp.	Room Temp.
	CM01	CM04RC・BU05MC
Number of cycle :	CM01 : 100 cycle	CM04RC・BU05MC : 10 cycle
Recovery :	Recovery under the standard condition after removal from test chamber.	
	CM01	: Should be measured within 2 to 48hours.
	CM04RC・BU05MC	: Leave within 1 to 2 hours.
14. Loading under damp heat		
CM01	Within the specified tolerance.	
CM04RC	Refer to the individual specification.	
BU05MC		
【Test Method and Remarks】		
	CM01	CM04RC・BU05MC
Temperature	60±2°C	40±3°C
Humidity	90~95%RH	
Applied current	Rated current	
Duration	1000±24hrs	
Recovery :	Recovery under the standard condition after removal from test chamber.	
	CM01	: Should be measured within 2 to 48hours.
	CM04RC・BU05MC	: Leave within 1 to 2 hours.
15. High temperature life test		
CM01	—	
CM04RC	Refer to the individual specification.	
BU05MC		
【Test Method and Remarks】		
	CM04RC・BU05MC	
Temperature	85±3°C	
Duration	1000±24hrs	
Recovery :	Recovery under the standard condition after removal from test chamber.	
	CM01	: Should be measured within 2 to 48hours.
	CM04RC・BU05MC	: Leave within 1 to 2 hours.
16. Low Temperature life Test		
CM01	Within the specified tolerance.	
CM04RC	Refer to the individual specification.	
BU05MC		
【Test Method and Remarks】		
	CM01	CM04RC・BU05MC
Temperature	-40±2°C	-40±3°C
Applied current	1000±24hrs	
Recovery :	Recovery under the standard condition after removal from test chamber.	
	CM01	: Should be measured within 2 to 48hours.
	CM04RC・BU05MC	: Leave within 1 to 2 hours.

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



## RELIABILITY DATA

### 17. Loading at high temperature life test

CM01	Within the specified tolerance.
CM04RC	—
BU05MC	—

#### 【Test Method and Remarks】

CM01	
Temperature	105±2°C
Applied current	Rated current
Duration	1000±24hrs

Recovery : Recovery under the standard condition after removal from test chamber.

CM01 : Should be measured within 2 to 48hours.

CM04RC・BU05MC : Leave within 1 to 2 hours.

Note on standard condition :

"standard condition" referred to herein is defined as follows:

5 to 35°C of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.

When there are questions concerning measurement results:

In order to provide correlation data, the test shall be conducted under condition of 20±2°C of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.

Unless otherwise specified, all the tests are conducted under the "standard condition."

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## PRECAUTIONS

CM04RC, BU05MC, CM01

1. Circuit Design	
Precautions	<ul style="list-style-type: none"> <li>◆ Operating environment               <ol style="list-style-type: none"> <li>1. The products described in this specification are intended for use in general electronic equipment, (office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems,) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance.</li> </ol> </li> </ul>
2. PCB Design	
Precautions	<ul style="list-style-type: none"> <li>◆ Land pattern design               <ol style="list-style-type: none"> <li>1. Please contact any of our offices for a land pattern, and refer to a recommended land pattern of specifications.</li> </ol> </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Land pattern design               <ul style="list-style-type: none"> <li>Surface Mounting                   <ul style="list-style-type: none"> <li>• Mounting and soldering conditions should be checked beforehand.</li> <li>• Applicable soldering process to these products is reflow soldering only.</li> <li>• Recommended Land Patterns</li> </ul> </li> </ul> </li> </ul> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p><b>[CM04RC]</b> (2 Lines)</p> </div> <div style="text-align: center;"> <p>(3 Lines)</p> </div> <div style="text-align: center;"> <p>(4 Lines)</p> </div> <div style="text-align: center;"> <p><b>[BU05MC]</b></p> </div> <div style="text-align: center;"> <p><b>[CM01]</b> Refer to the external dimension drawing for the pin location.</p> </div> </div> <p style="text-align: right;">Unit: mm</p>
3. Considerations for automatic placement	
Precautions	<ul style="list-style-type: none"> <li>◆ Adjustment of mounting machine               <ol style="list-style-type: none"> <li>1. Excessive impact load should not be imposed on the products when mounting onto the PC boards.</li> <li>2. Mounting and soldering conditions should be checked beforehand.</li> </ol> </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Adjustment of mounting machine               <ol style="list-style-type: none"> <li>1. When installing products, care should be taken not to apply distortion stress as it may deform the products.</li> </ol> </li> </ul>
4. Soldering	
Precautions	<ul style="list-style-type: none"> <li>◆ Reflow soldering               <ol style="list-style-type: none"> <li>1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified.</li> <li>2. This product can be used reflow soldering only.</li> <li>3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering.</li> </ol> </li> <li>◆ Lead free soldering               <ol style="list-style-type: none"> <li>1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently.</li> </ol> </li> <li>◆ Recommended conditions for using a soldering iron               <ul style="list-style-type: none"> <li>[CM04RC, BU05MC]                   <ul style="list-style-type: none"> <li>• Put the soldering iron on the land-pattern.</li> <li>• Soldering iron's temperature - Below 350°C</li> <li>• Duration - 3 seconds or less</li> <li>• The soldering iron should not directly touch the inductor.</li> </ul> </li> <li>[CM01]                   <ul style="list-style-type: none"> <li>• Please do not conduct an adjustment with a soldering iron because the wire would be broken due to its thinness.</li> </ul> </li> </ul> </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Reflow soldering               <ol style="list-style-type: none"> <li>1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ol> </li> </ul>
5. Cleaning	
Precautions	<ul style="list-style-type: none"> <li>◆ Cleaning conditions               <ol style="list-style-type: none"> <li>1. Please contact any of our offices for a cleaning.</li> </ol> </li> </ul>
6. Handling	
Precautions	<ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. Keep the product away from all magnets and magnetic objects.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board.</li> <li>2. Board separation should not be done manually, but by using the appropriate devices.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. Please do not give the product any excessive mechanical shocks.</li> <li>2. Please do not add any shock and power to a product in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Please do not push to add any pressure to a winding part. Please do not give any shock and push onto an exposed part of ferrite cores.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. Please avoid accumulation of a packing box as much as possible.</li> </ol> </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. There is a case that a characteristic varies with magnetic influence.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. There is a case to be damaged by a mechanical shock.</li> <li>2. There is a case to be broken by the handling in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. An excessive shock or stress may cause a damage to the product or a deterioration of a characteristic.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products.</li> </ol> </li> </ul>
7. Storage conditions	
Precautions	<ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.                   <ul style="list-style-type: none"> <li>• Recommended conditions Ambient temperature : 0~40°C, Humidity : Below 70% RH</li> </ul> </li> </ol> <p>The ambient temperature must be kept below 30°C. Even under ideal storage conditions, the solderability of electrodes may decrease gradually. For this reason, the products should be used within one year from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage.</p> </li></ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.</li> </ol> </li> </ul>

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# LEADED COMMON MODE FILTERS FOR DC AND SIGNAL LINES



WAVE

## FEATURES

- Highly reliable, compact and lightweight
- Easily inserted into the PCB

## APPLICATIONS

- TLF Type :**  
Countermeasure for noise in the low-frequency (AM) broad-casting band. Shields against radiated emissions in the broadcasting frequency for multi-functional telephone sets. PBXs, faxes, etc.
- CM/BU Type :**  
Countermeasure for noise in the high-frequency (MHz) band

## OPERATING TEMP.

TLF Type	-25°C~+105°C
CM Type	-25°C~+105°C

(Including self-generated heat)

## ORDERING CODE

[TLF Type]

T L F  $\triangle$  9 U B H 3 0 2 W K 1

<b>1 Type</b>	<b>2 Dimensions of core</b>	<b>3 Shape</b>	<b>4 Nominal inductance (<math>\mu</math>H)</b>	<b>5 Inductance tolerance (%)</b>	<b>6 Internal code</b>
TLF Line filter	$\triangle$ 9 9mm $\triangle$ =Blank space	UB $\triangle$ U core, vertically split wound UBH U core, horizontally split wound $\triangle$ =Blank space	example 302 3000 203 20000	W +100 -10	K1 Adhesive fixation

[CM-BU Type]

C M 0 5 R A  $\triangle$  0 6  $\bigcirc$

<b>1 Type</b>	<b>2 Core dimensions (mm)</b>	<b>3 Shape</b>	<b>4 Product classification code</b>	<b>5 Internal code</b>
CM BU Common mode choke coil	05 4.8 08 8.0 12 12.0	RA Double-wire lead RB Pin type with base	$\triangle$ 01~ $\triangle$ 20 $\triangle$ =Blank space	$\triangle$ Standard product $\triangle$ =Blank space

## EXTERNAL DIMENSIONS/MINIMUM QUANTITY

TLF9UB Type	TLF9UB H Type	CM $\square$ RA Type / BU08RA Type																								
<p>11.0max (0.433max), 17.0max (0.669max), 16.0max (0.630max), <math>\phi</math>0.6 (<math>\phi</math>0.024), 4.5<math>\pm</math>1.0 (0.177<math>\pm</math>0.039), 8.0<math>\pm</math>0.5 (0.315<math>\pm</math>0.020), 7.0<math>\pm</math>0.5 (0.276<math>\pm</math>0.020)</p> <p>Minimum Quantity (pcs.) Box 500</p>	<p>15.0max (0.591max), 17.0max (0.669max), 12.0max (0.472max), <math>\phi</math>0.6 (<math>\phi</math>0.024), 4.5<math>\pm</math>1.0 (0.177<math>\pm</math>0.039), 8.0<math>\pm</math>0.5 (0.315<math>\pm</math>0.020), 7.0<math>\pm</math>0.5 (0.276<math>\pm</math>0.020)</p> <p>Minimum Quantity (pcs.) Box 500</p>	<table border="1"> <thead> <tr> <th>Type</th> <th>Minimum Quantity (pcs.)</th> </tr> <tr> <th>Box</th> <th>Bulk</th> </tr> </thead> <tbody> <tr> <td>CM05RA06</td> <td>500</td> </tr> <tr> <td>CM08RA <math>\square</math></td> <td>250</td> </tr> <tr> <td>CM12RA02</td> <td>100</td> </tr> <tr> <td>BU08RA <math>\square</math></td> <td>200</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Type</th> <th>W (max.)</th> <th>T (max.)</th> </tr> </thead> <tbody> <tr> <td>CM05</td> <td>6.5 (0.256)</td> <td>3.0 (0.118)</td> </tr> <tr> <td>CM08, BU08</td> <td>11.0 (0.433)</td> <td>6.0, 7.0 (0.024, 0.276)</td> </tr> <tr> <td>CM12</td> <td>15.5 (0.610)</td> <td>7.0 (0.276)</td> </tr> </tbody> </table>	Type	Minimum Quantity (pcs.)	Box	Bulk	CM05RA06	500	CM08RA $\square$	250	CM12RA02	100	BU08RA $\square$	200	Type	W (max.)	T (max.)	CM05	6.5 (0.256)	3.0 (0.118)	CM08, BU08	11.0 (0.433)	6.0, 7.0 (0.024, 0.276)	CM12	15.5 (0.610)	7.0 (0.276)
Type	Minimum Quantity (pcs.)																									
Box	Bulk																									
CM05RA06	500																									
CM08RA $\square$	250																									
CM12RA02	100																									
BU08RA $\square$	200																									
Type	W (max.)	T (max.)																								
CM05	6.5 (0.256)	3.0 (0.118)																								
CM08, BU08	11.0 (0.433)	6.0, 7.0 (0.024, 0.276)																								
CM12	15.5 (0.610)	7.0 (0.276)																								
CM05RB (2Lines Type)	CM08RB (2Lines) Type	CM08RB (4Lines) Type																								
<p>9.5 max (0.374 max.), 5.5 max (0.217 max.), 5.0 max (0.197 max.), 5.08<math>\pm</math>0.5 (0.200<math>\pm</math>0.020), 5.08<math>\pm</math>0.5 (0.200<math>\pm</math>0.020)</p> <p>Minimum Quantity (pcs.) Box 1000</p>	<p>13.0 max (0.512 max.), 9.5 max (0.374 max.), 14.5 max (0.571 max.), 5.08<math>\pm</math>0.5 (0.198<math>\pm</math>0.039) (0.571 max.), 5.08<math>\pm</math>0.5 (0.200<math>\pm</math>0.020), 5.08<math>\pm</math>0.5 (0.200<math>\pm</math>0.020), <math>\phi</math>0.7 (<math>\phi</math>0.028)</p> <p>Minimum Quantity (pcs.) Box 500</p>	<p>13.5 max (0.513 max.), 11.5 max (0.453 max.), 5.08<math>\pm</math>1.0 (0.2 max.) (0.42 max.), 5.08<math>\pm</math>0.5 (0.198<math>\pm</math>0.039) (0.42 max.), 5.08<math>\pm</math>0.5 (0.200<math>\pm</math>0.020), 5.08<math>\pm</math>0.5 (0.200<math>\pm</math>0.020), <math>\phi</math>0.7 (<math>\phi</math>0.028)</p> <p>Minimum Quantity (pcs.) Box 500</p>																								

Unit : mm (inch)



\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## PART NUMBERS


Ordering code	EHS (Environmental Hazardous Substances)	No. of lines	Inductance [ $\mu\text{H}$ ] [ $\pm 10\%$ ]	DC resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] D.C.	Insulation resistance [M $\Omega$ ] (min.)	Impedance [K $\Omega$ ] (Reference values)
TLF9UBH 302WK1	RoHS	2	3000	1.5	0.4	50	100	$\geq 20$ (at 1MHz)
TLF9UB 302WK1	RoHS							
TLF9UBH 802WK1	RoHS		8000	3.0	0.3			$\geq 40$ (at 700kHz)
TLF9UB 802WK1	RoHS							
TLF9UBH 203WK1	RoHS							20000
TLF9UB 203WK1	RoHS							

Ordering code	EHS (Environmental Hazardous Substances)	No. of lines	Inductance [ $\mu\text{H}$ ] [at 1kHz]	Impedance [ $\Omega$ ] (typical)	DC resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] D.C.	Insulation resistance [M $\Omega$ ] (min.)
CM05RA 06	RoHS	2	0.7 min.	700 (at 200MHz)	0.050	1.5	50	100
BU08RA 11	RoHS		0.7~1.3	1000 (at 250MHz)	0.013	4.0		
BU08RA 16	RoHS		1.19~2.21	1200 (at 200MHz)	0.011	3.0		
CM08RA 17	RoHS		15.0 min.	2000 (at 80MHz)	0.040	2.4		
CM08RA 20	RoHS		6.0 min.	500 (at 200MHz)	0.020	5.5		
CM12RA 02	RoHS		10.0 min.	2000 (at 80MHz)	0.040	3.0		
CM05RB 01	RoHS		7.0 min.	700 (at 70MHz)	0.050	2.0		
CM05RB 03	RoHS		15.0 min.	1400 (at 100MHz)	0.060	1.5		
CM08RB 01	RoHS		40.0 min.	2500 (at 30MHz)	0.040	2.0		
CM08RB 02	RoHS		15.0 min.	2000 (at 50MHz)	0.040	2.4		
CM08RB 04	RoHS	4	110.0 min.	2000 (at 70MHz)	0.040	3.0		
CM08RB 05	RoHS		6.0 min.	450 (at 100MHz)	0.020	4.0		
CM08RB 03	RoHS		15.0 min.	1000 (at 50MHz)	0.050	2.0		

## ELECTRICAL CHARACTERISTICS

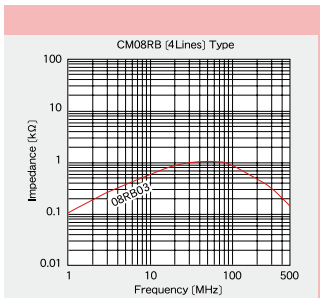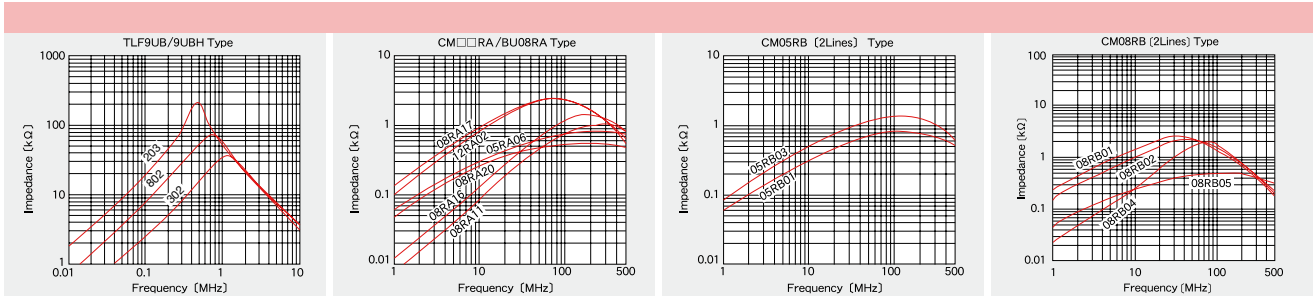

Measuring conditions  
Equipment : HP4291A, HP4294A Vosc : 0.5V (CM/BU type)(TLF type)

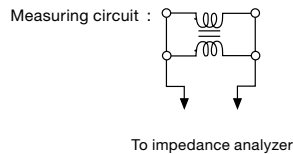

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

# LEADED COMMON MODE CHOKE COILS FOR AC LINES



WAVE

## FEATURES

- TLH10UAH TYPE : Thin configuration (Hybrid choke, Height 10mmMAX)
- TLH10UA(B) TYPE : Ordinary configuration (Hybrid choke)
- TLF10UAH TYPE : Thin configuration (Height 10mmMAX)
- TLF9UA(H)K1 TYPE : Small-sized configuration
- TLF14CB(H)K1 TYPE : Ordinary configuration
- TLF24HB(H)K1TYPE : Large current capacity for power supply line use

## APPLICATIONS

- As a preventive measure against noise terminal voltage or power supply noise in TV's SW power supplies, NC machines, computer systems, peripheral units, measuring instruments, and controllers.

## OPERATING TEMP.

-25°C~+105°C (Including self-generated heat)

## ORDERING CODE

T L F 1 4 C B △ 1 0 3 △ 0 R 7 K 1


<b>1 Type</b>	<b>2 Core dimensions (mm)</b>	<b>3 Shape</b>	<b>4 Nominal Inductance (μH)</b>	<b>5 Inductance tolerance (%)</b>	<b>6 Rated current (A)</b>	<b>7 Internal code</b>
TLF Common mode choke TLH Hybrid choke	△9 9 10 10 14 14 24 24 △=Blank space	UA△ U core, vertical type UAH U core, horizontal type UB△ U core, vertically split wound CB△ Square type core vertically split wound CBH Square type core horizontally split wound HB△ Double-square type core vertically split wound HBH Double-square type core horizontally split wound △=Blank space	example 102 1000 103 10000	△ Nominal Values or higher W +100/-10 △=Blank space	R54 0.54 OR8 0.8 *R=decimal point	K1 Adhesive fixation

## EXTERNAL DIMENSIONS/MINIMUM QUANTITY

<p><b>TLH10UAH Type</b></p> <p>24.5max (0.965max) 28.0max 10max (0.394max) 3.5±0.5 (0.138±0.020) φ0.7±0.1 (0.028±0.004) 10±0.5 (0.394±0.020) 13±0.5 (0.512±0.020)</p>	<p><b>TLH10UA Type</b></p> <p>16.0max (0.630max) 18.0max (0.708max) 17.5max (0.689max) 3.5±0.5 (0.138±0.020) φ0.7±0.1 (0.028±0.004) 13.0±0.5 (0.512±0.020) 10.0±0.5 (0.394±0.020)</p>	<p><b>TLH10UB Type</b></p> <p>16.0max (0.630max) 18.0max (0.709max) 17.5max (0.689max) 3.5±0.5 (0.138±0.020) φ0.7±0.1 (0.028±0.004) 13.0±0.5 (0.512±0.020) 10.0±0.5 (0.394±0.020)</p>
<p><b>TLF10UAH Type</b></p> <p>24.5max (0.965max) 28.0max 10max (0.394max) 3.5±0.5 (0.138±0.020) φ0.7±0.1 (0.028±0.004) 10±0.5 (0.394±0.020) 13±0.5 (0.512±0.020)</p>	<p><b>TLF 9UA Type</b></p> <p>11.0max (0.433max) 17.0max (0.669max) 16.0max (0.630max) 4.5±1.0 (0.177±0.039) φ0.6 (φ0.024) 8.0±0.5 (0.315±0.020) 7.0±0.5 (0.276±0.020)</p>	<p><b>TLF 9UAH Type</b></p> <p>15.0max (0.591max) 17.0max (0.669max) 12.0max (0.472max) 4.5±1.0 (0.177±0.039) φ0.6 (φ0.024) 8.0±0.5 (0.315±0.020) 7.0±0.5 (0.276±0.020)</p>
<p><b>TLF14CB Type</b></p> <p>17.0max (0.669max) 22.0max (0.867max) 23.0max (0.906max) 4.0±1.0 (0.157±0.039) φ0.8 (φ0.032) 13.0±0.5 (0.512±0.020) 10.0±0.5 (0.394±0.020)</p>	<p><b>TLF14CBH Type</b></p> <p>23.0max (0.906max) 22.0max (0.867max) 17.5max (0.690max) 4.0±1.0 (0.157±0.039) φ0.8 (φ0.032) 17.0±0.5 (0.670±0.020) 13.0±0.5 (0.512±0.020)</p>	<p><b>TLF24HB Type</b></p> <p>30max (1.181max) 26.0max (1.024max) 4±1 (0.157±0.039) 10±0.5 (0.394±0.020) φ0.8 (φ0.031) 19.0max (0.748max) 13.0±0.5 (0.512±0.020)</p>

Unit : mm (inch)

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

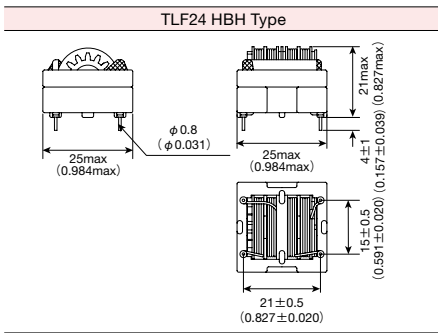

Type	Minimum Quantity (pcs.) Box
TLH Type	500
TLF Type	

## PART NUMBERS

### ● TLH10UAH Type (Hybrid choke)

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	Normal Mode Inductance [mH] (Typ.)	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLH10UAH872 0R7	RoHS	8.7	min.	0.70	1.00	0.7	AC250	0.1~10
TLH10UAH992 0R6	RoHS	9.9		0.85	1.35	0.6		
TLH10UAH123 0R5	RoHS	12.0		1.06	1.60	0.5		

### ● TLH10UA Type (Hybrid choke)

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	Normal Mode Inductance [mH] (Typ.)	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLH10UA 901 2R0	RoHS	0.9	min.	0.067	0.089	2.0	AC250	0.1~10
TLH10UA 112 1R8	RoHS	1.1		0.087	0.126	1.8		
TLH10UA 152 1R6	RoHS	1.5		0.126	0.171	1.6		
TLH10UA 212 1R4	RoHS	2.1		0.160	0.222	1.4		
TLH10UA 282 1R2	RoHS	2.8		0.215	0.272	1.2		
TLH10UA 432 1R0	RoHS	4.3		0.330	0.398	1.0		
TLH10UA 622 0R8	RoHS	6.2		0.430	0.578	0.8		
TLH10UA 872 0R7	RoHS	8.7		0.644	0.878	0.7		
TLH10UA 992 0R6	RoHS	9.9		0.836	1.138	0.6		
TLH10UA 143 0R5	RoHS	14.0		1.256	1.567	0.5		

### ● TLH10UB Type (Hybrid choke)

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	Normal Mode Inductance [mH] (Typ.)	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLH10UB 701 2R0	RoHS	0.7	min.	0.056	0.097	2.0	AC250	0.1~10
TLH10UB 112 1R7	RoHS	1.1		0.068	0.133	1.7		
TLH10UB 142 1R4	RoHS	1.4		0.113	0.214	1.4		
TLH10UB 232 1R2	RoHS	2.3		0.150	0.274	1.2		
TLH10UB 352 1R0	RoHS	3.5		0.232	0.422	1.0		
TLH10UB 442 0R8	RoHS	4.4		0.328	0.624	0.8		
TLH10UB 872 0R7	RoHS	8.7		0.580	0.982	0.7		
TLH10UB 972 0R6	RoHS	9.7		0.735	1.314	0.6		
TLH10UB 113 0R5	RoHS	11.0		0.877	1.577	0.5		

### ● TLF10UAH Type

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF10UAH872 0R7	RoHS	8.7	min.	1.00	0.7	AC250	0.1~10
TLF10UAH992 0R6	RoHS	9.9		1.35	0.6		
TLF10UAH123 0R5	RoHS	12.0		1.60	0.5		

### ● TLF 9UA Type

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF 9UA 102W0R8K1	RoHS	1.0	+100%/-10%	0.5	0.80	AC250	0.1~10
TLF 9UA 202WR54K1	RoHS	2.0		1.0	0.54		
TLF 9UA 302WR42K1	RoHS	3.0		1.5	0.42		
TLF 9UA 502WR32K1	RoHS	5.0		2.5	0.32		
TLF 9UA 802WR25K1	RoHS	8.0		4.0	0.25		
TLF 9UA 103WR23K1	RoHS	10.0		4.5	0.23		

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## PART NUMBERS

### ● TLF 9UAH Type

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF 9UAH102W0R8K1	RoHS	1.0	+100%/−10%	0.5	0.80	AC250	0.1~10
TLF 9UAH202WR54K1	RoHS	2.0		1.0	0.54		
TLF 9UAH302WR42K1	RoHS	3.0		1.5	0.42		
TLF 9UAH502WR32K1	RoHS	5.0		2.5	0.32		
TLF 9UAH802WR25K1	RoHS	8.0		4.0	0.25		
TLF 9UAH103WR23K1	RoHS	10.0		4.5	0.23		

### ● TLF14CB Type

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF14CB 102 1R5K1	RoHS	1.0	min.	0.10	1.5	AC250	0.1~10
TLF14CB 222 1R2K1	RoHS	2.2		0.18	1.2		
TLF14CB 332 1R0K1	RoHS	3.3		0.32	1.0		
TLF14CB 472 1R0K1	RoHS	4.7		0.38	1.0		
TLF14CB 562 0R8K1	RoHS	5.6		0.42	0.8		
TLF14CB 682 0R8K1	RoHS	6.8		0.60	0.8		
TLF14CB 103 0R7K1	RoHS	10.0		0.85	0.7		
TLF14CB 223 0R4K1	RoHS	22.0		1.7	0.4		
TLF14CB 333 0R3K1	RoHS	33.0		2.7	0.3		
TLF14CB 473 0R2K1	RoHS	47.0		3.6	0.2		
TLF14CB 563 0R2K1	RoHS	56.0		5.0	0.2		
TLF14CB 683 0R2K1	RoHS	68.0		6.5	0.2		

### ● TLF14CBH Type

Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF14CBH102 1R5K1	RoHS	1.0	min.	0.10	1.5	AC250	0.1~10
TLF14CBH222 1R2K1	RoHS	2.2		0.18	1.2		
TLF14CBH332 1R0K1	RoHS	3.3		0.32	1.0		
TLF14CBH472 1R0K1	RoHS	4.7		0.38	1.0		
TLF14CBH562 0R8K1	RoHS	5.6		0.42	0.8		
TLF14CBH682 0R8K1	RoHS	6.8		0.60	0.8		
TLF14CBH103 0R7K1	RoHS	10.0		0.85	0.7		
TLF14CBH223 0R4K1	RoHS	22.0		1.7	0.4		
TLF14CBH333 0R3K1	RoHS	33.0		2.7	0.3		
TLF14CBH473 0R2K1	RoHS	47.0		3.6	0.2		
TLF14CBH563 0R2K1	RoHS	56.0		5.0	0.2		
TLF14CBH683 0R2K1	RoHS	68.0		6.5	0.2		

### ● TLF24HB Type


Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF24HB 122 3R0K1	RoHS	1.2	min.	0.045	3.0	AC250	0.1~10
TLF24HB 222 2R2K1	RoHS	2.2		0.080	2.2		
TLF24HB 272 2R0K1	RoHS	2.7		0.090	2.0		
TLF24HB 332 1R8K1	RoHS	3.3		0.120	1.8		
TLF24HB 392 1R5K1	RoHS	3.9		0.130	1.5		
TLF24HB 562 1R4K1	RoHS	5.6		0.187	1.4		
TLF24HB 682 1R2K1	RoHS	6.8		0.254	1.2		
TLF24HB 822 1R0K1	RoHS	8.2		0.275	1.0		
TLF24HB 103 1R0K1	RoHS	10.0		0.345	1.0		
TLF24HB 123 0R9K1	RoHS	12.0		0.350	0.9		
TLF24HB 183 0R8K1	RoHS	18.0		0.550	0.8		
TLF24HB 273 0R6K1	RoHS	27.0		0.880	0.6		
TLF24HB 333 0R5K1	RoHS	33.0		1.150	0.5		

### ● TLF24HBH Type


Ordering code	EHS	Common Mode Inductance [mH]	Inductance Tolerance	DC Resistance [ $\Omega$ ] (max.)	Rated current [A] (max.)	Rated voltage [V] (max.)	Applicable frequency [MHz] Reference
TLF24HBH122 3R0K1	RoHS	1.2	min.	0.045	3.0	AC250	0.1~10
TLF24HBH222 2R2K1	RoHS	2.2		0.080	2.2		
TLF24HBH272 2R0K1	RoHS	2.7		0.090	2.0		
TLF24HBH332 1R8K1	RoHS	3.3		0.120	1.8		
TLF24HBH392 1R5K1	RoHS	3.9		0.130	1.5		
TLF24HBH562 1R4K1	RoHS	5.6		0.187	1.4		
TLF24HBH682 1R2K1	RoHS	6.8		0.254	1.2		
TLF24HBH822 1R0K1	RoHS	8.2		0.275	1.0		
TLF24HBH103 1R0K1	RoHS	10.0		0.345	1.0		
TLF24HBH123 0R9K1	RoHS	12.0		0.350	0.9		
TLF24HBH183 0R8K1	RoHS	18.0		0.550	0.8		
TLF24HBH273 0R6K1	RoHS	27.0		0.880	0.6		
TLF24HBH333 0R5K1	RoHS	33.0		1.150	0.5		

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

Impedance-Frequency characteristic

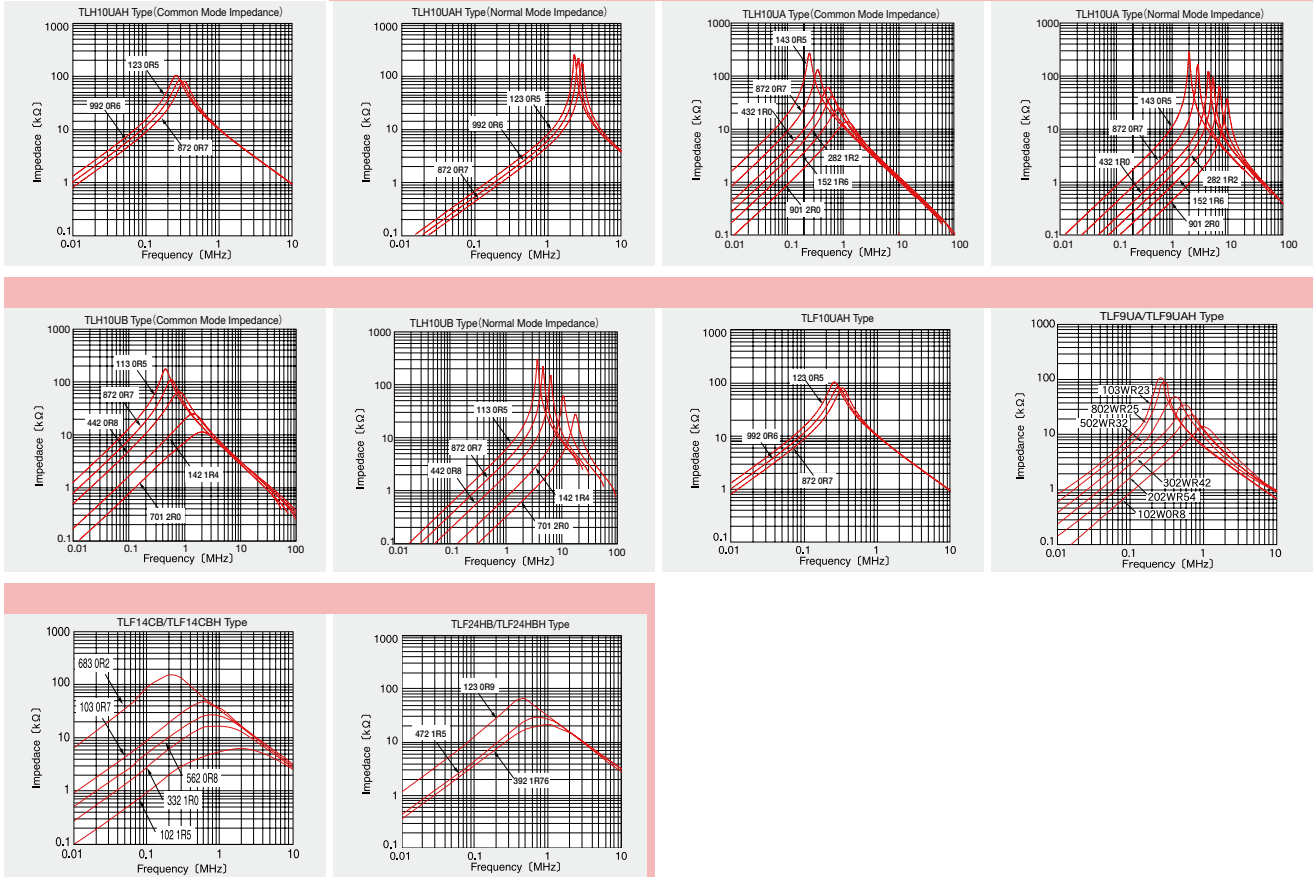

Test conditions  
Equipment : HP-4294A



\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.



## PACKAGING

### Minimum Quantity

#### ● CM/BU Type

Type	Minimum Quantity (pcs.)	
	Box	Bulk
CM05RA06	—	500
CM05RB□□	1000	—
CM08RA□□	—	250
CM08RB□□	500	—
CM12RA02	—	100
BU08RA□□	—	200

#### ● TL Type

Type	Minimum Quantity (pcs.)
	Box
TLH10UA□	500
TLH10UB	
TLF10UAH	
TLF9UA□	
TLF9UB□	
TLF14CB□	
TLF24HB□	

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

1. Operating Temperature Range														
CM-RA/BU-RA Type	-25~+105°C													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] Including temperature rise due to self-generated heat.														
2. Storage temperature range														
CM-RA/BU-RA Type	-40~+85°C													
CM-RB Type														
TLH, TLF Type														
3. Rated current														
CM-RA/BU-RA Type	Within the specified range													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] CM: The maximum value of DC current within a specified rise of temperature individually. TLH10U, TLF10UAH: The maximum value of AC current within the temperature rise of 60°C TLF9UA, 14CB: The maximum value of AC current within the temperature rise of 45°C TLF9UB: The maximum value of DC current within the temperature rise of 45°C														
4. Inductance														
CM-RA/BU-RA Type	Within the specified tolerance													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] CM : Measuring equipment : 4263A (HP) or its equivalent Measuring frequency : 1kHz  TLF9U : Measuring equipment : Impedance analyzer (HP4192A) or its equivalent Measuring frequency : 1kHz Measuring voltage : 0.35Vosc  TLH, TLF (except TLF9U) : Measuring equipment : LCR meter 4284A or its equivalent Measuring frequency : 1kHz Measuring voltage : 1.0V														
5. DC resistance														
CM-RA/BU-RA Type	Within the specified tolerance													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] CM, TLH, TLF : Measuring equipment : DC ohmmeter														
6. Terminal strength tensile force														
CM-RA/BU-RA Type	No abnormality													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] CM : Fix the component in the direction to draw terminal and gradually apply tensile force as detailed in individual specifications.  TLF9U : Apply the stated tensile force gradually in the direction to draw terminal.      TLH, TLF (except TLF9U): Apply the stated tensile force gradually in the direction to draw terminal.														
<table border="1"> <thead> <tr> <th>Nominal wire diameter tensile φd [mm]</th> <th>force [N]</th> <th>duration [s]</th> <th>Nominal wire diameter tensile φd [mm]</th> <th>force [N]</th> <th>duration [s]</th> </tr> </thead> <tbody> <tr> <td>φ0.6</td> <td>5</td> <td>30±5</td> <td>φ0.8</td> <td>10</td> <td>30±5</td> </tr> </tbody> </table>			Nominal wire diameter tensile φd [mm]	force [N]	duration [s]	Nominal wire diameter tensile φd [mm]	force [N]	duration [s]	φ0.6	5	30±5	φ0.8	10	30±5
Nominal wire diameter tensile φd [mm]	force [N]	duration [s]	Nominal wire diameter tensile φd [mm]	force [N]	duration [s]									
φ0.6	5	30±5	φ0.8	10	30±5									
7. Insulation resistance between wires														
CM-RA/BU-RA Type	100MΩ min.													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] CM, TLH, TLF : Applied voltage : Rated voltage (CM-RA/BU-RA, CM-RB) : 500VDC (TLH, TLF (except TLF9UB)) : 250VDC (TLF9UB) Duration : 60sec.														
8. Insulation resistance between wire and core														
CM-RA/BU-RA Type	100MΩ min. (except TLH, TLF10UAH Type)													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] TLF : Applied voltage : 500VDC (TLF (except TLF9UB)) : 250VDC (TLF9UB) Duration : 60 sec.														
9. Withstanding : between wires														
CM-RA/BU-RA Type	No abnormality													
CM-RB Type														
TLH, TLF Type														
[Test method and remarks] CM, TLH, TLF : Applied voltage : 250VDC (CM-RA/BU-RA, CM-RB) : 2000VAC (TLH, TLF (except TLF9UB)) : 500VDC (TLF9UB) Duration : 60sec.														

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

10. Withstanding : between wires and core		
CM-RA/BU-RA Type		
CM-RB Type		
TLH, TLF Type	No abnormality (except TLH, TLF10UAH Type)	
【Test method and remarks】		
TLF	: Applied voltage : 2000VAC (TLF (except TLF9UB)) : 500VDC (TLF9UB)	
Duration	: 60sec.	
11. Rated voltage		
CM-RA/BU-RA Type		
CM-RB Type	Within the specified range	
TLH, TLF Type		
【Test method and remarks】		
TLH, TLF (except TLF9UB)	: 250VAC	
TLF9UB	: 50VDC	
12. Resistance to vibration		
CM-RA/BU-RA Type		
CM-RB Type	Appearance : No abnormality	Inductance change : Within $\pm 15\%$
TLH, TLF Type	TLF9U : Inductance change : Within $\pm 5\%$	TLH, TLF (except TLF9U) : Within the specified range
【Test method and remarks】		
CM, TLH, TLF : According to JIS C 0040		
Direction : 2hrs each in X, Y and Z direction Total : 6hrs		
Frequency range : 10 to 55 to 10Hz (1 min.)		
Amplitude : 1.5mm (shall not exceed acceleration 196m/s <sup>2</sup> )		
Mounting method : soldering onto PC board		
Recovery : 2 to 24 hrs of recovery under the standard condition after the test. (CM-RB)		
: At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs. (TLH, TLF)		
13. Solderability		
CM-RA/BU-RA Type	At least 75% of terminal electrode is covered by new solder.	
CM-RB Type		
TLH, TLF Type	Solder shall be uniformly adhered onto immersed surfaces.	
【Test method and remarks】		
CM	: Solder temperature : 235 $\pm$ 5 $^{\circ}$ C Duration : 2 $\pm$ 0.5sec. Immersion depth : According to detailed specification.	
TLH, TLF	: Solder temperature : 245 $\pm$ 5 $^{\circ}$ C Duration : 4 $\pm$ 1sec. Immersion depth : Up to 1.0 to 1.5mm from PBC mounted level.	
14. Resistance to soldering heat		
CM-RA/BU-RA Type	Appearance : No abnormality	Inductance change : Refer to individual specification
CM-RB Type		
TLH, TLF Type	TLF9UA : Inductance change : Within $\pm 5\%$	TLF14CB : Within the specified range
【Test method and remarks】		
CM	: Solder temperature : 260 $\pm$ 5 $^{\circ}$ C Duration : 5 $\pm$ 0.5sec. Immersion depth : Up to 2~2.5mm from terminal root. Recovery : 1 to 2 hrs of recovery under the standard condition after the test.	
TLH, TLF	: Solder temperature : 260 $\pm$ 5 $^{\circ}$ C Duration : 10 $\pm$ 1sec. Immersion depth : Up to 1.0 to 1.5mm from PBC mounted level. Recovery : At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.	
15. Thermal shock		
CM-RA/BU-RA Type	Appearance : No abnormality	Inductance change : Refer to individual specification
CM-RB Type		
TLH, TLF Type	TLF9UA : Inductance change : Within $\pm 15\%$	TLH, TLF (except TLF9UA) : Withstanding voltage : No abnormality Insulation resistance : No abnormality
【Test method and remarks】		
CM, TLH, TLF : According to JIS C 0025		
Conditions for 1 cycle		
Step	Temperature ( $^{\circ}$ C)	Duration (min)
1	-25 $\pm$ 3	30 $\pm$ 3
2	Room Temperature	Within 3
3	+85 $\pm$ 2	30 $\pm$ 3
4	Room Temperature	Within 3
Number of cycles : 10		
Recovery : At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2 hrs.		
16. Damp heat		
CM-RA/BU-RA Type		
CM-RB Type		
TLH, TLF Type	TLF9UA : Inductance change : Within $\pm 15\%$	TLH, TLF (except TLF9UA) : Withstanding voltage : No abnormality Insulation resistance : No abnormality
【Test method and remarks】		
TLH, TLF	: Temperature : 60 $\pm$ 2 $^{\circ}$ C 40 $\pm$ 2 $^{\circ}$ C (※TLF14CB)	
Humidity	: 90~95%RH	
Duration	: 500 hrs	
Recovery	: At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.	

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## RELIABILITY DATA

17. Loading under damp heat						
CM-RA/BU-RA Type	Appearance : No abnormality	Inductance change : Refer to individual specification				
CM-RB Type						
TLH, TLF Type	Withstanding voltage : No abnormality	Insulation resistance : No abnormality				
[Test method and remarks]						
CM	Temperature : 40±2°C Humidity : 90~95%RH Duration : 500 (+12, -0) hrs Applied current : Rated current Recovery : 1 to 2hrs of recovery under the standard condition after the removal from test chamber.					
TLH, TLF	Temperature : 60±2°C : 40±2°C (※TLF14CB) Humidity : 90~95%RH Duration : 100 hrs : 500 hrs Apply rated current across windings (※TLF14CB) Applied voltage : Apply the following specified voltage between windings. <table border="1" style="margin-left: 20px;"> <tr> <td>TLF9UA</td> <td>250VAC</td> </tr> <tr> <td>TLF9UB</td> <td>50VDC</td> </tr> </table> Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.		TLF9UA	250VAC	TLF9UB	50VDC
TLF9UA	250VAC					
TLF9UB	50VDC					
18. Low temperature life test						
CM-RA/BU-RA Type	Appearance : No abnormality	Inductance change : Refer to individual specification				
CM-RB Type						
TLH, TLF Type	TLF9U : Inductance change : Within ±15%	Insulation resistance : No abnormality				
	TLH, TLF (except TLF9U) : Withstanding voltage : No abnormality					
[Test method and remarks]						
CM	Temperature : -40±3°C Duration : 500 (+12, -0) hrs Recovery : 1 to 2hrs of recovery under the standard condition after the removal from test chamber.					
TLH, TLF	Temperature : -25±2°C : -40±2°C (※TLF14CB) Duration : 500 hrs Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.					
19. High Temperature life test						
CM-RA/BU-RA Type	Appearance : No abnormality	Inductance change : Refer to individual specification				
CM-RB Type						
TLH, TLF Type	TLF9U : Inductance change : Within ±15%	Insulation resistance : No abnormality				
	TLH, TLF (except TLF9U) : Withstanding voltage : No abnormality					
[Test method and remarks]						
CM	Temperature : 85±2°C Duration : 500 (+12, -0) hrs Recovery : 1 to 2hrs of recovery under the standard condition after the removal from test chamber.					
TLH, TLF	Temperature : 85±2°C : 105±3°C (※TLF14CB) Duration : 500 hrs Recovery : At least 1hr of recovery under the standard removal from test chamber followed by the measurement within 2 hrs.					

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.

## PRECAUTIONS

CM-RA Type, CM-RB Type, TLH, TLF Type

1. Circuit Design	
Precautions	<ul style="list-style-type: none"> <li>◆ Operating environment               <ol style="list-style-type: none"> <li>1. The products described in this specification are intended for use in general electronic equipment, (office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance.</li> </ol> </li> </ul>
2. PCB Design	
Precautions	<ul style="list-style-type: none"> <li>◆ Design               <ol style="list-style-type: none"> <li>1. Please design insertion pitches as matching to that of leads of the component on PCBs.</li> </ol> </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Design               <ol style="list-style-type: none"> <li>1. When Inductors are mounted onto a PC board, hole dimensions on the board should match the lead pitch of the component, if not, it will cause breakage of the terminals or cracking of terminal roots covered with resin as excess stress travels through the terminal legs.</li> </ol> </li> </ul>
3. Soldering	
Precautions	<ul style="list-style-type: none"> <li>◆ Wave soldering               <ol style="list-style-type: none"> <li>1. Please refer to the specifications in the catalog for a wave soldering.</li> <li>2. Do not immerse the entire inductor in the flux during the soldering operation.</li> </ol> </li> <li>◆ Lead free soldering               <ol style="list-style-type: none"> <li>1. When using products with lead free soldering, we request to use them after confirming of adhesion, temperature of resistance to soldering heat, etc. sufficiently.</li> </ol> </li> <li>◆ Recommended conditions for using a soldering iron               <ul style="list-style-type: none"> <li>• Put the soldering iron on the land-pattern.</li> <li>• Soldering iron's temperature - Below 350°C</li> <li>• Duration - 3 seconds or less</li> <li>• The soldering iron should not directly touch the product.</li> </ul> </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Lead free soldering               <ol style="list-style-type: none"> <li>1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ol> </li> </ul>
4. Cleaning	
Precautions	<ul style="list-style-type: none"> <li>◆ Cleaning conditions               <ol style="list-style-type: none"> <li>1. TLF type</li> </ol>               Please contact any of our offices for about a cleaning.             </li> </ul>
5. Handling	
Precautions	<ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. Keep the product away from all magnets and magnetic objects.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. Please do not give the product any excessive mechanical shocks.</li> <li>2. TLF type</li> </ol>               Please do not add any shock or power to a product in transportation.             </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. Please do not give the product any excessive mechanical shocks.</li> </ol>               In loading, please pay attention to handling indication mentioned in a packing box (a loading direction / number of maximum loading / fragile item).             </li> </ul>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. There is a case that a characteristic varies with magnetic influence.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. There is a case to be damaged by a mechanical shock.</li> <li>2. TLF type</li> </ol>               There is a case to be broken by a fall.             </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. There is a case that a lead route turns at by a fall or an excessive shock.</li> </ol> </li> </ul>
6. Storage conditions	
Precautions	<ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.                   <ul style="list-style-type: none"> <li>• Recommended conditions</li> <li>Ambient temperature: 0~40°C</li> <li>Humidity : Below 70% RH</li> </ul> </li> </ol>               The ambient temperature must be kept below 30°C. Even under ideal storage conditions, the solderability of electrodes decreases gradually, so the products should be mounted within one year from the time of delivery.             </li> </ul> <p style="margin-left: 20px;">In case of storage over 6 months, solderability shall be checked before actual usage.</p>
Technical considerations	<ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.</li> </ol> </li> </ul>

\* This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>) or CD catalogs.