



REV. Status	TCA NO.	MODEL NO.	RATED CURRENT (AC)	INDUCTANCE (uH) MIN	DCR (mohm MAX)	OD	HT
REVISION - 04/08/98 TS	P-A4-12018-01	SKP4-40	5	40	30	26.0(1.02)	12.0(0.47)
REVISION A CHG'D CURRENT WAS DC 04/27/98 TS	P-A4-12018-02	SKP4-50	5	62	35	26.0(1.02)	12.0(0.47)
	P-A4-12018-03	SKP5-40	5	100	40	28.0(1.10)	15.0(0.59)
	P-A4-12018-04	SKP5-50	5	150	50	28.0(1.10)	15.0(0.59)

Schematic Diagram;





Country of origin

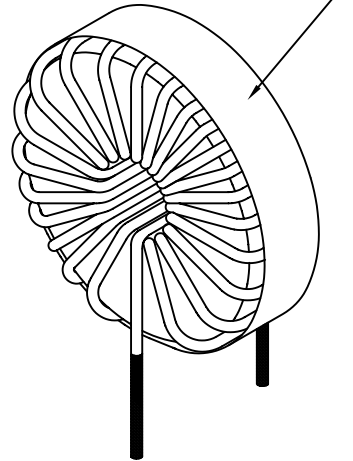

SKP3-30~SKP3-50

Mechanical Specifications;

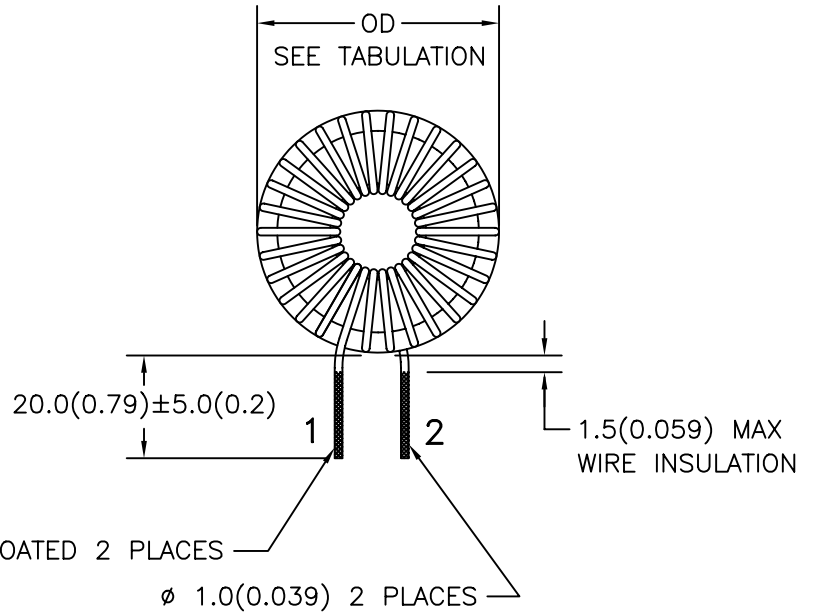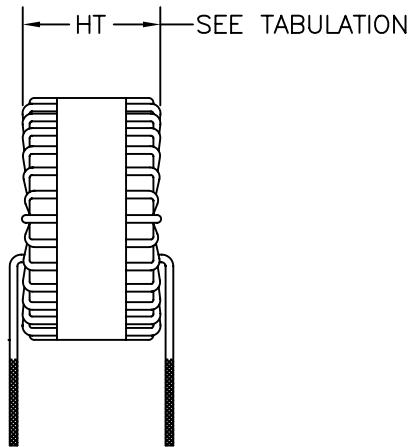

SOLDER COATED 2 PLACES

ø 1.0(0.039) 2 PLACES

TOLERANCES (mm)

≤ 4	± 0.2
4 ≤ 20	± 0.3
20 ≤ 50	± 0.4

NOTE: Inductance is measured at 1 KHz, 1mA AC current

PREPARED BY:

D. Kelley

ENGINEER:

T. Shiozawa

DWG CONTROL NO. P-A4-12019
ACAD\MISCX\A4120191.DWG

REV

A

POWER INDUCTOR FOR SWITCH MODE POWER SUPPLIES

SKP4-40~5-50

QUALITY CONTROL:

D. Kelley

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA

43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

APPROVED:

D. Suzuki

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.