

REV. Status

REVISION - 04/02/98 TS
REVISION A ADDED RoHS 11/21/05 YS





A. Electrical Specifications (@ 20 ° C)


1. Inductance; 0.1H MIN @ 300Hz 3VAC DC 5mA
2. DC Current; 5mA MAX
3. Q; 2.0 MIN @ 1KHz, 1VAC DC0mA
4. DC Resistance; 15Ω ±20%
5. HiPot; 500VAC 1 minute winding to case

B. Marking; MEI-05, TAMURA, inductance, date code and country of origin

C. Schematic Diagram

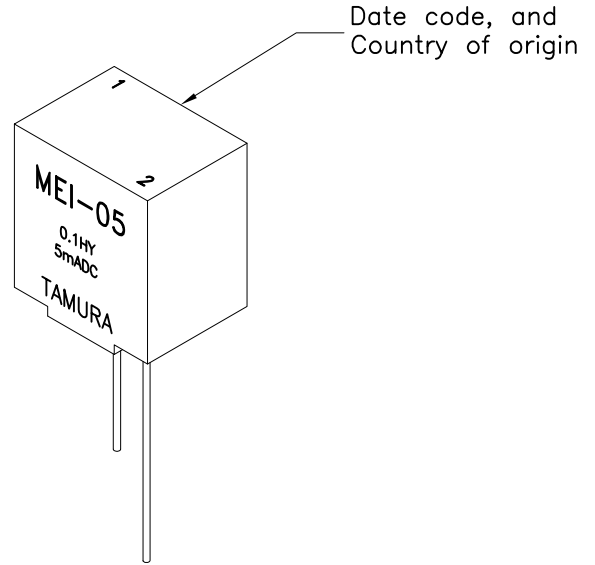

D. Mechanical Specifications

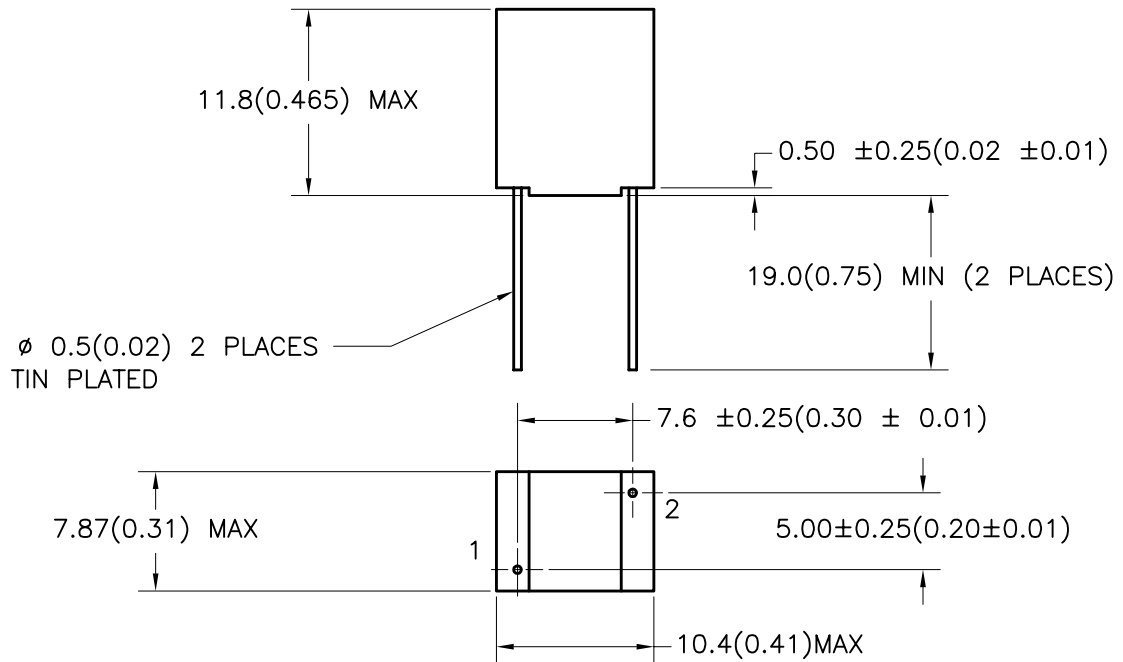

PREPARED BY:

K. BRENNAN

ENGINEER:

M. PITCHAI

QUALITY CONTROL:

T. CLEM

APPROVED:

Y. SEKIGUCHI

DWG CONTROL NO. P-A4-11997 ACAD\MXFMR\A4119971.DWG	REV A
--	----------

MINIATURE ENCAPSULATED INDUCTOR

MEI-05

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

MODEL SPECIFICATION	DIM: mm(In)	SCL: 2/1	SH: 1 OF 1
---------------------	-------------	----------	------------

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.