


**Interference Suppression Film Capacitors  
MKP Radial Potted Type**

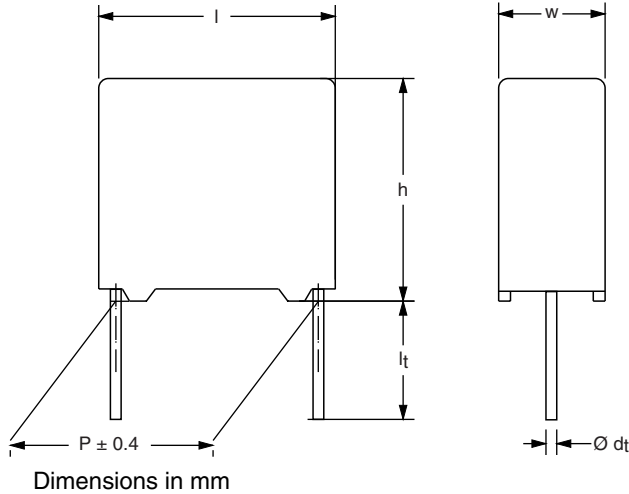

**NO FOCUS PRODUCT: USE MKP 3381 X1**

**APPLICATIONS**

X1 class

For X1 electromagnetic interference suppression in across the line applications (50/60 Hz) with a maximum mains voltage of 275 V(AC)

For application limitations please refer to section "Application notes"

**REFERENCE STANDARDS**

"IEC 60384-14 2nd edition and EN 132400"

"IEC 60065, pass. flamm. class B"

250 V: CSA-C22.2 No 1; UL1414

275 V: UL1283; ENEC

**MARKING**

C-value; tolerance; rated voltage; sub-class; manufacturer's type designation; code for dielectric material, only for pitch  $\geq 15$  mm; manufacturer location; year and week

**DIELECTRIC**

Polypropylene film

**ELECTRODES**

Metallized film

**CONSTRUCTION**

Mono construction

**FEATURES**

15 to 27.5 mm lead pitch. Supplied loose in box, taped on reel

Lead (Pb)-free product

RoHS-compliant product



**RoHS  
COMPLIANT**

**RATED VOLTAGE**

AC 275 V; 50 to 60 Hz

**PERMISSIBLE DC VOLTAGE**

DC 630 V

**ENCAPSULATION**

Plastic case, epoxy resin sealed, flame retardant  
UL-class 94 V-0

**CLIMATIC TESTING CLASS ACC. TO EN 60068-1**

55/105/56/B

**CAPACITANCE RANGE (E12 SERIES)**

E12 series 0.01 to 1  $\mu$ F

Preferred values acc. to E6

**CAPACITANCE TOLERANCE**

$\pm 20$  %;  $\pm 10$  %;  $\pm 5$  %

**LEADS**

Tinned wire

**RATED TEMPERATURE**

105 °C

**MAXIMUM APPLICATION TEMPERATURE**

105 °C


**DETAIL SPECIFICATION**

For more detailed data and test requirements contact:

[rfi@vishay.com](mailto:rfi@vishay.com)



COMPOSITION OF CATALOG NUMBER

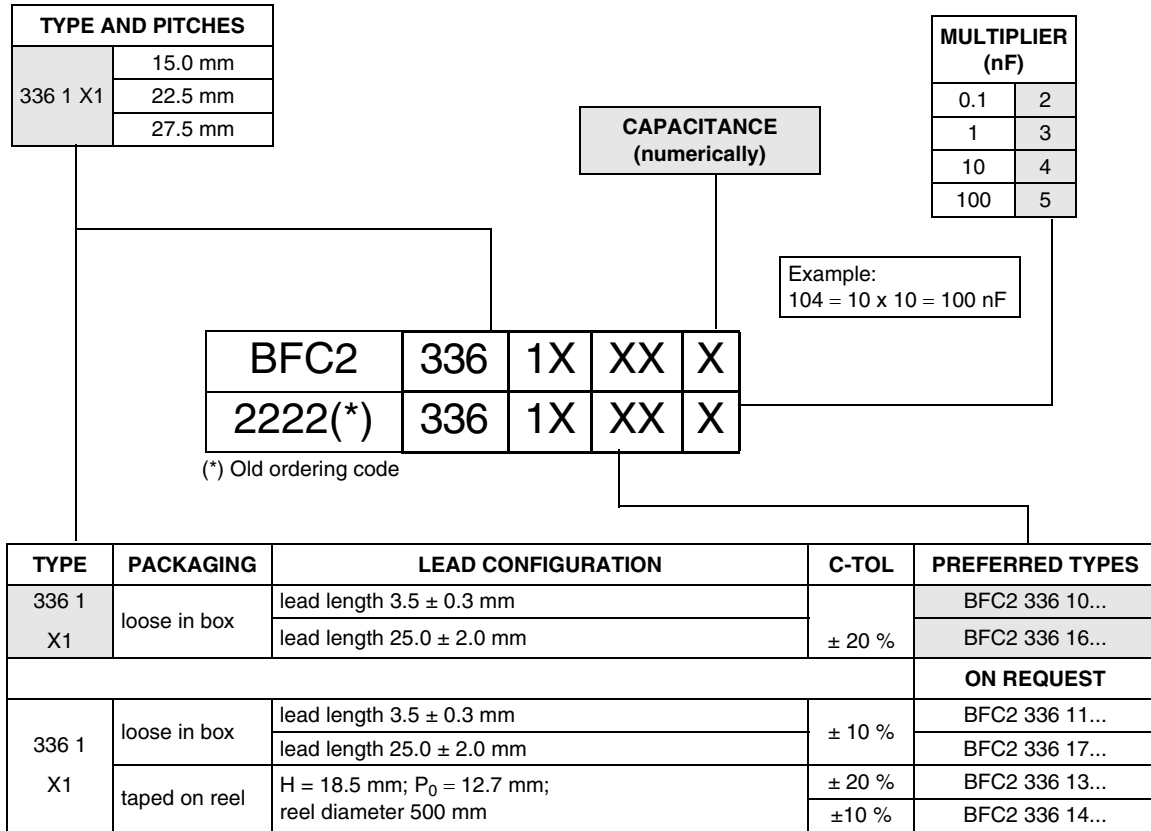

**Note**

(1) For detailed tape specifications refer to Packaging information [www.vishay.com/docs/28139/packinfo.pdf](http://www.vishay.com/docs/28139/packinfo.pdf)

**SPECIFIC REFERENCE DATA MKP 336 1 275 VAC**

DESCRIPTION	VALUE
Tangent of loss angle:	at 10 kHz
C ≤ 100 nF	≤ 10 x 10 <sup>-4</sup>
100 nF < C ≤ 470 nF	≤ 20 x 10 <sup>-4</sup>
C > 470 nF	≤ 70 x 10 <sup>-4</sup>
Rated voltage pulse slope (dU/dt) <sub>R</sub> at 385 V (DC):	
P = 15 mm	250 V/μs
P = 22.5 mm	150 V/μs
P = 27.5 mm	100 V/μs
R between leads, for C ≤ 0.33 μF at 100 V; 1 min	> 15 000 MΩ
RC between leads, for C > 0.33 μF at 100 V; 1 min	> 5000 s
R between leads and case; 100 V; 1 min	> 30 000 MΩ
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	3400 V; 1 min
Withstanding (AC) voltage between leads and case	2050 V; 1 min

## MKP 336 1 GENERAL DATA

$U_{Rac} = 275 \text{ V}$ ;  $C\text{-tol} = \pm 20 \%$

C ( $\mu\text{F}$ )	DIMENSIONS W x H x L (mm)	MASS (g <sup>(1)</sup> )	CATALOG NUMBER BFC2 336 1 ..... AND PACKAGING					
			LOOSE IN BOX				REEL	
			$l_t = 3.5 \pm 0.3$		$l_t = 25.0 \pm 2.0 \text{ mm}$		$H = 18.5 \text{ mm}$ ; $P_0 = 12.7 \text{ mm}$	
			Last 5 digits of catalog number	SPQ	Last 5 digits of catalog number	SPQ	Last 5 digits of catalog number	SPQ
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.6 \pm 0.06 \text{ mm}</math></b>								
0.01	5.0 x 11.0 x 17.5	1	19001	1000	19007	1000	19002	1100
0.015			10153		16153		13153	
0.022			10223		16223		13223	
0.033	6.0 x 12.0 x 17.5	1.4	10333		16333		13333	900
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.8 \pm 0.08 \text{ mm}</math></b>								
0.047	7.0 x 13.5 x 17.5	1.8	10473	1000	16473	500	13473	800
0.068	8.5 x 15.0 x 17.5	2.4	10683		16683		13683	650
0.1	10.0 x 16.5 x 17.5	3	10104	500	16104		13104	600
<b>Pitch = <math>22.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.8 \pm 0.08 \text{ mm}</math></b>								
0.1	7.0 x 16.5 x 26.0	2.9	19003	200	19008	500	19004	550
0.15	8.5 x 18.0 x 26.0	3.8	10154		16154		13154	450
0.22	10.0 x 19.5 x 26.0	6.8	10224		16224		13224	400
<b>Pitch = <math>27.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.8 \pm 0.08 \text{ mm}</math></b>								
0.22	11.0 x 21.0 x 31.0	7.4	19005	100	19009	125		
0.33	13.0 x 23.0 x 31.0	9.2	10334		16334			
0.47	15.0 x 25.0 x 31.0	12.3	10474		16474			
0.68	18.0 x 28.0 x 31.0	16.1	10684		16684			
1	21.0 x 31.0 x 31.0	20.3	10105	50	16105	75		

### Notes

1. Weight for short lead product only



Interference Suppression Film Capacitors




Vishay BCcomponents

U<sub>RAC</sub> = 275 V; C-TOL = ± 10 %

C (µF)	DIMENSIONS W x H x L (mm)	MASS (g) <sup>(1)</sup>	CATALOG NUMBER BFC2 336 1..... AND PACKAGING					
			LOOSE IN BOX				REEL	
			It = 3.5 ± 0.3 m		It = 25.0 ± 2.0 mm		H = 18.5 mm; P <sub>0</sub> = 12.7 mm	
			last 5 digits	SPQ	last 5 digits	SPQ	last 5 digits	SPQ
<b>Pitch = 15.0 ± 0.4 mm; d<sub>t</sub> = 0.6 ± 0.06 mm</b>								
0.01	5.0 x 11.0 x 17.5	1	11103	1000	17103	1000	14103	1100
0.012			11123		17123		14123	
0.015			11153		17153		14153	
0.018			11183		17183		14183	
0.022	6.0 x 12.0 x 17.5	1.4	11223	1000	17223	1000	14223	900
0.027			11273		17273		14273	
<b>Pitch = 15.0 ± 0.4 mm; dt = 0.8 ± 0.08 mm</b>								
0.033	7.0 x 13.5 x 17.5	1.8	11333	1000	17333	500	14333	800
0.039			11393		17393		14393	
0.047	8.5 x 15.0 x 17.5	2.4	11473		17473		14473	650
0.056			11563		17563		14563	
0.068	10.0 x 16.5 x 17.5	3	11683	500	17683	1000	14683	600
0.082			11823		17823		14823	
<b>Pitch = 22.5 ± 0.4 mm; dt = 0.8 ± 0.08 mm</b>								
0.1	7.0 x 16.5 x 26.0	2.9	11104	200	17104	500	14104	550
0.12	8.5 x 18.0 x 26.0	3.8	11124		17124	250	14124	450
0.15			11154		17154	14154		
0.18	10.0 x 19.5 x 26.0	6.8	11184		17184	500	14184	400
<b>Pitch = 27.5 ± 0.4 mm; dt = 0.8 ± 0.08 m</b>								
0.22	11.0 x 21.0 x 31.0	7.4	11224	100	17224	125	1000	1000
0.27			11274		17274			
0.33	13.0 x 23.0 x 31.0	9.2	11334		17334			
0.39	15.0 x 25.0 x 31.0	12.3	11394		17394			
0.47			11474		17474			
0.56	18.0 x 28.0 x 31.0	16.1	11564		17564			
0.68			11684	17684				
0.82	21.0 x 31.0 x 31.0	20.3	11824	50	17824	75	1000	

Note

- Weight for short lead product only

SAFETY APPROVALS X1	VOLTAGE	VALUE	FILE NUMBERS
EN132400	275 V (AC)	10 nF to 1 μF	FI 2006020
UL1414	250 V (AC)	10 nF to 1 μF	E112471
UL1283	275V (AC)	10 nF to 1 μF	E109565
CSA-C22.2 No.1	250 V (AC)	10 nF to 1 μF	1104860
The EneC-approval together with the CB-Certificate replace all national marks of the following countries (they have already signed the ENEC-Agreement): Austria; Belgium; Czech. Republic; Denmark; Finland; France; Germany; Greece; Hungary; Ireland; Italy; Luxembourg; Netherlands; Norway; Portugal; Slovenian; Spain; Switzerland and United Kingdom.			
  			

## MOUNTING

### Normal Use

The capacitors are designed for mounting on printed-circuit boards. The capacitors packed in bandoliers are designed for mounting in printed-circuit boards by means of automatic insertion machines.

For detailed tape specifications refer to "Packaging information".

### Specific Method of Mounting to Withstand Vibration and Shock


In order to withstand vibration and shock tests, it must be ensured that the stand-off pips are in good contact with the printed-circuit board:

- For pitches  $\leq 15$  mm capacitors shall be mechanically fixed by the leads
- For longer pitches the capacitors shall be mounted in the same way and the body clamped

### Space Requirements on printed Circuit Board

The maximum length and width of film capacitors is shown in Figure:

- Eccentricity as in figure. The maximum eccentricity is smaller than or equal to the lead diameter of the product concerned
- Product height with seating plane as given by "IEC 60717" as reference:  $h_{max} \leq h + 0.3$  mm

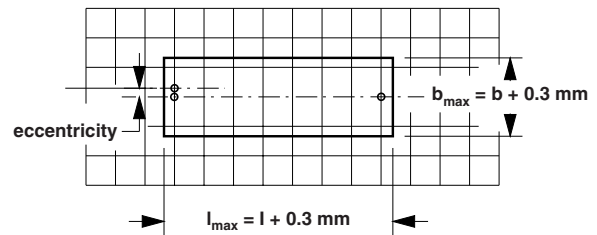

CBA116

### Storage Temperature

- Storage temperature:  $T_{stg} = 25$  to  $+ 40$  °C with RH maximum 80 % without condensation

### Ratings and Characteristics Reference Conditions


Unless otherwise specified, all electrical values apply to an ambient temperature of  $23 \pm 1$  °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of  $50 \pm 2$  %.

For reference testing, a conditioning period shall be applied over  $96 \pm 4$  hours by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20 %.




CHARACTERISTICS


Capacitance

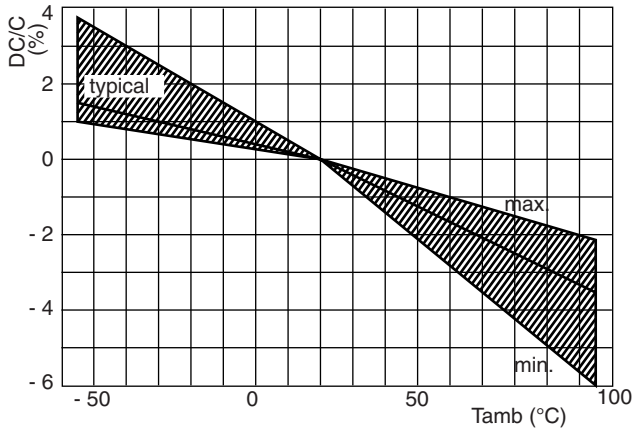


Tangent of loss angle

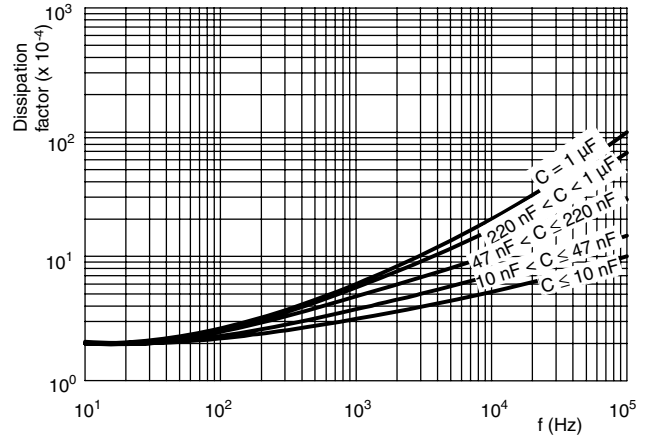



Impedance

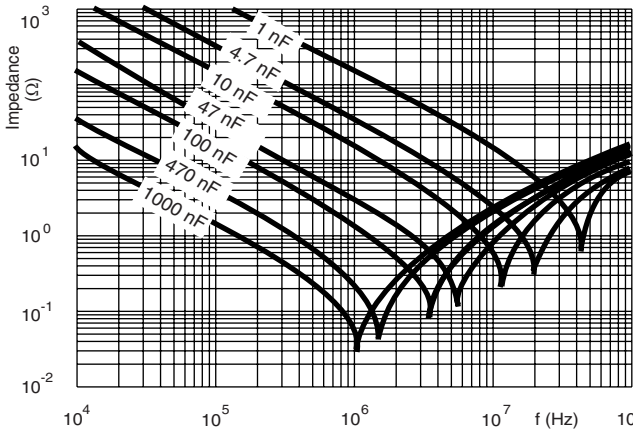

Resonant frequency

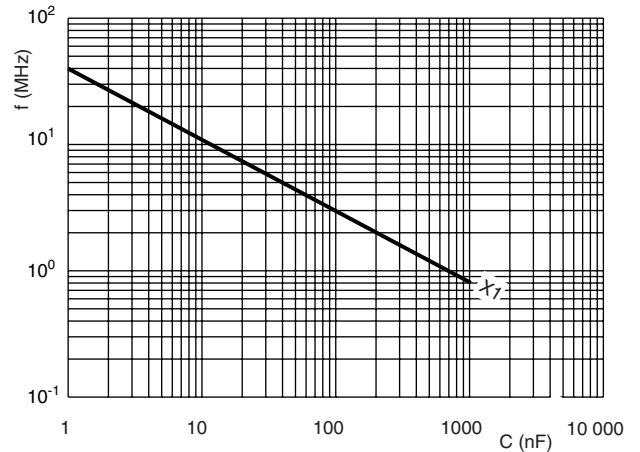


Max RMS voltage and AC current (sinewave)

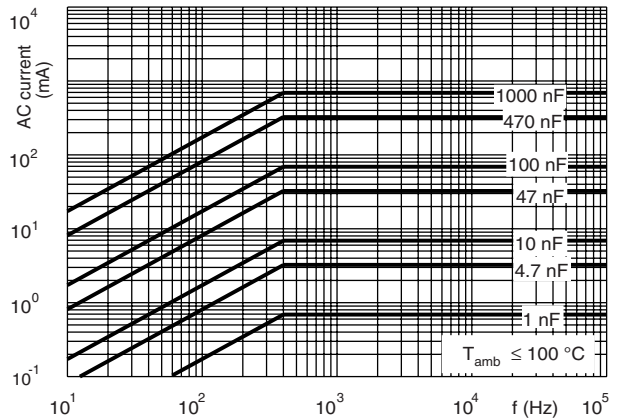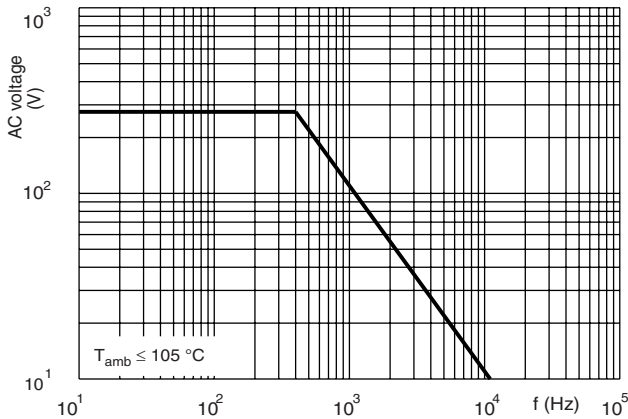



**CHARACTERISTICS**

**Capacitance**

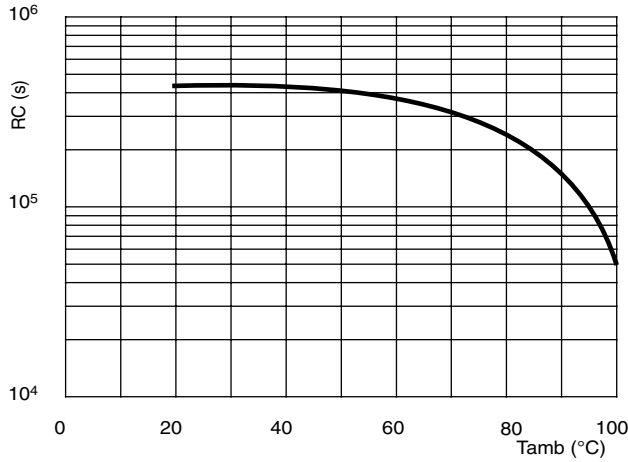

**APPLICATION NOTES**

- For X1 electromagnetic interference suppression in **across the line applications** (50/60 Hz) with a maximum mains voltage of 275 V (AC).
- These capacitors are not intended for continuous pulse applications. For these situations, capacitors of the AC and pulse programs must be used.
- These capacitors are not intended for series impedance application. For these situations in case safety approvals are requested, please refer to our special capacitors of 1772 series with internal series connection.
- The maximum ambient temperature must not exceed 105 °C.
- Rated voltage pulse slope:  
If the pulse voltage is lower than the rated voltage, the values of the specific reference data can be multiplied by 385 V (DC) and divided by the applied voltage.



Interference Suppression Film Capacitors Vishay BCcomponents  
MKP Radial Potted Type

**INSPECTION REQUIREMENTS**

**General Notes:**

1. Sub-clause numbers of tests and performance requirements refer to the “Sectional Specification, IEC-publication EN 132400 (IEC 60384-14) and section One of this specification”.
2. In this table: D = destructive  
ND = non destructive

**Group C inspection requirements**

SUB - CLAUSE NUMBER AND TEST	D OR ND	CONDITIONS	PERFORMANCE REQUIREMENTS
<b>SUB-GROUP C1A PART OF SAMPLE OF SUB-GROUP C1</b>	D		
4.1 Dimensions (detail)			As specified in Chapters “General data” of this specification
Initial measurements		Capacitance Tangent of loss angle: For C ≤ 470 nF at 100 kHz For C > 470 nF at 10 kHz	
4.3 Robustness of terminations		Tensile: load 10 N; 10 s Bending: load 5 N; 4 x 90°	No visible damage
4.4 Resistance to soldering heat		No pre-drying Method: 1A Solder bath: 260 °C Duration: 10 s	
4.19 Component solvent resistance		Isopropylalcohol at room temperature Method: 2 Immersion time: 5 ± 0.5 min Recovery time: Min. 1 hour, max. 2 hours	
4.4.2 Final measurements		Visual examination	No visible damage Legible marking
		Capacitance	$ \Delta C/C  \leq 5\%$ of the value measured initially
		Tangent of loss angle	Increase of tan $\delta$ : ≤ 0.0100 for: C ≤ 100 nF or ≤ 0.0200 for: 100 nF < C ≤ 470 nF or ≤ 0.0080 for: C > 470 nF Compared to values measured initially
		Insulation resistance	As specified in Section “Insulation Resistance” of this specification





Interference Suppression Film Capacitors Vishay BCcomponents  
MKP Radial Potted Type

SUB - CLAUSE NUMBER AND TEST	D OR ND	CONDITIONS	PERFORMANCE REQUIREMENTS
<b>SUB - GROUP C1B PART OF SAMPLE OF SUB - GROUP C1</b>	D		
<p>Initial measurements</p> <p>4.20 Solvent resistance of the marking: see Section "General notes"; item 5</p> <p>4.6 Rapid change of temperature</p> <p>4.6.1 Inspection</p> <p>4.7 Vibration (see note 3.1)</p> <p>4.7.2 Final inspection</p> <p>4.9 Shock (see note 3)</p> <p>4.9.2 Final measurements</p>		<p>Capacitance Tangent of loss angle: For <math>C \leq 470</math> nF at 100 kHz For <math>C &gt; 470</math> nF at 10 kHz</p> <p>Isopropylalcohol at room temperature Method: 1 Rubbing material: cotton wool Immersion time: <math>5 \pm 0.5</math> min</p> <p><math>\theta A = - 55</math> °C <math>\theta B = + 105</math> °C 5 cycles</p> <p>Duration <math>t = 30</math> min</p> <p>Visual examination Mounting: see Section "Mounting" of this specification Procedure B4: Frequency range: 10 to 55 Hz Amplitude: 0.75 mm or Acceleration 98 m/s<sup>2</sup> (whichever is less severe) Total duration 6 hours</p> <p>Visual examination</p> <p>Mounting: see Section "Mounting" for more information Pulse shape: half sine Acceleration: 490 m/s<sup>2</sup> Duration of pulse: 11 ms</p> <p>Visual examination</p> <p>Capacitance</p> <p>Tangent of loss angle</p> <p>Insulation resistance</p>	<p>No visible damage Legible marking</p> <p>No visible damage</p> <p>No visible damage</p> <p>No visible damage</p> <p>No visible damage</p> <p>No visible damage</p> <p>No visible damage</p> <p><math> \Delta C/C  \leq 5</math> % of the value measured initially</p> <p>Increase of <math>\tan \delta</math>: <math>\leq 0.0100</math> for: <math>C \leq 100</math> nF or <math>\leq 0.0200</math> for: <math>100</math> nF <math>&lt; C \leq 470</math> nF or <math>\leq 0.0080</math> for: <math>C &gt; 470</math> nF Compared to values measured initially</p> <p>As specified in Section "Insulation Resistance" of this specification</p>



Interference Suppression Film Capacitors Vishay BCcomponents  
MKP Radial Potted Type


SUB - CLAUSE NUMBER AND TEST	D OR ND	CONDITIONS	PERFORMANCE REQUIREMENTS
<b>SUB - GROUP C1 COMBINED SAMPLE OF SPECIMENS OF SUB - GROUPS C1A AND C1B</b>	D		
4.11 Climatic sequence 4.11.1 Initial measurements  4.11.2 Dry heat  4.11.3 Damp heat cyclic Test Db  4.11.4 Cold  4.11.5 Damp heat cyclic Test Db  4.11.6 Final measurements		Capacitance Measured in 4.4.2 and 4.9.2 Tangent of loss angle: Measured initially in C1A and C1B  Temperature: 105 °C Duration: 16 hours   Temperature: - 55 °C Duration: 2 hours   Visual examination   Capacitance   Tangent of loss angle   Voltage proof 1200 V (DC); 1 min between term. Insulation resistance	No visible damage Legible marking  $ \Delta C/C  \leq 5\%$ of the value measured in 4.11.1.  Increase of $\tan \delta$ : $\leq 0.0100$ for: $C \leq 100$ nF or $\leq 0.0200$ for: $100$ nF < $C \leq 470$ nF or $\leq 0.0080$ for: $C > 470$ nF Compared to values measured in 4.11.1 No permanent breakdown or flash-over  $\geq 50\%$ of values specified in Section "Insulation resistance" of this specification
<b>SUB - GROUP C2</b>	D		
4.12 Damp heat steady state  4.12.1 Initial measurements  4.12.3 Final measurements		56 days, 40 °C, 90 to 95 % RH, no load Capacitance  Tangent of loss angle at 10 kHz   Visual examination   Capacitance   Tangent of loss angle   Voltage proof 1200 V (DC); 1 min between term. Insulation resistance	No visible damage Legible marking  $ \Delta C/C  \leq 5\%$ of the value measured in 4.12.1.  Increase of $\tan \delta$ : $\leq 0.0080$ Compared to values measured in 4.12.1. No permanent breakdown or flash-over  $\geq 50\%$ of values specified in Section "Insulation resistance" of this specification



Interference Suppression Film Capacitors Vishay BCcomponents  
MKP Radial Potted Type

SUB - CLAUSE NUMBER AND TEST	D OR ND	CONDITIONS	PERFORMANCE REQUIREMENTS
<b>SUB GROUP C3</b>	D		
4.13.1 Initial measurements  4.13 Impulse voltage  4.14 Endurance  4.14.7 Final measurements		Capacitance Tangent of loss angle: For C ≤ 470 nF at 100 kHz For C > 470 nF at 10 kHz 3 successive impulses, full wave, peak voltage: X1: 4 kV Max. 24 pulses Duration: 1000 hours 1.25 U <sub>Rac</sub> at 105 °C Once in every hour the voltage is increased to 1000 V (RMS) for 0.1 s via resistor of 47 Ω ± 5 % Visual examination Capacitance Tangent of loss angle Voltage proof 1200 V (DC); 1 min between terminations. 2050 V (DC); 1 min between terminations and case. Insulation resistance	No selfhealing breakdowns or flashover No visible damage Legible marking  ΔC/C  ≤ 10 % compared to values measured in 4.13.1. Increase of tan δ: ≤ 0.0100 for: C ≤ 100 nF or ≤ 0.0200 for: 100 nF < C ≤ 470 nF or ≤ 0.0080 for: C > 470 nF Compared to values measured in 4.13.1. No permanent breakdown or flash-over ≥ 50 % of values specified in Section "Insulation resistance" of this specification
<b>SUB - GROUP C 4</b>	D		
4.15 Charge and discharge  4.15.1 Initial measurements  4.15.3 Final measurements		10 000 cycles (50 c/s) charge to UR half sinewave Duration: 5 ms Discharge resistance: $R = \frac{385 \text{ Vdc}}{1.5 \times C((dU)/(dt))}$ R <sub>min</sub> = 2.2 Capacitance Tangent of loss angle For C ≤ 470 nF at 100 kHz For C > 470 nF at 10 kHz Capacitance Tangent of loss angle Insulation resistance	ΔC/C  ≤ 10 % compared to values measured in 4.15.1. Increase of tan d: ≤ 0.0100 for: C ≤ 100 nF or ≤ 0.0200 for: 100 nF < C ≤ 470 nF or ≤ 0.0080 for: C > 470 nF Compared to values measured in 4.15.1 ≥ 50 % of values specified in Section "Insulation resistance" of this specification

Interference Suppression Film Capacitors Vishay BCcomponents  
MKP Radial Potted Type

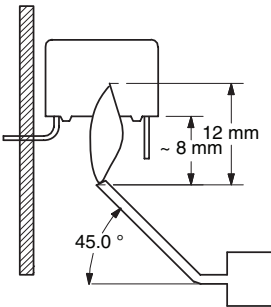SUB - CLAUSE NUMBER AND TEST	D OR ND	CONDITIONS	PERFORMANCE REQUIREMENTS
<b>SUB - GROUP C5</b>	D		
4.16 Radio frequency characteristic		Resonance frequency	As specified in Section "Resonant frequency" of this specification. $\pm 10\%$
<b>SUB - GROUP C6</b>	D		
4.17 Passive flammability Class B		Bore of gas jet: $\varnothing 0.5$ mm Fuel: butane Test duration for actual volume V in mm <sup>3</sup> : V $\leq$ 250: 10 s 250 < V $\leq$ 500: 20 s 500 < V $\leq$ 1750: 30 s V > 1750: 60 s One flame application  	After removing test flame from capacitor, the capacitor must not continue to burn for more than 10 s. No burning particle must drop from the sample.
<b>SUB - GROUP C7</b>	D		
4.18 Active flammability		20 x 4 kV discharges on the test capacitor connected to UR	The cheese cloth around the capacitors shall not burn with a flame. No electrical measurements are required.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.