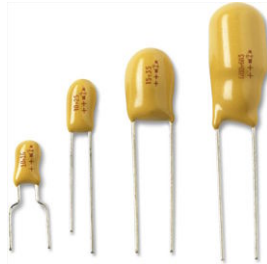


Resin-Coated, Radial-Lead Solid Tantalum Capacitors



FEATURES

- Terminations: standard SnPb, 100 % tin available
- Large capacitance range
- Encapsulated in a hard orange epoxy resin
- Large variety of lead styles available
- Supplied on tape and reel or ammpack
- Low impedance and ESR at high frequencies
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details.

ELECTRICAL CHARACTERISTICS







Operating Temperature: -55 °C to +85 °C: type 489D
 -55 °C to +125 °C (above 85 °C, voltage derating is required): type 499D

APPLICATIONS

Offer a very cost effective solution in the consumer, industrial and professional electronics markets. The capacitors are intended for high volume applications.

| ORDERING INFORMATION | | | | | | | |
|---|--|----------------------------|---|----------------------------------|--|--|--|
| 489D | 686 | X0 | 6R3 | D | 2 | A | E3 |
| TYPE | CAPACITANCE | CAPACITANCE TOLERANCE | DC VOLTAGE RATING AT +85 °C | CASE CODE | LEAD STYLE | PACKAGING | RoHS COMPLIANT |
| 489D Standard +85 °C 499D Standard +125 °C Low IL | Expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros following. | X0 = ± 20 % X9 = ± 10 % | Expressed by zeros if needed to complete the 3 digit block. A decimal point is indicated by an "R" (6R3 = 6.3 V). | See Ratings and Case Codes table | 1, 2, 3, 4, 6, 9 See description on next page | A = ammpack B = reel pack, positive leader C = reel pack, negative leader V = bulk pack | E3 = 100 % tin termination (RoHS compliant design) Blank = SnPb termination (standard design) |

| LEAD STYLE CONFIGURATIONS AND DIMENSIONS (MAX.) in millimeters | | | | | | | | | | | | |
|--|------|----------------|------|---|---------|--------------------------------------|---------|-----|------------|---|---------|--|
| Bulk: Code V | | | | | | Reel / Ammo: Code A, B, C | | | | | | |
| LEAD CASE | D | STYLES 1-2-3-4 | | | STYLE 6 | | STYLE 9 | | STYLES 2-4 | | STYLE 6 | |
| | | P | H | P | H1 | P | H2 | P | H3 | P | H4 | |
| A | 3.7 | 2.5 | 7.0 | 5 | 11.0 | 5 | 10.0 | 2.5 | 7.0 | 5 | 11.0 | |
| B | 4.0 | 2.5 | 7.5 | 5 | 11.5 | 5 | 10.5 | 2.5 | 7.5 | 5 | 11.5 | |
| C | 4.5 | 2.5 | 8.0 | 5 | 12.0 | 5 | 11.0 | 2.5 | 8.0 | 5 | 12.0 | |
| D | 5.0 | 2.5 | 9.0 | 5 | 13.0 | 5 | 12.0 | 2.5 | 9.0 | 5 | 13.0 | |
| E | 5.5 | 2.5 | 10.0 | 5 | 14.0 | 5 | 13.0 | 2.5 | 10.0 | 5 | 14.0 | |
| F | 6.0 | 2.5 | 11.0 | 5 | 15.0 | 5 | 14.0 | 2.5 | 11.0 | 5 | 15.0 | |
| H | 6.5 | 2.5 | 12.0 | 5 | 16.0 | 5 | 15.0 | 2.5 | 12.0 | 5 | 16.0 | |
| M | 10.0 | 5.0 | 14.5 | - | - | 5 | 18.0 | 5.0 | 14.5 | - | - | |
| N | 11.0 | 5.0 | 16.0 | - | - | 5 | 19.0 | - | - | - | - | |
| R | 12.0 | 5.0 | 19.0 | - | - | 5 | 22.0 | - | - | - | - | |

| LEAD STYLE | |
|---|---|
| <p>LEAD STYLE 1:</p> <p>Straight leads, 2.5 mm lead space, uneven length</p>  | <p>LEAD STYLE 2:</p> <p>Straight leads, 2.5 mm lead space, even length</p>  |
| <p>LEAD STYLE 3:</p> <p>Straight leads, 5 mm lead space, uneven length</p>  | <p>LEAD STYLE 4:</p> <p>Straight leads, 5 mm lead space, even length</p>  |
| <p>LEAD STYLE 6:</p> <p>Shouldered leads, 5 mm lead space</p>  | <p>LEAD STYLE 9:</p> <p>Snap-In leads, 5 mm lead space</p>  |

| RATINGS, CASE CODES AND LEAD STYLE | | | | | | | | | | |
|------------------------------------|--|-------|------|------|------|------|------|------|------------|-----------|
| C _R μF | RATED VOLTAGE U _R AT +85 °C | | | | | | | | LEAD STYLE | |
| | 3.0 V | 6.3 V | 10 V | 16 V | 20 V | 25 V | 35 V | 50 V | BULK | AMMO/REEL |
| 0.10 | | | | | | | A | A | | |
| 0.15 | | | | | | | A | A | | |
| 0.22 | | | | | | | A | A | | |
| 0.33 | | | | | | | A | B | | |
| 0.47 | | | | | | | A | B | 1 - 2 | |
| 0.68 | | | | | | | B | C | 6 - 9 | 2 - 6 |
| 1.0 | | | | | | A | B | D | | |
| 1.5 | | | | | A | B | C | E | | |
| 2.2 | | | | A | B | B | C | F | | |
| 3.3 | | | A | B | C | C | D | F | | |
| 4.7 | | A | A | B | C | C | D | H | | |
| 6.8 | A | A | B | C | D | D | E | N | | |
| 10 | B | B | B | C | D | D | F | N | 3 - 4 - 9 | 4 |
| 15 | B | B | C | D | E | E | M | N | | |
| 22 | C | C | C | D | F | H | M | N | | |
| 33 | C | C | D | E | H | M | N | | | |
| 47 | D | D | D | F | M | M | N | | | |
| 68 | D | D | E | M | N | N | | | | |
| 100 | E | E | M | N | N | | | | | |
| 150 | H | M | M | N | | | | | | |
| 220 | M | M | N | R | | | | | | |
| 330 | N | N | R | | | | | | | |
| 470 | N | R | | | | | | | | |
| 680 | R | R | | | | | | | | |



| STANDARD RATINGS | | | | | | |
|--|-----------|-------------------|---------------------------|---------------------------|--------------------------------|----|
| CAPACITANCE C _R (μF) | CASE CODE | PART NUMBER | MAX. DCL | MAX. DCL | MAX. DF, 100 Hz | |
| | | | AT +25 °C (μA) 489D | AT +25 °C (μA) 499D | AT +25 °C (%) 489D, 499D | |
| U_R = 3 V_{DC} AT +85 °C, SURGE = 4 V; U_C = 2 V_{DC} AT +125 °C, SURGE = 2.6 V (ONLY 499D) | | | | | | |
| 6.8 | A | 489D685X(*)003A__ | 1.0 | 0.5 | | 6 |
| 10 | B | 489D106X(*)003B__ | 1.0 | 0.5 | | 8 |
| 15 | B | 489D156X(*)003B__ | 1.0 | 0.5 | | 8 |
| 22 | C | 489D226X(*)003C__ | 1.0 | 0.5 | | 8 |
| 33 | C | 489D336X(*)003C__ | 1.4 | 0.7 | | 8 |
| 47 | D | 489D476X(*)003D__ | 2.1 | 1.1 | | 8 |
| 68 | D | 489D686X(*)003D__ | 3.0 | 1.6 | | 8 |
| 100 | E | 489D107X(*)003E__ | 4.5 | 2.4 | | 10 |
| 150 | H | 489D157X(*)003H__ | 6.7 | 3.6 | | 10 |
| 220 | M | 489D227X(*)003M__ | 9.9 | 5.2 | | 10 |
| 330 | N | 489D337X(*)003N__ | 14.8 | 7.9 | | 10 |
| 470 | N | 489D477X(*)003N__ | 21.1 | 11.2 | | 12 |
| 680 | R | 489D687X(*)003R__ | 30.6 | 16.3 | | 12 |
| U_R = 6.3 V_{DC} AT +85 °C, SURGE = 8 V; U_C = 4 V_{DC} AT +125 °C, SURGE = 5.2 V (ONLY 499D) | | | | | | |
| 4.7 | A | 489D475X(*)6R3A__ | 1.0 | 0.5 | | 6 |
| 6.8 | A | 489D685X(*)6R3A__ | 1.0 | 0.5 | | 6 |
| 10 | B | 489D106X(*)6R3B__ | 1.0 | 0.5 | | 8 |
| 15 | B | 489D156X(*)6R3B__ | 1.4 | 0.7 | | 8 |
| 22 | C | 489D226X(*)6R3C__ | 2.0 | 1.1 | | 8 |
| 33 | C | 489D336X(*)6R3C__ | 3.1 | 1.6 | | 8 |
| 47 | D | 489D476X(*)6R3D__ | 4.4 | 2.3 | | 8 |
| 68 | D | 489D686X(*)6R3D__ | 6.4 | 3.4 | | 8 |
| 100 | E | 489D107X(*)6R3E__ | 9.4 | 5.0 | | 10 |
| 150 | M | 489D157X(*)6R3M__ | 14.1 | 7.5 | | 10 |
| 220 | M | 489D227X(*)6R3M__ | 20.7 | 11.0 | | 10 |
| 330 | N | 489D337X(*)6R3N__ | 31.1 | 16.6 | | 10 |
| 470 | R | 489D477X(*)6R3R__ | 44.4 | 23.6 | | 12 |
| 680 | R | 489D687X(*)6R3R__ | 64.2 | 34.2 | | 12 |
| U_R = 10 V_{DC} AT +85 °C, SURGE = 13 V; U_C = 7 V_{DC} AT +125 °C, SURGE = 8.6 V (ONLY 499D) | | | | | | |
| 3.3 | A | 489D335X(*)010A__ | 1.0 | 0.5 | | 6 |
| 4.7 | A | 489D475X(*)010A__ | 1.0 | 0.5 | | 6 |
| 6.8 | B | 489D685X(*)010B__ | 1.0 | 0.5 | | 6 |
| 10 | B | 489D106X(*)010B__ | 1.5 | 0.8 | | 8 |
| 15 | C | 489D156X(*)010C__ | 2.2 | 1.2 | | 8 |
| 22 | C | 489D226X(*)010C__ | 3.3 | 1.7 | | 8 |
| 33 | D | 489D336X(*)010D__ | 4.9 | 2.6 | | 8 |
| 47 | D | 489D476X(*)010D__ | 7.0 | 3.7 | | 8 |
| 68 | E | 489D686X(*)010E__ | 10.2 | 5.4 | | 8 |
| 100 | M | 489D107X(*)010M__ | 15.0 | 8.0 | | 10 |
| 150 | M | 489D157X(*)010M__ | 22.5 | 12.0 | | 10 |
| 220 | N | 489D227X(*)010N__ | 33.0 | 17.6 | | 10 |
| 330 | R | 489D337X(*)010R__ | 49.5 | 26.4 | | 10 |

Note

489D Type part number 489D, 499D
 (*) Insert 0 for ± 20 % tolerance or 9 for ± 10 %
 __ Case code/lead style see case code table



| STANDARD RATINGS | | | | | | |
|--|-----------|-------------------|---|---|---|--|
| CAPACITANCE C_R (μ F) | CASE CODE | PART NUMBER | MAX. DCL AT +25 °C (μ A) 489D | MAX. DCL AT +25 °C (μ A) 499D | MAX. DF, 100 Hz AT +25 °C (%) 489D, 499D | |
| $U_R = 16 V_{DC}$ AT +85 °C, SURGE = 20 V; $U_C = 10 V_{DC}$ AT +125 °C, SURGE = 13 V (ONLY 499D) | | | | | | |
| 2.2 | A | 489D225X(*)016A__ | 1.0 | 0.5 | 6 | |
| 3.3 | B | 489D335X(*)016B__ | 1.0 | 0.5 | 6 | |
| 4.7 | B | 489D475X(*)016B__ | 1.1 | 0.6 | 6 | |
| 6.8 | C | 489D685X(*)016C__ | 1.6 | 0.8 | 6 | |
| 10 | C | 489D106X(*)016C__ | 2.4 | 1.2 | 8 | |
| 15 | D | 489D156X(*)016D__ | 3.6 | 1.9 | 8 | |
| 22 | D | 489D226X(*)016D__ | 5.2 | 2.8 | 8 | |
| 33 | E | 489D336X(*)016E__ | 7.9 | 4.2 | 8 | |
| 47 | F | 489D476X(*)016F__ | 11.2 | 6.0 | 8 | |
| 68 | M | 489D686X(*)016M__ | 16.3 | 8.7 | 8 | |
| 100 | N | 489D107X(*)016N__ | 24.0 | 12.8 | 10 | |
| 150 | N | 489D157X(*)016N__ | 36.0 | 19.2 | 10 | |
| 220 | R | 489D227X(*)016R__ | 52.8 | 28.1 | 10 | |
| $U_R = 20 V_{DC}$ AT +85 °C, SURGE = 26 V; $U_C = 13 V_{DC}$ AT +125 °C, SURGE = 16 V (ONLY 499D) | | | | | | |
| 1.5 | A | 489D155X(*)020A__ | 1.0 | 0.5 | 4 | |
| 2.2 | B | 489D225X(*)020B__ | 1.0 | 0.5 | 6 | |
| 3.3 | C | 489D335X(*)020C__ | 1.0 | 0.5 | 6 | |
| 4.7 | C | 489D475X(*)020C__ | 1.4 | 0.7 | 6 | |
| 6.8 | D | 489D685X(*)020D__ | 2.0 | 1.0 | 6 | |
| 10 | D | 489D106X(*)020D__ | 3.0 | 1.6 | 8 | |
| 15 | E | 489D156X(*)020E__ | 4.5 | 2.4 | 8 | |
| 22 | F | 489D226X(*)020F__ | 6.6 | 3.5 | 8 | |
| 33 | H | 489D336X(*)020H__ | 9.9 | 5.2 | 8 | |
| 47 | M | 489D476X(*)020M__ | 14.1 | 7.5 | 8 | |
| 68 | N | 489D686X(*)020N__ | 20.4 | 10.8 | 8 | |
| 100 | N | 489D107X(*)020N__ | 30.0 | 16.0 | 10 | |
| $U_R = 25 V_{DC}$ AT +85 °C, SURGE = 32 V; $U_C = 17 V_{DC}$ AT +125 °C, SURGE = 21 V (ONLY 499D) | | | | | | |
| 1.0 | A | 489D105X(*)025A__ | 1.0 | 0.5 | 4 | |
| 1.5 | B | 489D155X(*)025B__ | 1.0 | 0.5 | 4 | |
| 2.2 | B | 489D225X(*)025B__ | 1.0 | 0.5 | 6 | |
| 3.3 | C | 489D335X(*)025C__ | 1.2 | 0.6 | 6 | |
| 4.7 | C | 489D475X(*)025C__ | 1.7 | 0.9 | 6 | |
| 6.8 | D | 489D685X(*)025D__ | 2.5 | 1.3 | 6 | |
| 10 | D | 489D106X(*)025D__ | 3.7 | 2.0 | 8 | |
| 15 | E | 489D156X(*)025E__ | 5.6 | 3.0 | 8 | |
| 22 | H | 489D226X(*)025H__ | 8.2 | 4.4 | 8 | |
| 33 | M | 489D336X(*)025M__ | 12.3 | 6.6 | 8 | |
| 47 | M | 489D476X(*)025M__ | 17.6 | 9.4 | 8 | |
| 68 | N | 489D686X(*)025N__ | 25.5 | 13.6 | 8 | |

Note

489D Type part number 489D, 499D

(*) Insert 0 for ± 20 % tolerance or 9 for ± 10 %

__ Case code/lead style see case code table



| STANDARD RATINGS | | | | | | |
|--|-----------|-------------------|---------------------------------------|---------------------------------------|---|--|
| CAPACITANCE C _R (μF) | CASE CODE | PART NUMBER | MAX. DCL AT +25 °C (μA) 489D | MAX. DCL AT +25 °C (μA) 499D | MAX. DF, 100 Hz AT +25 °C (%) 489D, 499D | |
| U_R = 35 V_{DC} AT +85 °C, SURGE = 46 V; U_C = 23 V_{DC} AT +125 °C, SURGE = 28 V (ONLY 499D) | | | | | | |
| 0.10 | A | 489D104X(*)035A__ | 1.0 | 0.5 | 4 | |
| 0.15 | A | 489D154X(*)035A__ | 1.0 | 0.5 | 4 | |
| 0.22 | A | 489D224X(*)035A__ | 1.0 | 0.5 | 4 | |
| 0.33 | A | 489D334X(*)035A__ | 1.0 | 0.5 | 4 | |
| 0.47 | A | 489D474X(*)035A__ | 1.0 | 0.5 | 4 | |
| 0.68 | B | 489D684X(*)035B__ | 1.0 | 0.5 | 4 | |
| 1.0 | B | 489D105X(*)035B__ | 1.0 | 0.5 | 4 | |
| 1.5 | C | 489D155X(*)035C__ | 1.0 | 0.5 | 4 | |
| 2.2 | C | 489D225X(*)035C__ | 1.1 | 0.6 | 6 | |
| 3.3 | D | 489D335X(*)035D__ | 1.7 | 0.9 | 6 | |
| 4.7 | D | 489D475X(*)035D__ | 2.4 | 1.3 | 6 | |
| 6.8 | E | 489D685X(*)035E__ | 3.5 | 1.9 | 6 | |
| 10 | F | 489D106X(*)035F__ | 5.2 | 2.8 | 8 | |
| 15 | M | 489D156X(*)035M__ | 7.8 | 4.2 | 8 | |
| 22 | M | 489D226X(*)035M__ | 11.5 | 6.1 | 8 | |
| 33 | N | 489D336X(*)035N__ | 17.3 | 9.2 | 8 | |
| 47 | N | 489D476X(*)035N__ | 24.6 | 13.1 | 8 | |
| U_R = 50 V_{DC} AT +85 °C, SURGE = 65 V; U_C = 33 V_{DC} AT +125 °C, SURGE = 40 V (ONLY 499D) | | | | | | |
| 0.10 | A | 489D104X(*)050A__ | 1.0 | 0.5 | 4 | |
| 0.15 | A | 489D154X(*)050A__ | 1.0 | 0.5 | 4 | |
| 0.22 | A | 489D224X(*)050A__ | 1.0 | 0.5 | 4 | |
| 0.33 | B | 489D334X(*)050B__ | 1.0 | 0.5 | 4 | |
| 0.47 | B | 489D474X(*)050B__ | 1.0 | 0.5 | 4 | |
| 0.68 | C | 489D684X(*)050C__ | 1.0 | 0.5 | 4 | |
| 1.0 | D | 489D105X(*)050D__ | 1.0 | 0.5 | 4 | |
| 1.5 | E | 489D155X(*)050E__ | 1.1 | 0.6 | 4 | |
| 2.2 | F | 489D225X(*)050F__ | 1.6 | 0.8 | 6 | |
| 3.3 | F | 489D335X(*)050F__ | 2.4 | 1.3 | 6 | |
| 4.7 | H | 489D475X(*)050H__ | 3.5 | 1.8 | 6 | |
| 6.8 | N | 489D685X(*)050N__ | 5.1 | 2.7 | 6 | |
| 10 | N | 489D106X(*)050N__ | 7.5 | 4.0 | 8 | |
| 15 | N | 489D156X(*)050N__ | 11.2 | 6.0 | 8 | |
| 22 | N | 489D226X(*)050N__ | 16.5 | 8.8 | 8 | |

Note

489D Type part number 489D, 499D
 (*) Insert 0 for ± 20 % tolerance or 9 for ± 10 %
 __ Case code/lead style see case code table

| PACKAGING QUANTITIES | | | | | | | | | | | |
|----------------------|------|---|------|---|------|---|---|-----|---|---|--|
| CASE CODE | A | B | C | D | E | F | H | M | N | R | |
| BULK | 500 | | | | | | | 100 | | | |
| AMMOPACK | 2500 | | 2000 | | 1500 | | | 500 | | | |
| REEL PACK | 2500 | | 2000 | | 1500 | | | 500 | | | |



PERFORMANCE CHARACTERISTICS

- 1. **Operating Temperature:** -55 °C to +85 °C with rated DC voltage U_R applied. +85 °C to +125 °C with linear voltage derating to category voltage U_C for 499D only (see general information)
- 2. **Capacitance and Tolerance:** capacitance measured at 100 Hz and +25 °C shall be within the specified tolerance limits of the nominal rating. Capacitance measurement shall be made by means of a polarized capacitance bridge. No polarizing voltage is required. The maximum voltage applied during measurements shall be 0.5 V_{RMS} at 100 Hz and +25 °C.
- 3. **Reverse Voltage:** these capacitors are capable of withstanding peak voltage in the reverse direction equal to:
 - 15 % of the rated DC voltage at +20 °C
 - 10 % of the rated DC voltage at +25 °C
 - 5 % of the rated DC voltage at +85 °C

4. Surge Voltage:

| | | | | | | | | |
|--|-----|-----|-----|----|----|----|----|----|
| DC rated voltage at +85 °C (V) | 3 | 6.3 | 10 | 16 | 20 | 25 | 35 | 50 |
| DC surge voltage at +85 °C (V) | 4 | 8 | 13 | 20 | 26 | 32 | 46 | 65 |
| DC rated voltage at +125 °C (V) ⁽¹⁾ | 2 | 4 | 7 | 10 | 13 | 17 | 23 | 33 |
| DC surge voltage at +125 °C (V) ⁽¹⁾ | 2.6 | 5.2 | 8.6 | 13 | 16 | 21 | 28 | 40 |

Note

⁽¹⁾ For 499D

Capacitors shall withstand the surge voltage applied in series with a 1000 Ω (± 5 %) resistor, at the rate of 1.5 min on, 5.5 min off for 1000 successive test cycles at +85 °C.

5. Stability at low and high temperatures:

489D - Table 2A

| TEMP. | CAPACITANCE CHANGE | DC LEAKAGE CURRENT ⁽¹⁾ | DISSIPATION FACTOR AT 100 Hz |
|--------|------------------------|--|--|
| -55 °C | -10 % of initial value | ----- | $C_R \leq 1.5 \mu F$ 4 % max $1.5 \mu F < C_R < 10 \mu F$ 6 % max $10 \mu F < C_R < 100 \mu F$ 8 % max $100 \mu F \leq C_R \leq 330 \mu F$ 10 % max $330 \mu F < C_R$ 12 % max |
| +25 °C | ----- | 0.015 $C_R \times U_R$ or 1 μA , whichever is greater | |
| +85 °C | +10 % of initial value | 0.15 $C_R \times U_R$ or 10 μA , whichever is greater | |

| TEMP. | CAPACITANCE CHANGE | DC LEAKAGE CURRENT ⁽¹⁾ | DISSIPATION FACTOR AT 100 Hz |
|------------------------|------------------------|--|--|
| -55 °C | -10 % of initial value | ----- | $C_R \leq 1.5 \mu F$ 4 % max $1.5 \mu F < C_R < 10 \mu F$ 6 % max $10 \mu F < C_R < 100 \mu F$ 8 % max $100 \mu F \leq C_R \leq 330 \mu F$ 10 % max $330 \mu F < C_R$ 12 % max |
| +25 °C | ----- | 0.008 $C_R \times U_R$ or 0.5 μA , whichever is greater | |
| +85 °C | +10 % of initial value | 0.08 $C_R \times U_R$ or 5 μA , whichever is greater | |
| +125 °C ⁽²⁾ | +10 % of initial value | 0.1 $C_R \times U_R$ or 6.25 μA , whichever is greater | |

Notes

⁽¹⁾ Rated voltage applied for 5 min with a series resistor of 1000 Ω

⁽²⁾ Only for 499 D

After test, capacitance change shall not exceed 10 % of initial value, dissipation factor and DC leakage current shall meet initial requirements at +25 °C - Table 2.

- 6. **Life Test:** after 2000 h at +85 °C with rated DC voltage applied, or after 1000 h at +125 °C. With derated DC voltage (only for 499D), capacitors shall meet the requirements in table below.

| | |
|--------------------|---------------------------------------|
| Capacitance change | Within ± 10 % of initial value |
| DC leakage current | Within initial requirements at +25 °C |
| Dissipation factor | Within initial requirements at +25 °C |

- 7. **Humidity Test:** after 21 days (504 h) ⁽¹⁾ at +40 °C, 90 % to 95 % of relative humidity (per IEC 68-2-3) with no voltage applied, capacitors shall meet the requirements in table below.

| | |
|--------------------|---|
| Capacitance change | Within ± 5 % of initial value |
| DC leakage current | Within initial requirements at +25 °C - Table 2 |
| Dissipation factor | Within initial requirements at +25 °C - Table 2 |

Note

⁽¹⁾ Humidity test is 56 days (1350 hours) for 499D

- 8. **Marking:** the capacitors shall be marked with the rated capacitance and the rated DC working voltage. A code may be used for both capacitance and voltage. Units rated at 6.3 volts are usually marked as 6 volts. The package shall be marked with full Vishay part number, date code, and quantity.



GUIDE TO APPLICATION

1. **AC Ripple Current:** the maximum allowable ripple current shall be determined from the formula:

$$I_{RMS} = \sqrt{\frac{P}{R_{ESR}}}$$

where,

P = power dissipation in W at +25 °C as given below

R_{ESR} = the capacitor Equivalent Series Resistance at the specified frequency

2. **AC Ripple Voltage:** the maximum allowable ripple voltage shall be determined from the formula:

$$V_{RMS} = \sqrt{\frac{P}{R_{ESR}}} \times Z$$

where,

Z = the capacitor impedance at the specified frequency

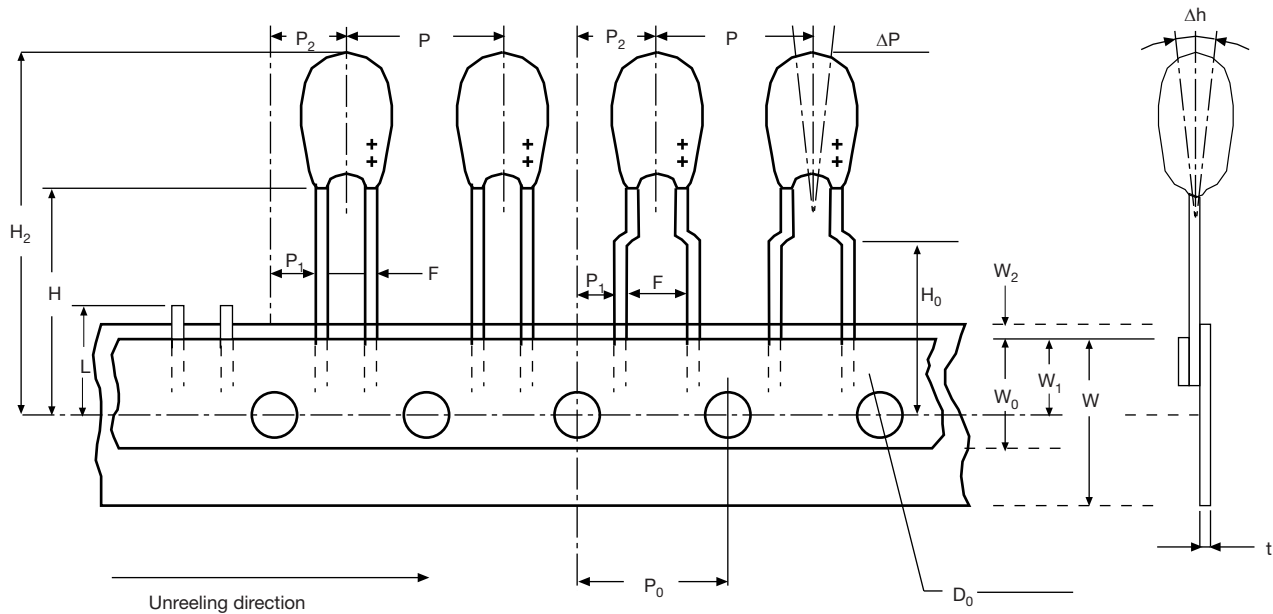
3. **AC Ripple Current or Voltage Derating Factor:** if these capacitors are to be operated at temperatures above +25 °C, the permissible RMS ripple current or voltage shall be calculated using the derating factors in the table below:

| TEMPERATURE | DERATING FACTOR |
|-------------|-----------------|
| +25 °C | 1.0 |
| +55 °C | 0.9 |
| +85 °C | 0.8 |
| +125 °C | 0.4 |

4. **Power Dissipation:** power dissipation will be affected by the heat sinking capability of the mounting surface. Non-sinusoidal ripple current may produce heating effects which differ from those shown in the following table. It is important that the equivalent I_{RMS} value be established when calculating permissible operating levels.

| CASE CODE | POWER DISSIPATION AT +25 °C (W) |
|-----------|---------------------------------|
| A | 0.080 |
| B | 0.090 |
| C | 0.100 |
| D | 0.110 |
| E | 0.120 |
| F | 0.130 |
| H | 0.140 |
| M | 0.150 |
| N | 0.160 |
| R | 0.180 |

5. **Cleaning:** these capacitors are compatible with all commonly used solvents, such as TES, TMS, Prelete and Chloretane. Solvents containing methylene chloride or other epoxy solvents should be avoided since these will attack the epoxy encapsulation material.

TAPE AND REEL PACKAGING in millimeters


Dimensions for components on tape and tolerances:

| DESIGNATION | SYMBOL | DIMENSIONS (mm) | |
|---------------------------------|------------|------------------|----------------|
| Pitch of component | P | 12.7 ± 1.0 | |
| Feed hole pitch | P_0 | 12.7 ± 0.3 | |
| Tape width | W | 18 (+ 1/- 0.5) | |
| Hold down tape width | W_0 | 5.0 | |
| Hole position | W_1 | 9 (+ 0.75/- 0.5) | |
| Hold down tape position | W_2 | 0 (+ 3/- 0) | |
| Overall component height | H_1 | 32 max. | |
| Component alignment | ΔP | ± 1.3 max. | |
| Feed hole diameter | D_0 | 4.0 ± 0.3 | |
| Tape thickness | t | 0.5 ± 0.2 | |
| Component alignment | ΔH | 0 ± 2 | |
| Length of snapped leads | L | 11 max. | |
| Lead clinch height | H_0 | 16.0 ± 0.5 | |
| Lead wire spacing | F | 2.5 (+ 0.6/-0.1) | 5 (+ 0.6/-0.1) |
| Feed hole center to wire center | P_1 | 5.1 ± 0.7 | 3.65 ± 0.7 |
| Hole center to component center | P_2 | 6.35 ± 1.3 | 6.35 ± 1.3 |
| Component height | H | 18 ± 1 | |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.