





Heyco® Nylon PCB Supports - Blind Mount

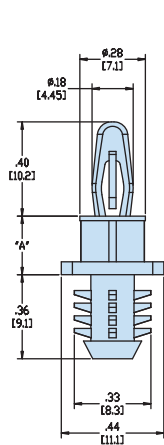


BAYONET SNAP LOCK 10,2 /
BLIND FIR TREE

HBS

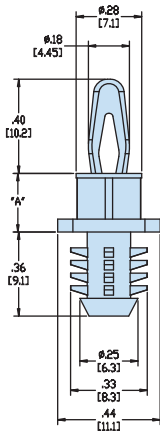


BAYONET SNAP FIT 10,2 /
BLIND FIR TREE

HBS2

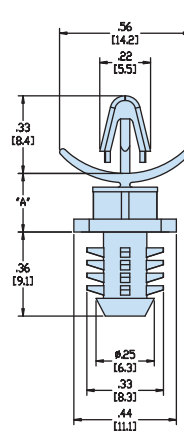

ARROWHEAD SNAP LOCK /
BLIND FIR TREE

HBS3

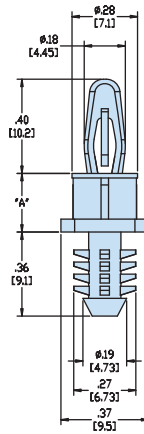

BAYONET SNAP LOCK 10,2 /
BLIND FIR TREE

HBS4

	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.062	1,6	.157	4,0	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0
Chassis	.250	6,4	.312	7,9	.250	6,4	.312	7,9	.250	6,4	.312	7,9	.250	6,4	.250	6,4

A	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
.187	4,8	10553	HBS-03	10562	HBS2-03	10578	HBS4-03	
.250	6,4	10554	HBS-04	10563	HBS2-04	10579	HBS4-04	
.375	9,5	10555	HBS-06	10564	HBS2-06	10580	HBS4-06	
.437	11,1	10556	HBS-07	10565	HBS2-07	10581	HBS4-07	
.500	12,7	10557	HBS-08	10566	HBS2-08	10582	HBS4-08	
.625	15,9	10558	HBS-10	10567	HBS2-10	10583	HBS4-10	
.750	19,1	10559	HBS-12	10568	HBS2-12	10584	HBS4-12	
.875	22,2	10560	HBS-14	10569	HBS2-14	10585	HBS4-14	

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

Quick Specs

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: .4°F (-18°C) to 185°F (85°C)