


3.5" SubCompact Board with 8th Generation Intel® Core™ i7/i5/i3/Celeron® Processor SoC

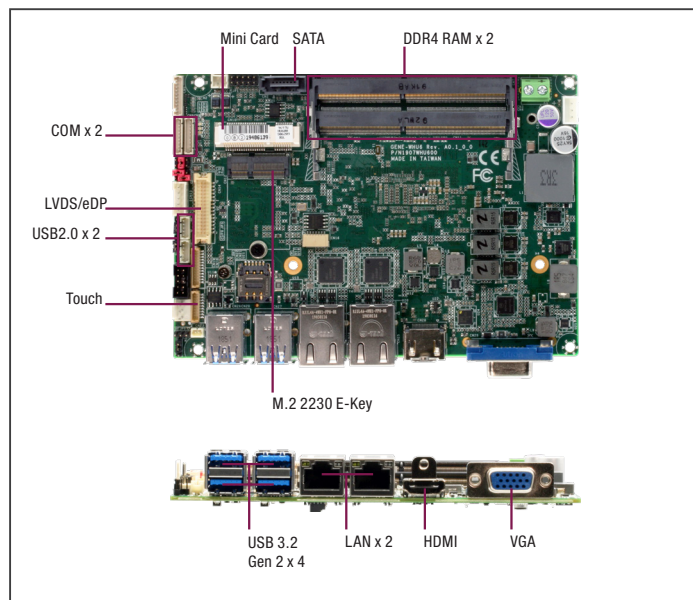

Specifications

SYSTEM	
FORM FACTOR	3.5" SubCompact Board
CPU	Intel® 8th Generation Core™ /Celeron Processor: Core i7-8665UE (4C/8T, 1.7GHz, up to 4.40GHz) Core i5-8365UE (4C/8T, 1.6GHz, up to 4.10GHz) Core i3-8145UE (2C/4T, 2.2GHz, up to 3.90GHz) Celeron 4305UE (2C/2T, 2.00GHz)
CPU TDP	15W, TDP-up 25W: i7-8665UE/i5-8365UE/i3-8145UE 15W: 4305UE
CHIPSET	Integrated with Intel® SoC
MEMORY TYPE	DDR4 up to 2400MHz Dual Channel, SODIMM x 2, up to 64GB, Non-ECC
BIOS	UEFI
WAKE ON LAN	Yes
WATCHDOG TIMER	255 Levels
SECURITY	—
RTC Battery	Lithium Battery 3V/240mAh
DIMENSION (L X W)	5.75" x 4" (146mm x 101.7mm)
POWER	
POWER REQUIREMENT	+9-36V (Optional: +12V)
POWER SUPPLY TYPE	AT/ATX
CONNECTOR	Phoenix 2-pin Connector
POWER CONSUMPTION	Intel® i7-8665UE, DDR4 2400MHz 16GB x2, 4.83A@ +12V(TYPICAL) Intel® i7-8665UE, DDR4 2400MHz 16GB x2, 7.3A@ +12V(MAX)
DISPLAY	
CONTROLLER	Intel® UHD Graphics 610/620
LVDS/eDP	LVDS Dual Channel 18/24bit x 1 (Optional: eDP1.4)
Display Interface	HDMI2.0a x 1 VGA x 1
Multiple Display	Up to 3 Simultaneous Displays
AUDIO	
CODEC	Realtek ALC897/892
AUDIO INTERFACE	Line-in/Line-out/MIC
Speaker	—
EXTERNAL I/O	
ETHERNET	Intel® i210/i211 & i219, 10/100/1000Base, RJ-45 x2
USB	USB 3.2 Gen2 x4
SERIAL PORT	—
VIDEO	HDMI2.0a x 1, VGA x 1
INTERNAL I/O	
USB	USB 2.0 x 2
SERIAL PORT	COM1 (RS232/422/485, supports RI) COM2 (RS232/422/485, supports 5V/12V/RI)

Features

- LVDS/eDP x 1 (Default: LVDS), VGA x 1, HDMI 2.0 x 1
- GbE x 2, SATA III x 1, DIO x 8bit
- USB 3.2 Gen 2 x 4 (Up to Gen 2), RS-232/422/485 x 2
- Full size mSATA/mPCIe Slot x 1 (With Nano-SIM)
- M.2 2280 B key x 1, M.2 2230 E key x 1
- Wide DC Input 9-36V (Optional: 12V Only)



VIDEO	LVDS/eDP x 1 (Default: LVDS)
SATA	SATA III x 1 +5V SATA Power Connector x 1
AUDIO	Audio Header x 1
DIO/GPIO	8-bit
SMBus/I2C	I2C/ SMBus x 1 (Default: I2C)
Touch	4/5/8-wire Touch Controller x 1 (optional)
FAN	DC Fan x 1 (optional: Smart Fan)
SIM	Nano SIM x 1
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	—
EXPANSION	
Mini PCI-E/mSATA	Full-size mSATA/mPCIe x 1 (Default mSATA, select by BIOS)
M.2	B-Key 2280 x 1 (PCIe x 2, SATA, USB2.0, selected by BIOS) E-Key 2230 x 1 (PCIe, USB2.0)
Others	—
ENVIRONMENT & CERTIFICATION	
OPERATING TEMP	32°F ~ 140°F (0°C ~ 60°C)
STORAGE TEMP	-40°F ~ 176°F (-40°C ~ 80°C)
OPERATING HUMIDITY	0% ~ 90% relative humidity, non-condensing
MTBF (HOURS)	354,194
EMC	CE/FCC Class A


Optional Accessories

Part Number	Description	QTY per Board
1702150155	SATA Power Cable, 15cm	1
1709070500	SATA CABLE, 50cm	1
170204010R	Power Cable, 10cm	1
1709100254	Audio JACK Cable, 25cm	1
170220020B	ATX Power Cable, 20cm	1
1701090150	COM Cable, 15cm	2
1700050207	USB CABLE, 20cm	2
GENE-WHU6-FAN01	CPU Cooler.146x78.6x23.5mm.3P.3600RPM	1
GENE-WHU6-FAN02	CPU Cooler.146x75.54x17.5mm.3P.4800RPM	1
GENE-WHU6-HSK01	Heatsink.146x101.6x32.5mm.Silver.for i3 & Celeron	1
GENE-WHU6-HSK02	Heat Sink.72x28x10mm.SODIMM DDR4	1
GENE-WHU6-HSK03	Heat sink.146x101.6x45.5mm	1

Packing List


Part Number	Description	QTY
	GENE-WHU6 MB	1
1709070500	Heat spreader	1

Block Diagram

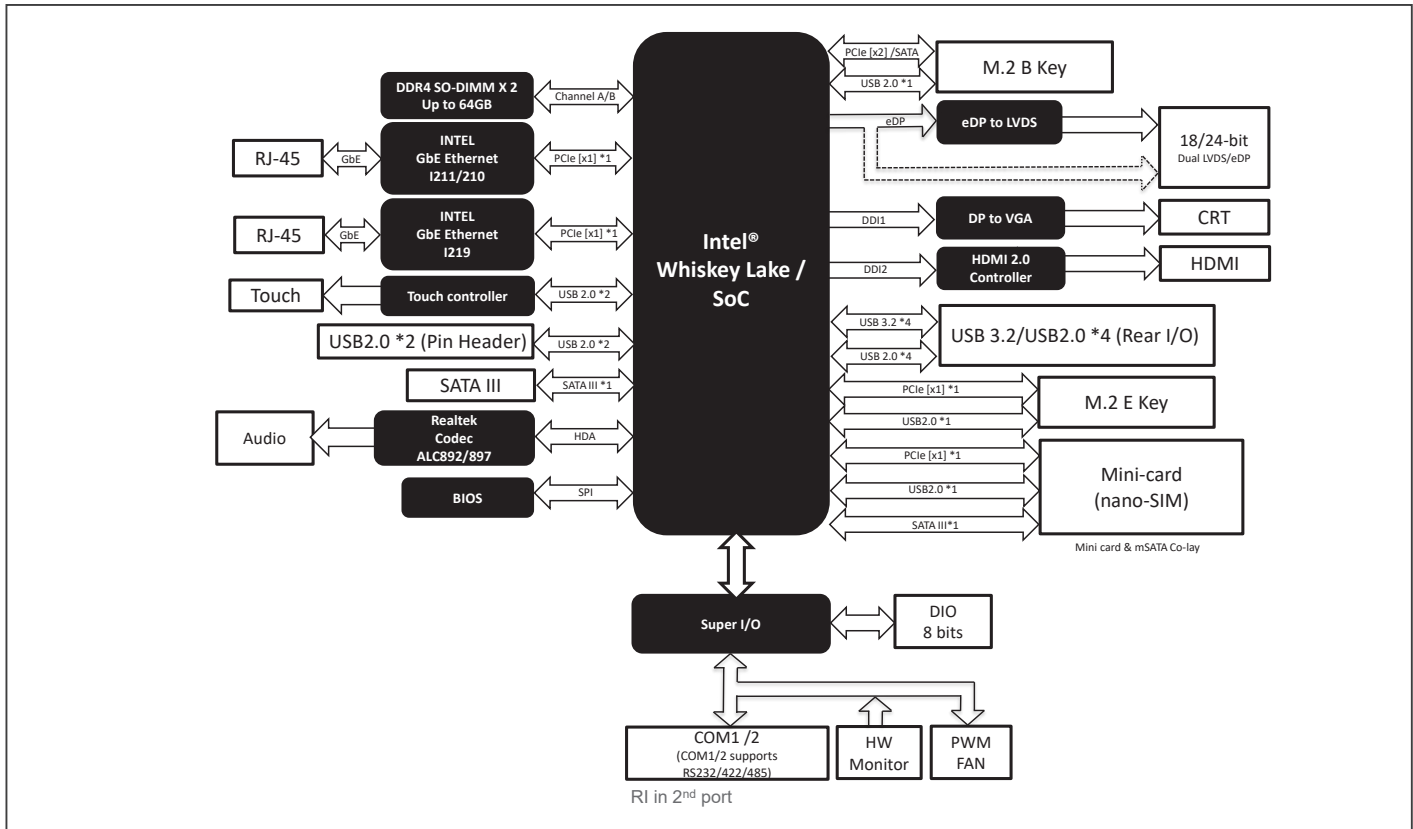

Dimension

Unit: mm

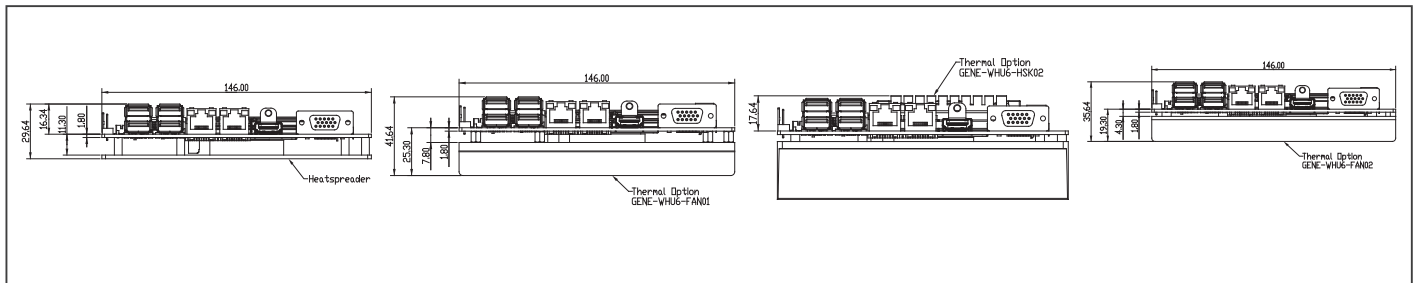

Ordering Information

Part Number	CPU	Display	LAN	USB	RS-232/422/485	Storage	Expansion Slot	Power	Operating Temp	Others
GENE-WHU6-A11-0001	Intel® i7-8665UE	VGA+HDMI+LVDS	GbE x 2	USB 3.2 Gen 2 x 4	2	SATA x 1 mSATA (Full size)x 1	M.2 2280 B Key x1 M.2 2230 E Key x1	9-36V	0°C – 60°C	DIO x 8, nano SIM, Touch Controller
GENE-WHU6-A11-0002	Intel® i5-8365UE	VGA+HDMI+LVDS	GbE x 2	USB 3.2 Gen 2 x 4	2	SATA x 1 mSATA (Full size)x 1	M.2 2280 B Key x1 M.2 2230 E Key x1	9-36V	0°C – 60°C	DIO x 8, nano SIM, Touch Controller
GENE-WHU6-A11-0003	Intel® i3-8145UE	VGA+HDMI+LVDS	GbE x 2	USB 3.2 Gen 2 x 4	2	SATA x 1 mSATA (Full size)x 1	M.2 2280 B Key x1 M.2 2230 E Key x1	9-36V	0°C – 60°C	DIO x 8, nano SIM, Touch Controller
GENE-WHU6-A11-0004	Intel® Celeron 4305UE	VGA+HDMI+LVDS	GbE x 2	USB 3.2 Gen 2 x 4	2	SATA x 1 mSATA (Full size)x 1	M.2 2280 B Key x1 M.2 2230 E Key x1	9-36V	0°C – 60°C	DIO x 8, nano SIM, Touch Controller

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [MI958F-16C](#)
[S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI 102110548](#) [BEAGLEBOARD](#)
[POCKET BPI-M5](#) [GENE-APL5-A12-F002](#) [UPN-EHLCN2-A10-0232](#) [UPN-EHLPJ4-A10-0432](#) [MICROSOM I2 + WIFI/BT](#)
[HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-](#)
[440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-](#)
[SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#)
[BBBLUE](#) [IB811F-I30](#) [DFR0546](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#)
[GLS11.2.053.2.2.E](#) [SLS16Y2_792C_512R_SD_1WB_C_B](#) [A20-OLINUXINO-LIME-E16GS16M](#)