


PICO-KBU4-SEMI

Pico-ITX TurnKit with 7th Generation Intel® Core™ i7/i5/i3/Celeron® U-Series Processor SoC

Front View



Rear View

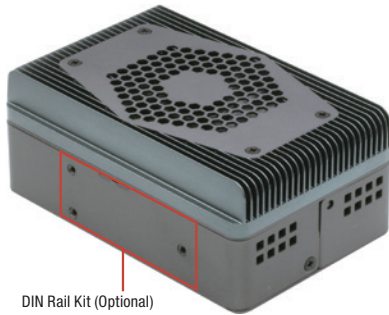

DIN Rail Kit (Optional)

Features

- Extreme light system, easy to adopt everywhere
- DDR4 Non-ECC SODIMM Slot x 1, up to 16GB
- GbE x 2, HDMI x 1.4
- M.2 2242 B key for storage
- M.2 2230 E key for wireless Module
- COM x 2 (Optional)
- USB 3.2 Gen 1 x 2 (Rear IO)
- Lockable DC 12V



I/O	
Storage/SSD	M.2 2242 B key
USB Port	USB 3.2 Gen 1 x 2 (Rear IO)
Serial Port	Optional
Audio	—
Expansion Slot	RS-232 x 1, RS-232/422/485 x1 (Optional)
Certification	
Certification	CE, FCC

Packing List

- PICO-KBU4-SEMI


Specifications

System	
Form Factor	Pico-ITX
Processor	7th Gen Intel® Core™ i processor U series
System Memory	DDR4 SODIMM Slot x 1, Up to 16 GB
Chipset	Intel® SoC
Ethernet	Realtek 8111G Gigabit Ethernet 10/100/1000Base, RJ-45 x 2
BIOS	AMI BIOS
Wake on LAN	Yes
Watchdog Timer	255 Level
Expansion Interface	M.2 2230 E key (For WIFI/BT Module)
Power Requirement	Normal: +12V
Power Supply Type	Lockable
Power Consumption	I7-7600 @ DDR4 16GB, 12V@2.3A
System Size	4.8" x 3.15" x 2" (122 x 72 x 50 mm)
Gross Weight	0.88 lb (0.4 kg)
Operation Temp.	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0% ~ 90% relative humidity, non-condensing
MTBF	163,000
Display	
Chipset	Intel® SoC
Video Output	HDMI 1.4
Touch	—

Optional Accessories


Part Number	Description	Qty.
125530040C	(TF)Power Adapter.12V.40W.FSP.FSP040-DHAN3	1
1702031802	Power Cord (US)	1
1702031803	Power Cord(European Type)	1
170203180E	Power Cord(Japan Type)	1
1701200101	(TF)SERIAL Cable.WL1010H-2*10P 1.0mm Housing.Dual DB9(M). Line-Out Jack.10cm	1
9761SEMI01	Din Rail Kit	1
9761SEMI00	Wall mount Kit	1

Block Diagram

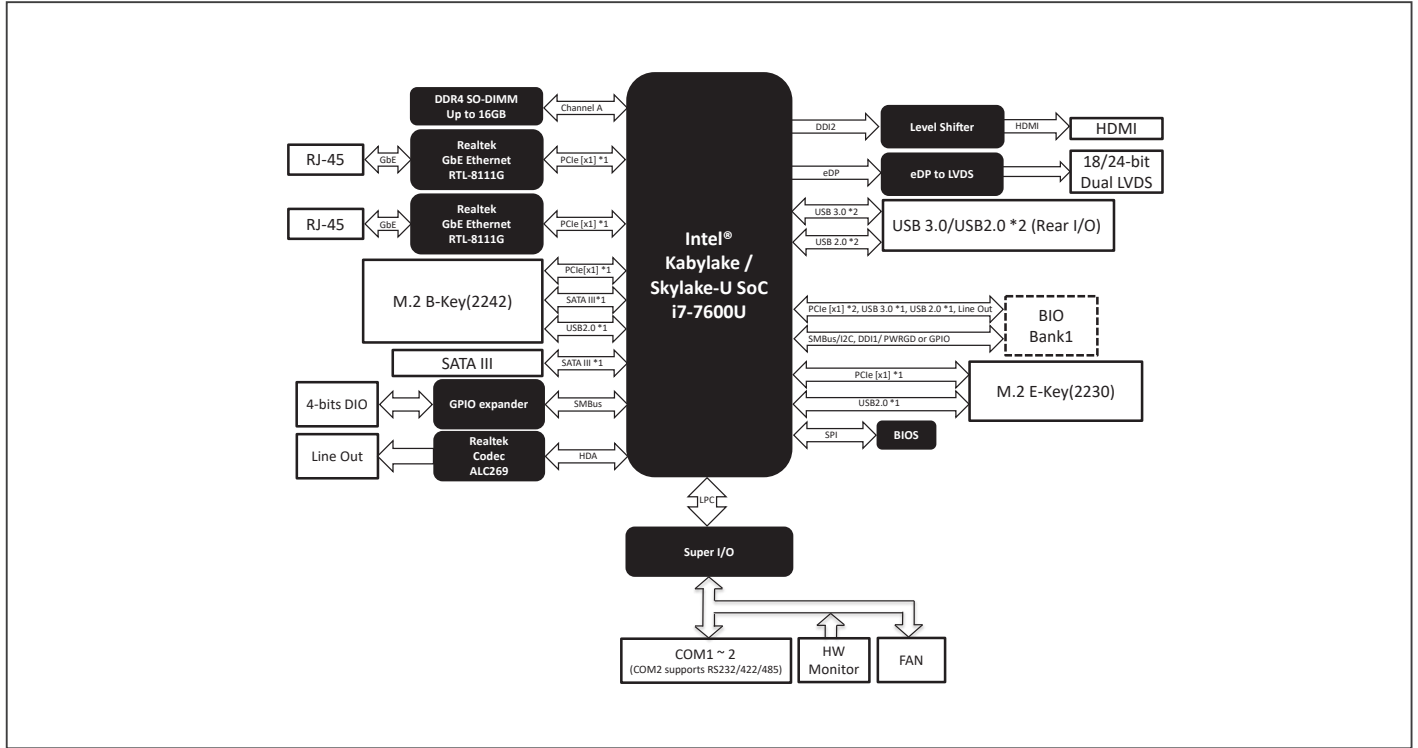

Dimension

Unit: mm

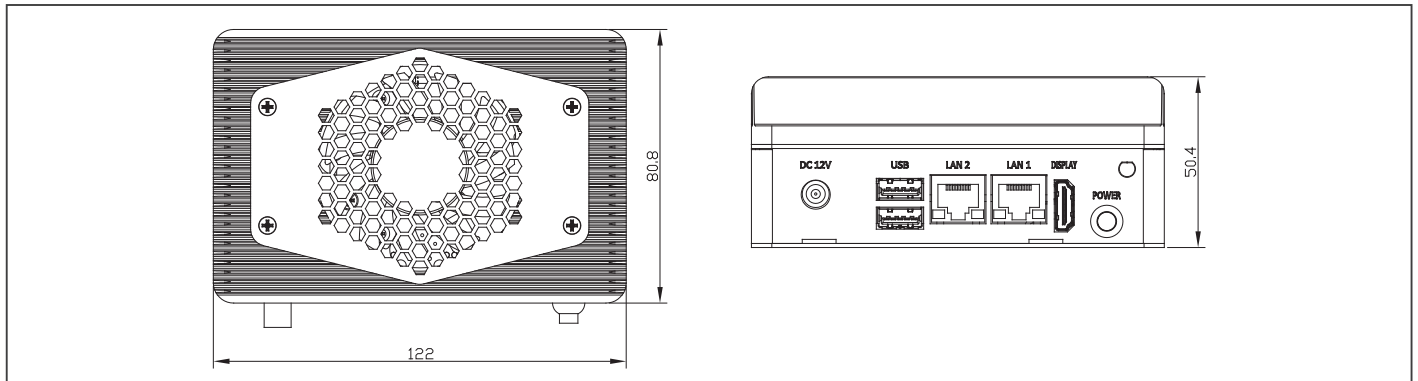

Ordering Information

Part Number	CPU	Memory	Thermal	Display	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Power Temp	Others
PICO-KBU4-SEMI-A10-B001	Celeron 3965	DDR4 Socket	w/Cooler	HDMI x 1	SATAIII x 1 M.2 2242 (B Key) x 1	GbE x 2	USB 3.2 Gen 1 x 2 (Rear)	--	--	M.2 2230 (E Key) x 1	+12V (ATX)	0°C ~ 50°C	DIO 4 bit
PICO-KBU4-SEMI-A10-B002	i3-7100U	DDR4 Socket	w/Cooler	HDMI x 1	SATAIII x 1 M.2 2242 (B Key) x 1	GbE x 2	USB 3.2 Gen 1 x 2 (Rear)	--	--	M.2 2230 (E Key) x 1	+12V (ATX)	0°C ~ 50°C	DIO 4 bit
PICO-KBU4-SEMI-A10-B003	i5-7300U	DDR4 Socket	w/Cooler	HDMI x 1	SATAIII x 1 M.2 2242 (B Key) x 1	GbE x 2	USB 3.2 Gen 1 x 2 (Rear)	--	--	M.2 2230 (E Key) x 1	+12V (ATX)	0°C ~ 50°C	DIO 4 bit
PICO-KBU4-SEMI-A10-B004	i7-7600U	DDR4 Socket	w/Cooler	HDMI x 1	SATAIII x 1 M.2 2242 (B Key) x 1	GbE x 2	USB 3.2 Gen 1 x 2 (Rear)	--	--	M.2 2230 (E Key) x 1	+12V (ATX)	0°C ~ 50°C	DIO 4 bit
PICO-KBU4-SEMI-A10-B005 (6th Gen)	Celeron 3955	DDR4 Socket	w/Cooler	HDMI x 1	SATAIII x 1 M.2 2242 (B Key) x 1	GbE x 2	USB 3.2 Gen 1 x 2 (Rear)	--	--	M.2 2230 (E Key) x 1	+12V (ATX)	0°C ~ 50°C	DIO 4 bit

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[I350T4V2](#) [GX-OD1612](#) [TDKEZW3](#) [I350T2V2](#) [V23993-USB1029A](#) [I350T2V2BLK](#) [FC6A-PH1](#) [EM-ETH-GATEWAY-IFS](#) [EK1122](#)
[EL1018](#) [EL1809](#) [EL2622](#) [EL2904](#) [EL6021](#) [EL6224](#) [EL6631](#) [EL9011](#) [EL9100](#) [KL1002](#) [KL1104](#) [KL2602-0010](#) [KL3208-0010](#) [KL6821](#)
[KL9100](#) [KL9200](#) [X710T2L](#) [RY9012A0000GZ00#002](#) [X710T4LBLK](#) [7000-14561-7960150](#) [7000-44711-7960300](#) [7000-44711-7960750](#)
[7000-44711-7961000](#) [7000-74711-4780150](#) [7000-89701-7910500](#) [7000-P6241-P060500](#) [2352903-2](#) [BOXER-6614-A1M-1110](#) [ED-593](#) [WC-](#)
[PD13C033I-1](#) [EL2809-0015](#) [WC-PD30A012C](#) [NS8](#) [NS2](#) [NS4](#) [USR-K3](#) [USR-K2](#) [USR-TCP232-E2](#) [WC-PD13S120B](#) [WC-PD13C012S](#)
[WC-PD07H012C](#)