



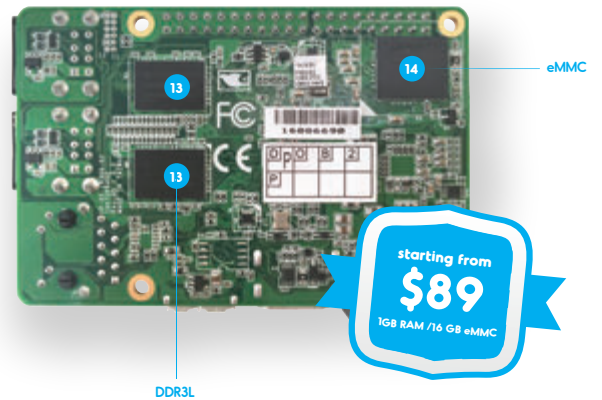

bridge
the gap

specification

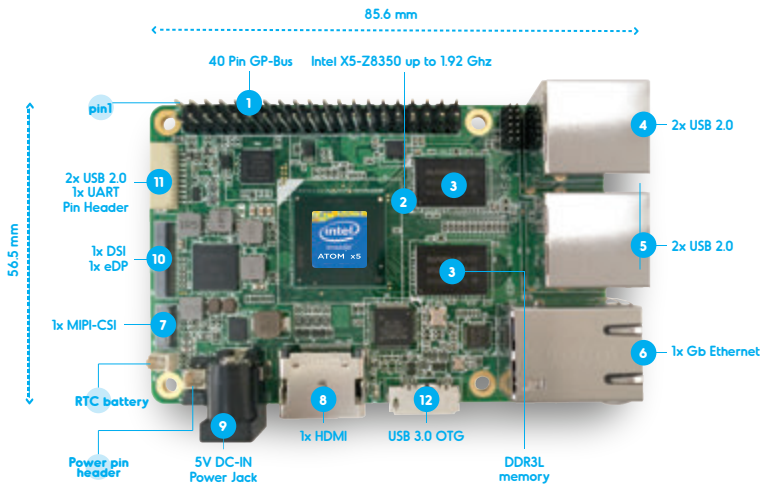

UP is a credit card size board with the high performance and low power consumption features of the latest tablet technology: the **Intel® Atom™ x5 Z8350 Processors (codename Cherry Trail) 64 bits up to 1.92GHz**. The internal GPU is the new **Intel Gen 8 HD 400 with 12 Execution Units up to 500MHz** to deliver extremely high **3D graphic** performance. UP is equipped with **1GB/2GB/4GB DDR3L RAM** and **16GB/32GB/64GB eMMC**.

UP has **40-pin General Purpose bus** which provides the freedom to makers to build up their shield. There are more interfaces available, such as **4x port USB2.0 on connectors, 2x port USB2.0 + 1x UART on header, 1x USB 3.0 OTG, 1x Gbit Ethernet (full speed), 1x DSI/eDP port, 1x Camera (MIPI-CSI), 1x HDMI, RTC**.

When it comes to security, UP has **Intel security features** needed for professional IoT applications such **Intel AES New Instructions and Intel Identity Protection Technology**.

It's UP to you to choose which operation system is best for your application. The CPU is supported by **Android 6.Marshmallow, Microsoft Windows 10** and we support and enable **Linux**, through our UP Community.


UP has a standard **industrial PC operating temperature** range of **32-140°F/0-60°C**, which makes it flexible for many applications.

UP is perfect for professional makers.

UP - Applications



Drones

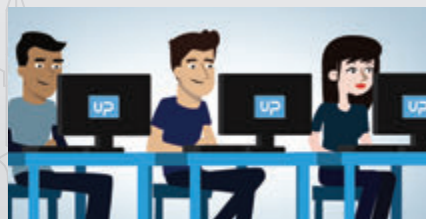

Education



Robotics






















Media Center




Internet of Things



Home Automation

        	<p>SOC Intel® Atom™ x5-Z8350 Processor (2M Cache, 1.44 GHz up to 1.92 GHz) CPU with 64 bit architecture; Quad Core</p> <p>Graphics Intel® HD 400 Graphics ,12 EU GEN 8, up to 500MHz Support DX*11.1/12, Open GL*4.2, Open CL*1.2 OGL ES3.0, H.264, HEVC(decode), VP8</p> <p>Video & Audio HDMI 1.4b I2S audio port</p> <p>Camera interface CSI (4 Mega pixel)</p> <p>USB 2.0 4x UB2.0 2x USB 2.0 pin header (10 pins in total)</p> <p>RTC Yes</p> <p>Power 5V DC-in @ 4A 5.5/2.1mm jack</p> <p>Dimensions 3.37" x 2.22" / 85.60 mm x 56.5 mm</p> <p>Operating humidity 10%~80%RH non-condensing</p>	         	<p>Memory 1GB / 2GB / 4GB DDR3L-1600</p> <p>Storage Capacity 16GB eMMC / 32 GB / 64 GB eMMC</p> <p>Display interface DSI / eDP</p> <p>Ethernet 1x Gb Ethernet (full speed) RJ-45</p> <p>USB 3.0 1x UB3.0 OTG</p> <p>Expansion 40 pin General Purpose bus, supported by Altera Max V. ADC 8-bit@188ksos</p> <p>Compatible Operating system Microsoft Windows 10 full version Linux (ublinux, Ubuntu, Yocto) • Android Marshmallow</p> <p>Operating Temperature 32-140°F / 0-60°C</p> <p>Certificate CE/FCC Class A, RoHS complaint Microsoft Azure certified, REACH</p>
---	---	---	---

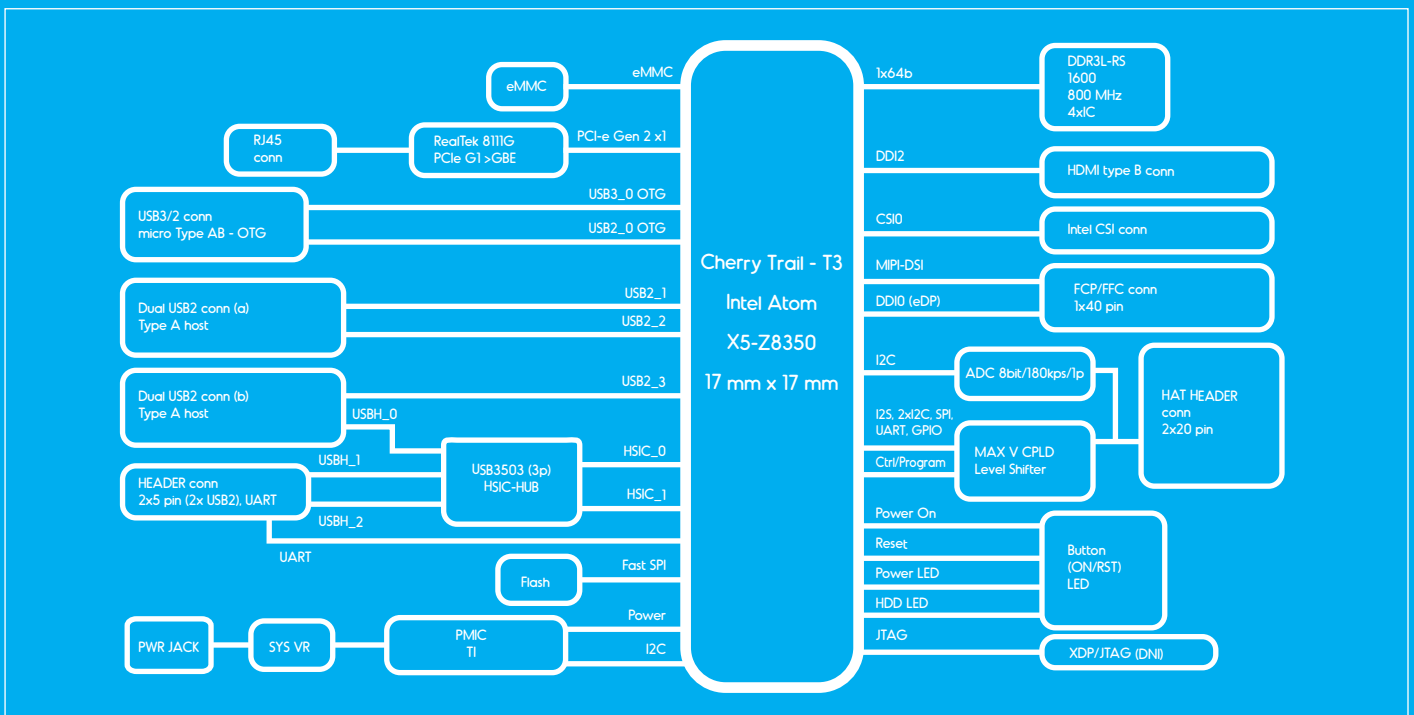

UP - Pinout



1 3V3	2 5V	3 GPIO0/I2C_SDA	4 5V	5 GPIO1/I2C1_SCL
6 Ground	7 GPIO2/ADC-input	8 GPIO15/UART_TX	9 Ground	10 GPIO16/UART_RX
11 GPIO3	12 GPIO17/I2S_CLK	13 GPIO4	14 Ground	15 GPIO5
16 GPIO18	17 3V3	18 GPIO19	19 GPIO6/SPI_MOSI	20 Ground
21 GPIO7/SPI_MISO	22 GPIO20	23 GPIO8/SPI_CLK	24 GPIO21/SPI_CS0N	25 Ground
26 GPIO22/SPI_CS1N	27 GPIO9/I2C0_SDA	28 GPIO23/I2C0_SCL	29 GPIO10	30 Ground
31 GPIO11	32 GPIO24/PWM0	33 GPIO12/PWM1	34 Ground	35 GPIO13/I2S_FRM
36 GPIO25	37 GPIO14	38 GPIO26/I2S_DATAIN	39 Ground	40 GPIO27/I2S_DATAOUT

<p>Part number :</p> <p>UP-CHT01-A10-0116</p> <p>UP-CHT01-A10-0216</p> <p>UP-CHT01-A10-0232</p>	<p>1GB RAM+16GB eMMC</p> <p>2GB RAM+16GB eMMC</p> <p>2GB RAM+32GB eMMC</p>	<p>UP-CHT01-A10-0432</p> <p>UP-CHT01-A10-0464</p>	<p>4GB RAM+32GB eMMC</p> <p>4GB RAM+64GB eMMC</p>	<p>Included accessories</p> <p>Optional accessories</p>	<p>Heatsink/RTC battery</p> <p>Power adapter</p> <p>USB3.0 OTG cable</p> <p>HDMI cable</p>
---	--	---	---	---	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [AmITX-SL-G-Q170](#) [MVME61006E-2173R](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI](#) [UPN-EHLX4E-A10-0432](#) [UPN-EHLX4RE-A10-0864](#) [PCE-4129G2-00B2E](#) [81004-0000-99-1](#) [S26361-F5000-J004](#) [BPI-M2S\(AMLOGIC S922X\)](#) [BPI-M2S\(AMLOGIC A311D\)](#) [ROCK 4C+ PREMIUM KIT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [1996](#) [AIMB-223G2-S0A1E](#) [AIMB-562VG-GRA1E](#) [MIO-2263JH-U0A1E](#) [MIO-5270DZ-2GS0A1E](#) [MIO-5251JZ2-2GA1E](#) [PCE-5126QVG-00A1E](#) [PCE-5125QG2-00A1E](#) [MIO-5251E-S3A1E](#) [MIO-2261Z-2GS6A1E](#) [MIO-5270DZ22GS0A1E](#) [PCE-7127G2-00A1E](#) [AIMB-230G2-U0A1E](#) [MIO-2263EZ22GS3A1E](#) [SIMB-M22-2G2S0A1E](#) [ASMB-823I-00A1E](#) [MIO-5251J-U0A1E](#) [AIMB-502WG2-00A1E](#) [BBB01-SC-505](#) [IMB-M43](#) [AmITX-BT-I-E3845](#) [UPS-APLC2-A10-0432](#) [PICO300VGA-N3710](#) [PICO300VGA-N3060](#)