

Features


- Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
- Onboard LPDDR4 Memory up to 8GB
- Onboard eMMC Storage up to 128GB
- Gigabit LAN x 2, USB 2.0 x 2, USB 3.0 (Type A) x 3
- 5V DC-in, 4-6A
- 40 pin GPIO x 1
- DP/eDP/HDMI x 1
- MIPI-CSI (4-Lane & 2-Lane) x 1
- Mini-PCIe /M.2 2230 x 1
- SATA3 x 1
- 60pin EXHAT



Specifications


System	
Processor	Intel® Pentium® N4200/ Celeron® N3350/ Atom™ E3940/ E3950 Processor SoC
Graphics	Intel® Gen 9 HD, supporting 4K Codec Decode and Encode for HEVC4, H.264, VP8
I/O	HDMI x 1 DP x 1 I2S Audio Port
Camera	CSI 2-Lane + CSI 4-Lane
USB	USB 2.0 x 2 USB3.0 OTG x 1 USB3.0 (Type A) x 3
Expansion	40 pin GPIO x 1 Full-sized Mini-PCIe x 1 (PCIe & SATA + USB2.0) M.2 2230 x 1 SATA3 x 1 60 pin EXHAT x 1
RTC	Yes
Power	5V DC-in @ 4A-6A
Dimension	3.37" x 3.54" (85.6 mm x 90 mm)
Memory	2GB (single channel) LPDDR4 4GB/8GB (dual channel) LPDDR4
Storage	eMMC 32 GB / 64 GB / 128 GB
Display Interface	eDP
Ethernet	Gb Ethernet (full speed) RJ-45 x 2
OS Support	Microsoft Windows 10 (full), Windows IOT Core, Linux (ublinux, Ubuntu, Yocto), Android Nougat
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Operation Humidity	0% ~ 90% relative humidity, non-condensing
Certification	CE/FCC Class A, RoHS Compliant, REACH

Block Diagram

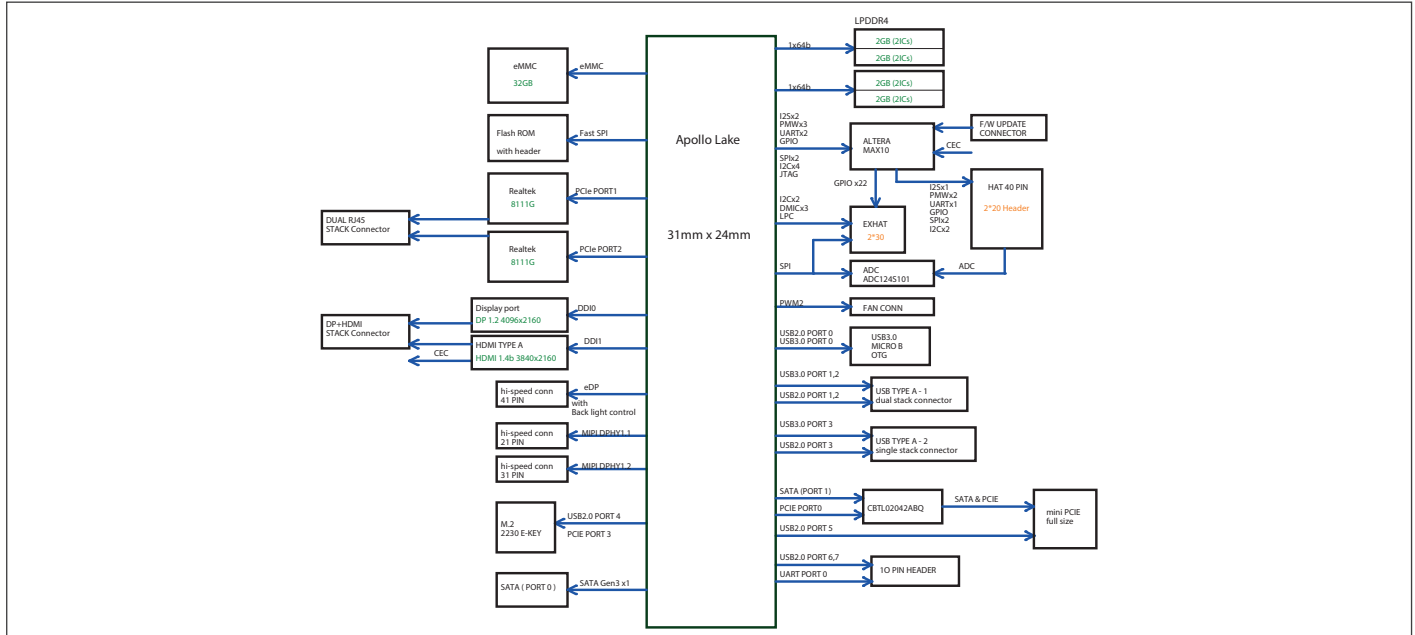

Dimension

Unit: mm

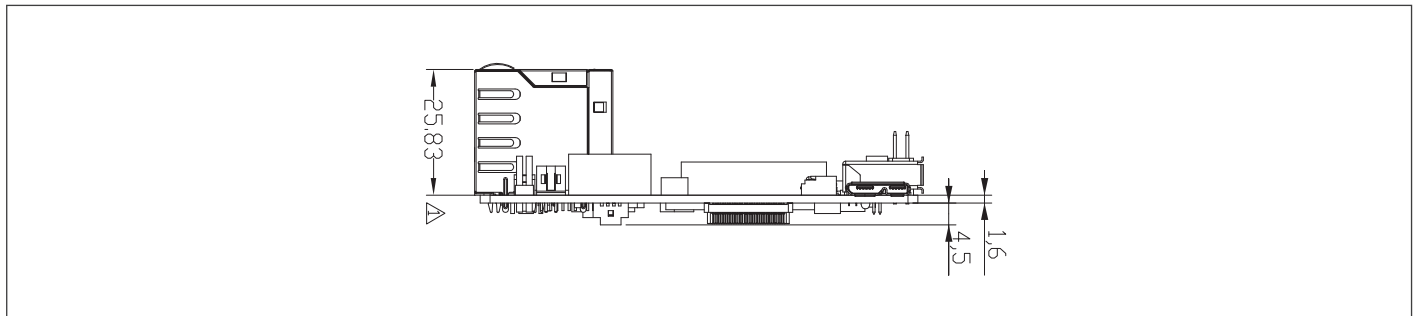

Ordering Information

Part number	Description
UPS-APLC2F-A20-0232	UP ² (UP Squared) board with Intel® Celeron® Dual Core N3350(F1) up to 2.4GHz, on board 2GB DDR4, 32GB eMMC
UPS-APLC2F-A20-0432	UP ² (UP Squared) board with Intel® Celeron® Dual Core N3350(F1) up to 2.4GHz, on board 4GB DDR4, 32GB eMMC
UPS-APLP4F-A20-0432	UP ² (UP Squared) board with Intel® Pentium® N4200(F1) Quad Core up to 2.5 GHz, on board 4GB DDR4, 32GB eMMC
UPS-APLP4F-A20-0864	UP ² (UP Squared) board with Intel® Pentium® N4200(F1) Quad Core up to 2.5 GHz, on board 8GB DDR4, 64GB eMMC
UPS-APLP4F-A20-08128	UP ² (UP Squared) board with Intel® Pentium® N4200(F1) Quad Core up to 2.5 GHz, on board 8GB DDR4, 128GB eMMC
UPS-APLX5F-A20-0432	UP ² (UP Squared) board with Intel® Atom™ E3940(F1),4G memory 32GeMMC.Rev.1.0
UPS-APLX7F-A20-0464	UP ² (UP Squared) board with Intel® Atom™ E3950(F1),4G memory 64GeMMC.Rev.1.0
UPS-APLX7F-A20-0864	UP ² (UP Squared) board with Intel® Atom™ E3950(F1),8G memory 64GeMMC.Rev.1.0

Packing List

- UPS-APL with Heatsink

Optional Accessories

- 1702020910
Power cord for EU
- 1702020911
Power cord for US
- 1255300362
30W.5VDC/6A power adapter
- PER-TAICX-A10-001
AI Core X mPCIe card.with 30 mm heat sink
- PER-TAICX-A10-002
AI Core X mPCIe card.with 15 mm heat sink with FAN

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Aaeon](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [102110541](#) [102110540](#) [UPN-EHLX4E-A10-0432](#) [BTR3-1](#) [PCE-4129G2-00B2E](#) [81004-0000-99-1](#) [S26361-F5000-J004](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#)
[IB811F-I50](#) [BBBLUE](#) [IB811F-I30](#) [DFR0546](#) [M2M \(TELIT\)](#) [RELAY PROFESSIONAL](#) [GLS11.2.053.2.2.E](#)
[SLS16Y2_792C_512R_SD_1WB_C_B](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [A64-OLINUXINO-1GS16M](#) [BANANA PI BPI-W2](#)
[T2-OLINUXINO-LIME2-S16M-IND](#)