



AAVID CLIP ATTACH E-SERIES

Introducing Aavid's line of clip attach heat sinks for BGA applications. The series utilizes an easy to mount plastic frame along with flexible wire springs. The wire springs are resistant to breakage and allow for easy installation. They provide pressure to improve thermal contact.

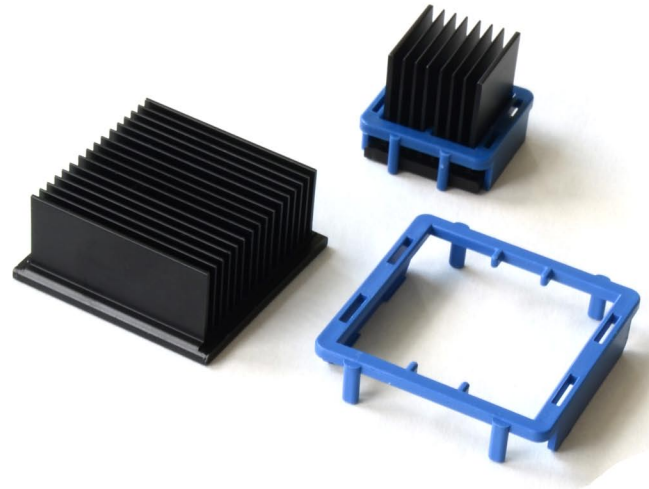

FEATURES & BENEFITS

- » 2.5mm keep out zone for high density PCB layout
- » Force applied by flexible wire spring
- » No short-circuit concern from UL94V-0 rated PA66
- » Easy mounting
- » Re-workable
- » Shock & Vibration tested
- » Cost Effective

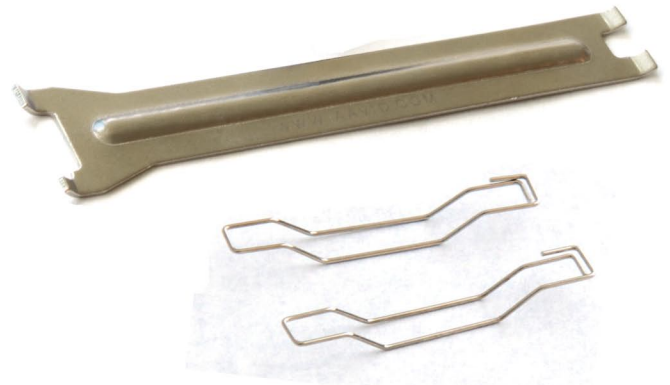


ORDERING INFORMATION

Customization is possible with different interface materials, finishes, and expanded heat sink size for smaller R_{ca} . The standard finish is black anodize.

Part Number Specification

	EA - XXX - HXXX - XXXX
Example Part:	EA 450 H175 T710
E-series	EA
Assembled	450
BGA Size (45mm x 45mm)	H175
Heat Sink Height (17.5mm)	T710
TIM Spec (T710)	T710

Keep Out Zones

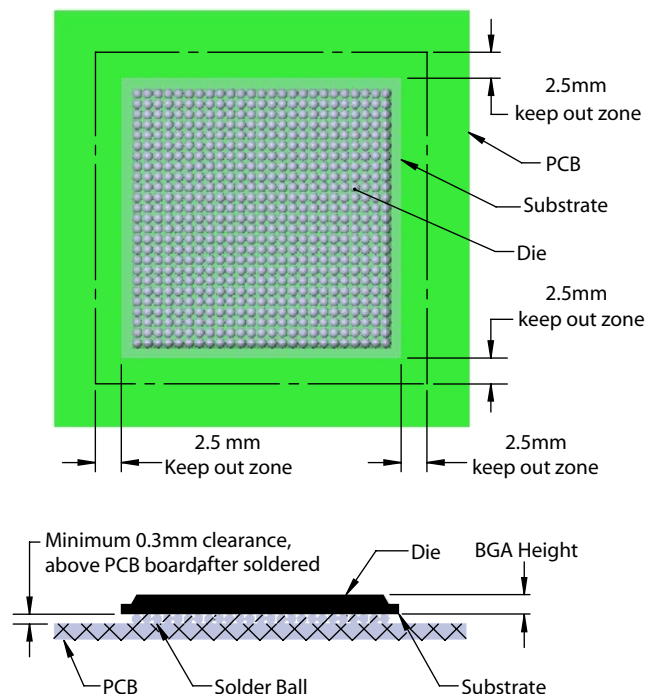



NOTE: Specifications are subject to change without notice

Clip attach mounting tool part number: **EA-MT001**



AAVID THERMALLOY

Aavid Clip Attach E-Series for BGAs

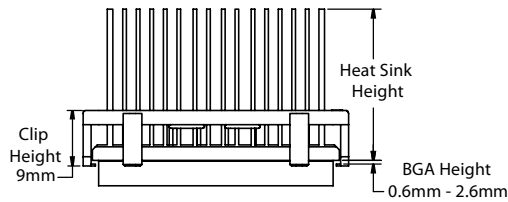

R_{ca} with Un-Ducted forced convection

- » Air direction: parallel to fin
- » Un-Ducted air region size: 3 times BGA nominal width; 1mm from fin top (i.e. 27x27mm BGA, region size 3x27mm = 81mm width)
- » Heat source size = BGA nominal size (i.e. 27x27mm BGA, heat source size 27x27mm)
- » TIM size: 1mm inward for 4 edges. (i.e. 27x27mm BGA, TIM size 25x25mm)

R_{ca} @ natural convection

- » Direction: fin perpendicular to ground
- » One value of R_{ca} at 75 °C temperature rise over ambient
- » Heat power (Watts): Adjusted to reach ΔT=75 °C balanced
- » Heat source size = BGA nominal size. (i.e. 27x27mm BGA, heat source size 27x27mm)
- » TIM size: 1mm inward for 4 edges. (i.e. 27x27mm BGA, TIM size 25x25mm)

Product Offerings

BGA Size (mm)	Description	BGA Height (mm)	Heat Sink Height (mm)	TIM	R _{ca} (°C/W) @ un-ducted air flow (m/s)						R _{ca} (°C/W) @ Natural Convection	R _{ca} (°C/W) @ Ducted Air Flow @ 1m/s	Weight (G, +/-10%)	
					0.5	1.0	1.5	2.0	2.5	3.0				4.0
19x19	EA-190-H095-T710	0.6 - 2.6	9.5	T710	29.5	17.8	13.6	11.3	9.9	8.9	7.6	66.4	10.1	5
	EA-190-H125-T710	0.6 - 2.6	12.5	T710	22.5	13.4	10.2	8.6	7.6	6.8	5.9	54.8	8.3	5
	EA-190-H145-T710	0.6 - 2.6	14.5	T710	19.7	11.6	8.9	7.5	6.6	6.0	5.1	50.8	7.7	6
	EA-190-H175-T710	0.6 - 2.6	17.5	T710	16.6	9.8	7.5	6.4	5.6	5.1	4.5	45.2	6.8	6
	EA-190-H195-T710	0.6 - 2.6	19.5	T710	15.1	8.8	6.9	5.8	5.2	4.7	4.0	42.6	6.3	6
	EA-190-H225-T710	0.6 - 2.6	22.5	T710	13.3	7.8	6.1	5.2	4.6	4.2	3.7	38.9	5.7	7
21x21	EA-190-H245-T710	0.6 - 2.6	24.5	T710	12.4	7.3	5.7	4.9	4.3	4.0	3.5	36.8	5.4	7
	EA-210-H095-T710	0.6 - 2.6	9.5	T710	25.6	15.1	11.2	9.3	8.0	7.2	6.1	62.3	8.2	5
	EA-210-H125-T710	0.6 - 2.6	12.5	T710	19.6	11.3	8.5	7.0	6.1	5.5	4.7	51.6	6.7	6
	EA-210-H145-T710	0.6 - 2.6	14.5	T710	17.1	9.8	7.4	6.1	5.4	4.8	4.1	47.4	6.2	6
	EA-210-H175-T710	0.6 - 2.6	17.5	T710	14.5	8.3	6.2	5.2	4.5	4.1	3.6	42.3	5.4	7
	EA-210-H195-T710	0.6 - 2.6	19.5	T710	13.2	7.5	5.6	4.7	4.2	3.8	3.2	39.6	5.0	7
23x23	EA-210-H225-T710	0.6 - 2.6	22.5	T710	11.7	6.6	5.0	4.2	3.7	3.4	3.0	36.1	4.5	8
	EA-210-H245-T710	0.6 - 2.6	24.5	T710	10.9	6.2	4.7	4.0	3.5	3.2	2.8	34.2	4.3	8
	EA-230-H095-T710	0.6 - 2.6	9.5	T710	23.3	13.4	9.9	8.1	7.0	6.2	5.2	58.4	7.0	7
	EA-230-H125-T710	0.6 - 2.6	12.5	T710	17.9	10.1	7.4	6.1	5.3	4.7	4.0	48.5	5.8	8
	EA-230-H145-T710	0.6 - 2.6	14.5	T710	15.7	8.7	6.4	5.3	4.6	4.2	3.5	44.2	5.3	9
	EA-230-H175-T710	0.6 - 2.6	17.5	T710	13.3	7.4	5.4	4.5	3.9	3.5	3.0	39.5	4.6	10
25x25	EA-230-H195-T710	0.6 - 2.6	19.5	T710	12.2	6.7	4.9	4.1	3.6	3.2	2.8	36.8	4.3	10
	EA-230-H225-T710	0.6 - 2.6	22.5	T710	10.8	5.9	4.4	3.6	3.2	2.9	2.5	33.6	3.9	11
	EA-230-H245-T710	0.6 - 2.6	24.5	T710	10.1	5.5	4.1	3.4	3.0	2.7	2.4	31.9	3.7	12
	EA-250-H095-T710	0.6 - 2.6	9.5	T710	21.6	12.3	8.9	7.3	6.2	5.5	4.6	54.8	6.2	8
	EA-250-H125-T710	0.6 - 2.6	12.5	T710	16.7	9.2	6.7	5.4	4.7	4.2	3.5	45.5	5.1	9
	EA-250-H145-T710	0.6 - 2.6	14.5	T710	14.6	8.0	5.8	4.7	4.1	3.7	3.1	41.3	4.7	9
27x27	EA-250-H175-T710	0.6 - 2.6	17.5	T710	12.5	6.7	4.9	4.0	3.5	3.1	2.7	36.9	4.1	10
	EA-250-H195-T710	0.6 - 2.6	19.5	T710	11.4	6.1	4.4	3.6	3.2	2.8	2.4	34.2	3.8	11
	EA-250-H225-T710	0.6 - 2.6	22.5	T710	10.1	5.4	3.9	3.2	2.8	2.6	2.2	31.2	3.4	12
	EA-250-H245-T710	0.6 - 2.6	24.5	T710	9.4	5.0	3.7	3.0	2.7	2.4	2.1	29.6	3.2	12
	EA-270-H095-T710	0.6 - 2.6	9.5	T710	20.4	11.4	8.2	6.6	5.6	5.0	4.1	51.4	5.6	9
	EA-270-H125-T710	0.6 - 2.6	12.5	T710	15.8	8.6	6.1	4.9	4.2	3.8	3.2	42.8	4.6	10
29x29	EA-270-H145-T710	0.6 - 2.6	14.5	T710	13.8	7.4	5.3	4.3	3.7	3.3	2.8	38.5	4.2	11
	EA-270-H175-T710	0.6 - 2.6	17.5	T710	11.8	6.2	4.5	3.6	3.1	2.8	2.4	34.5	3.6	12
	EA-270-H195-T710	0.6 - 2.6	19.5	T710	10.8	5.7	4.0	3.3	2.8	2.5	2.2	31.8	3.4	13
	EA-270-H225-T710	0.6 - 2.6	22.5	T710	9.6	5.0	3.6	2.9	2.5	2.3	2.0	29.0	3.0	14
	EA-270-H245-T710	0.6 - 2.6	24.5	T710	9.0	4.6	3.3	2.7	2.4	2.2	1.8	27.6	2.9	15
	EA-290-H095-T710	0.6 - 2.6	9.5	T710	19.4	10.7	7.6	6.1	5.1	4.5	3.8	48.2	5.1	10
29x29	EA-290-H125-T710	0.6 - 2.6	12.5	T710	15.0	8.0	5.7	4.5	3.9	3.4	2.9	40.2	4.2	11
	EA-290-H145-T710	0.6 - 2.6	14.5	T710	13.2	6.9	4.9	3.9	3.3	3.0	2.5	36.0	3.8	12
	EA-290-H175-T710	0.6 - 2.6	17.5	T710	11.3	5.8	4.1	3.3	2.8	2.5	2.1	32.2	3.3	14
	EA-290-H195-T710	0.6 - 2.6	19.5	T710	10.3	5.3	3.7	3.0	2.6	2.3	1.9	29.6	3.0	15
	EA-290-H225-T710	0.6 - 2.6	22.5	T710	9.2	4.7	3.3	2.7	2.3	2.1	1.8	27.0	2.7	16
	EA-290-H245-T710	0.6 - 2.6	24.5	T710	8.6	4.4	3.1	2.5	2.2	1.9	1.7	25.7	2.6	17

NOTE: Specifications are subject to change without notice




Product Offerings Continued

BGA Size (mm)	Description	BGA Height (mm)	Heat Sink Height (mm)	TIM	R_{ca} (°C/W) @ un-ducted air flow (m/s)							R_{ca} (°C/W) @ Natural Convection	R_{ca} (°C/W) @ Ducted Air Flow @ 1m/s	Weight (G, +/-10%)
					0.5	1.0	1.5	2.0	2.5	3.0	4.0			
30x30	EA-300-H095-T710	0.6 - 2.6	9.5	T710	18.5	10.0	7.1	5.6	4.7	4.2	3.4	45.2	4.7	11
	EA-300-H125-T710	0.6 - 2.6	12.5	T710	14.3	7.5	5.3	4.2	3.5	3.1	2.6	37.8	3.8	12
	EA-300-H145-T710	0.6 - 2.6	14.5	T710	12.6	6.5	4.5	3.6	3.1	2.7	2.3	33.6	3.4	13
	EA-300-H175-T710	0.6 - 2.6	17.5	T710	10.8	5.5	3.8	3.0	2.6	2.3	1.9	30.1	3.0	15
	EA-300-H195-T710	0.6 - 2.6	19.5	T710	9.9	4.9	3.4	2.8	2.4	2.1	1.8	27.5	2.8	16
	EA-300-H225-T710	0.6 - 2.6	22.5	T710	8.8	4.4	3.1	2.4	2.1	1.9	1.6	25.1	2.5	17
31x31	EA-310-H095-T710	0.6 - 2.6	9.5	T710	17.7	9.5	6.6	5.2	4.4	3.8	3.2	42.4	4.3	12
	EA-310-H125-T710	0.6 - 2.6	12.5	T710	13.8	7.1	4.9	3.9	3.3	2.9	2.4	35.5	3.5	14
	EA-310-H145-T710	0.6 - 2.6	14.5	T710	12.1	6.2	4.2	3.3	2.8	2.5	2.1	31.3	3.2	15
	EA-310-H175-T710	0.6 - 2.6	17.5	T710	10.4	5.2	3.6	2.8	2.4	2.1	1.8	28.1	2.7	17
	EA-310-H195-T710	0.6 - 2.6	19.5	T710	9.5	4.7	3.2	2.5	2.2	1.9	1.6	25.6	2.5	18
	EA-310-H225-T710	0.6 - 2.6	22.5	T710	8.5	4.2	2.8	2.2	1.9	1.7	1.4	23.3	2.3	19
32.5x32.5	EA-325-H095-T710	0.6 - 2.6	9.5	T710	17.1	9.0	6.2	4.9	4.1	3.6	2.9	39.8	4.0	14
	EA-325-H125-T710	0.6 - 2.6	12.5	T710	13.3	6.8	4.6	3.6	3.0	2.6	2.2	33.4	3.2	15
	EA-325-H145-T710	0.6 - 2.6	14.5	T710	11.7	5.9	4.0	3.1	2.6	2.3	1.9	29.2	2.9	17
	EA-325-H175-T710	0.6 - 2.6	17.5	T710	10.1	4.9	3.3	2.6	2.2	1.9	1.6	26.3	2.5	18
	EA-325-H195-T710	0.6 - 2.6	19.5	T710	9.2	4.5	3.0	2.4	2.0	1.7	1.5	23.8	2.3	20
	EA-325-H225-T710	0.6 - 2.6	22.5	T710	8.2	4.0	2.7	2.1	1.8	1.6	1.3	21.7	2.1	21
33x33	EA-330-H095-T710	0.6 - 2.6	9.5	T710	16.5	8.6	5.9	4.6	3.8	3.3	2.7	37.3	3.7	14
	EA-330-H125-T710	0.6 - 2.6	12.5	T710	12.8	6.5	4.3	3.4	2.8	2.4	2.0	31.4	3.0	15
	EA-330-H145-T710	0.6 - 2.6	14.5	T710	11.3	5.6	3.7	2.9	2.4	2.1	1.7	27.3	2.7	17
	EA-330-H175-T710	0.6 - 2.6	17.5	T710	9.8	4.7	3.1	2.4	2.0	1.8	1.5	24.5	2.3	18
	EA-330-H195-T710	0.6 - 2.6	19.5	T710	8.9	4.3	2.8	2.2	1.8	1.6	1.3	22.1	2.1	20
	EA-330-H225-T710	0.6 - 2.6	22.5	T710	8.0	3.8	2.5	1.9	1.6	1.4	1.2	20.2	1.9	21
35x35	EA-350-H095-T710	0.6 - 2.6	9.5	T710	15.9	8.2	5.5	4.3	3.5	3.1	2.5	35.0	3.4	15
	EA-350-H125-T710	0.6 - 2.6	12.5	T710	12.4	6.2	4.1	3.1	2.6	2.2	1.8	29.5	2.8	16
	EA-350-H145-T710	0.6 - 2.6	14.5	T710	11.0	5.3	3.5	2.7	2.2	2.0	1.6	25.5	2.5	18
	EA-350-H175-T710	0.6 - 2.6	17.5	T710	9.5	4.5	3.0	2.3	1.9	1.6	1.3	22.9	2.1	19
	EA-350-H195-T710	0.6 - 2.6	19.5	T710	8.7	4.1	2.7	2.0	1.7	1.5	1.2	20.5	2.0	21
	EA-350-H225-T710	0.6 - 2.6	22.5	T710	7.8	3.6	2.3	1.8	1.5	1.3	1.1	18.7	1.8	23
37.5x37.5	EA-375-H095-T710	0.6 - 2.6	9.5	T710	15.4	7.9	5.3	4.0	3.3	2.9	2.3	32.8	3.2	17
	EA-375-H125-T710	0.6 - 2.6	12.5	T710	12.1	5.9	3.9	2.9	2.4	2.1	1.7	27.7	2.6	20
	EA-375-H145-T710	0.6 - 2.6	14.5	T710	10.7	5.1	3.3	2.5	2.1	1.8	1.5	23.8	2.3	21
	EA-375-H175-T710	0.6 - 2.6	17.5	T710	9.2	4.3	2.8	2.1	1.7	1.5	1.2	21.4	1.9	24
	EA-375-H195-T710	0.6 - 2.6	19.5	T710	8.5	3.9	2.5	1.9	1.6	1.4	1.1	19.1	1.8	25
	EA-375-H225-T710	0.6 - 2.6	22.5	T710	7.6	3.4	2.2	1.7	1.4	1.2	1.0	17.4	1.6	28
40x40	EA-400-H095-T710	0.6 - 2.6	9.5	T710	15.0	7.5	5.0	3.8	3.1	2.7	2.1	30.8	3.0	20
	EA-400-H125-T710	0.6 - 2.6	12.5	T710	11.7	5.7	3.7	2.8	2.2	1.9	1.6	26.1	2.4	23
	EA-400-H145-T710	0.6 - 2.6	14.5	T710	10.4	4.9	3.2	2.4	1.9	1.7	1.3	22.2	2.1	25
	EA-400-H175-T710	0.6 - 2.6	17.5	T710	9.0	4.1	2.6	2.0	1.6	1.4	1.1	20.0	1.8	28
	EA-400-H195-T710	0.6 - 2.6	19.5	T710	8.2	3.8	2.4	1.8	1.4	1.2	1.0	17.7	1.7	30
	EA-400-H225-T710	0.6 - 2.6	22.5	T710	7.4	3.3	2.1	1.6	1.3	1.1	0.9	16.2	1.5	33
42.5x42.5	EA-425-H095-T710	0.6 - 2.6	9.5	T710	14.6	7.3	4.7	3.6	2.9	2.5	2.0	28.9	2.8	22
	EA-425-H125-T710	0.6 - 2.6	12.5	T710	11.4	5.4	3.5	2.6	2.1	1.8	1.4	24.5	2.2	25
	EA-425-H145-T710	0.6 - 2.6	14.5	T710	10.1	4.7	3.0	2.2	1.8	1.5	1.2	20.7	1.9	27
	EA-425-H175-T710	0.6 - 2.6	17.5	T710	8.8	4.0	2.5	1.8	1.5	1.3	1.0	18.7	1.6	30
	EA-425-H195-T710	0.6 - 2.6	19.5	T710	8.0	3.6	2.2	1.7	1.3	1.1	1.0	16.5	1.5	33
	EA-425-H225-T710	0.6 - 2.6	22.5	T710	7.2	3.2	2.0	1.4	1.2	1.0	0.8	15.0	1.4	36
45x45	EA-450-H095-T710	0.6 - 2.6	9.5	T710	14.2	7.0	4.5	3.4	2.7	2.3	1.8	27.1	2.6	24
	EA-450-H125-T710	0.6 - 2.6	12.5	T710	11.1	5.2	3.3	2.4	2.0	1.7	1.3	23.0	2.1	27
	EA-450-H145-T710	0.6 - 2.6	14.5	T710	9.9	4.5	2.8	2.1	1.7	1.4	1.1	19.3	1.8	29
	EA-450-H175-T710	0.6 - 2.6	17.5	T710	8.5	3.8	2.4	1.7	1.4	1.2	0.9	17.5	1.5	33
	EA-450-H195-T710	0.6 - 2.6	19.5	T710	7.9	3.5	2.1	1.6	1.2	1.0	0.9	15.3	1.4	35
	EA-450-H225-T710	0.6 - 2.6	22.5	T710	7.0	3.1	1.9	1.4	1.1	1.0	0.8	14.0	1.2	38
EA-450-H245-T710	0.6 - 2.6	24.5	T710	6.6	2.8	1.7	1.2	1.0	0.9	0.7	13.4	1.2	40	


NOTE: Specifications are subject to change without notice

Mounting Instructions


1. Snap plastic tab under one side of BGA substrate edge, beside solder balls.



2. Rotate another side to touch BGA. Make sure guiding rods align with BGA edge. Insert mounting tool.

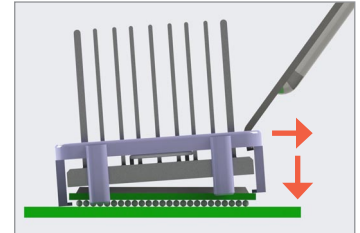

3. Close when mounting tool has opened opposite side tab. Make sure all tabs engage edges of BGA substrate.




The 2 side tabs on the plastic frame should align with the PCB.


Heat sink should be attached to the BGA/PCB firmly and not rotate or move easily.

Removal Instructions

1. Insert mounting tool from one side. Carefully open and lift from the same side.





2. Slide out of opposite side, then lift plastic clip (attached to whole assembly) from the PCB.



Legend

Spring already assembled inside before shipping

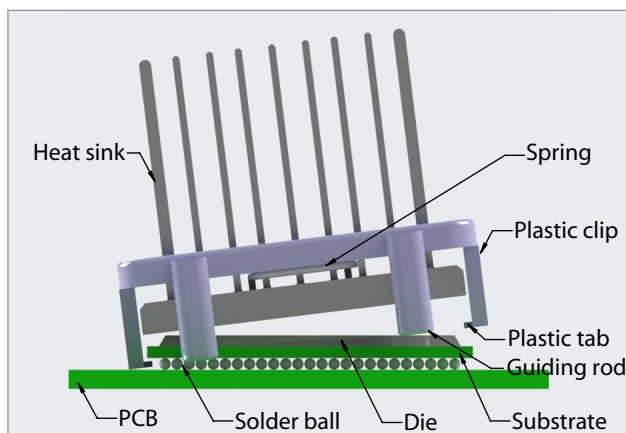

Global Presence with Local Support

Aavid supports product development cycles with dedicated engineering resources and distribution partners that deliver on time, anywhere in the world.

North America
USA
+1-603-528-3400
info@aavid.com

Europe
Italy
+39 051 764011
sales.eu@aavid.com

Asia
China
+86-21-6115-2000
sales.china@aavid.com

WWW.AAVID.COM

NOTE: Specifications are subject to change without notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Sinks](#) category:

Click to view products by [Aavid](#) manufacturer:

Other Similar products are found below :

[657-20ABPNE](#) [73452PPBA](#) [A22-4026](#) [120-1873-007](#) [218-40CTE3](#) [231-69PAB-15V](#) [231-75PAB-13V](#) [231-75PAB-15V](#) [253-122ABE-22](#)
[PSC22CB](#) [295-2](#) [CLP212SG](#) [D10100-28](#) [BDN183CBA01](#) [3-21053-4](#) [TX0506-1B](#) [LAE66A3CB](#) [511-3U](#) [73381PPBA](#) [73403PPBA](#) [8191-](#)
[E40](#) [510-12M](#) [529802B00000](#) [D10650-40T5](#) [6225B-MT6G](#) [ATS-54310K-C2-R0](#) [648-51AB](#) [657-20ABPESC](#) [679-25AG](#) [FK 212 CB SA](#)
[FK225 SA L1](#) [241404B91203G](#) [6801G](#) [680-5K](#) [7106DG/TR](#) [SK145 37 5STSTO220](#) [7109DG/TR](#) [TS-11042-CY](#) [S14K35G3S5](#) [8924G](#)
[7717-133DAP](#) [7717-26DAP](#) [4509](#) [SW25-4G](#) [CLP-215](#) [CLP-207](#) [D20850-40-T2](#) [APF30-30-10CB/A01](#) [V8508E](#) [268-85CTE](#)