



# 5SDD 11T2800

Old part no. DV 827C-1100-28

## Rectifier Diode

### Properties

- Industry standard housing
- Suitable for parallel operation
- High operating temperature
- Low forward voltage drop

### Key Parameters

|            |   |        |    |
|------------|---|--------|----|
| $V_{RRM}$  | = | 2 800  | V  |
| $I_{FAVm}$ | = | 1 285  | A  |
| $I_{FSM}$  | = | 15 000 | A  |
| $V_{TO}$   | = | 0.933  | V  |
| $r_T$      | = | 0.242  | mΩ |

### Types

|                     |   |
|---------------------|---|
|                     | $V_{RRM}$   |
| <b>5SDD 11T2800</b> | <b>2 800 V</b>  |
| Conditions:         | $T_j = -40 \div 160 \text{ }^\circ\text{C}$ ,<br>half sine waveform,<br>$f = 50 \text{ Hz}$ |

### Mechanical Data

|       |                           |                       |
|-------|---------------------------|-----------------------|
| $F_m$ | Mounting force            | $10 \pm 2 \text{ kN}$ |
| $m$   | Weight                    | <b>0.20 kg</b>        |
| $D_s$ | Surface creepage distance | <b>20 mm</b>          |
| $D_a$ | Air strike distance       | <b>14 mm</b>          |

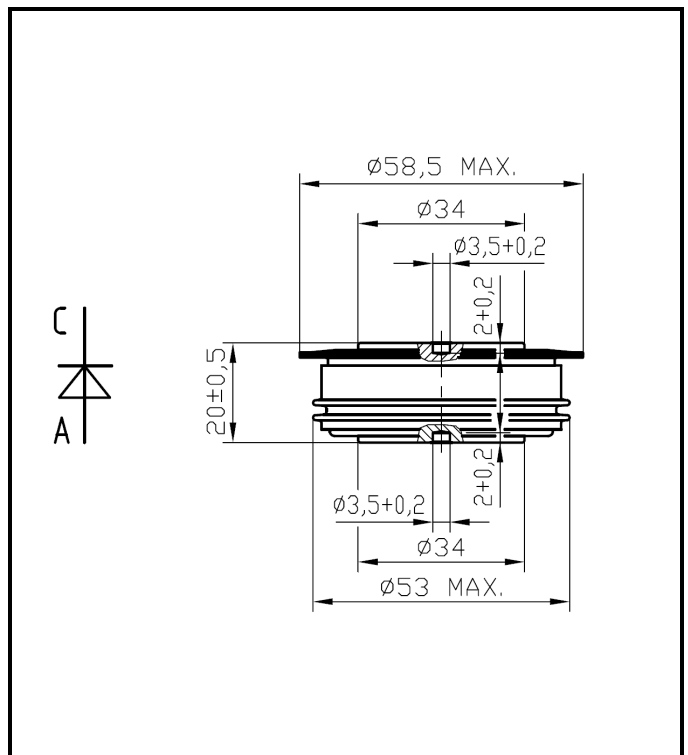


Fig. 1 Case



ABB s.r.o.

Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

tel.: +420 261 306 250, <http://www.abb.com/semiconductors>

| Maximum Ratings       |   | Maximum Limits                   | Unit                               |                       |
|-----------------------|---|----------------------------------|------------------------------------|-----------------------|
| $V_{RRM}$             | <b>Repetitive peak reverse voltage</b><br>$T_j = -40 \div 160 \text{ }^\circ\text{C}$ | <b>2 800</b>                     | <b>V</b>                           |                       |
| $I_{FAVm}$            | <b>Average forward current</b><br>$T_c = 85 \text{ }^\circ\text{C}$                   | <b>1 285</b>                     | <b>A</b>                           |                       |
| $I_{FRMS}$            | <b>RMS forward current</b><br>$T_c = 85 \text{ }^\circ\text{C}$                       | <b>2 019</b>                     | <b>A</b>                           |                       |
| $I_{RRM}$             | <b>Repetitive reverse current</b><br>$V_R = V_{RRM}$                                  | <b>30</b>                        | <b>mA</b>                          |                       |
| $I_{FSM}$             | <b>Non repetitive peak surge current</b><br>$V_R = 0 \text{ V, half sine pulse}$      | $t_p = 8.3 \text{ ms}$           | <b>16 000</b>                      | <b>A</b>              |
|                       |   | $t_p = 10 \text{ ms}$            | <b>15 000</b>                      | <b>A</b>              |
| $\dot{I}t$            | <b>Limiting load integral</b><br>$V_R = 0 \text{ V, half sine pulse}$                 | $t_p = 8.3 \text{ ms}$           | <b>1 066 000</b>                   | <b>A<sup>2</sup>s</b> |
|                       |   | $t_p = 10 \text{ ms}$            | <b>1 125 000</b>                   | <b>A<sup>2</sup>s</b> |
| $T_{jmin} - T_{jmax}$ | <b>Operating temperature range</b>  | <b>-40 <math>\div</math> 160</b> | <b><math>^\circ\text{C}</math></b> |                       |
| $T_{STG}$             | <b>Storage temperature range</b>  | <b>-40 <math>\div</math> 160</b> | <b><math>^\circ\text{C}</math></b> |                       |

Unless otherwise specified  $T_j = 160 \text{ }^\circ\text{C}$

| Characteristics |  | Value |              |              | Unit                            |
|-----------------|--|-------|--------------|--------------|---------------------------------|
|                 |  | min   | typ          | max          |                                 |
| $V_{T0}$        | <b>Threshold voltage</b>   |       |              | <b>0.933</b> | <b>V</b>                        |
| $r_T$           | <b>Forward slope resistance</b><br>$I_{F1} = 1\,500 \text{ A, } I_{F2} = 4\,500 \text{ A;}$                      |       |              | <b>0.242</b> | <b>m<math>\Omega</math></b>     |
| $V_{FM}$        | <b>Maximum forward voltage</b><br>$I_{FM} = 1\,500 \text{ A}$  |       |              | <b>1.300</b> | <b>V</b>                        |
| $Q_{rr}$        | <b>Recovered charge</b><br>$V_R = 100 \text{ V, } I_{FM} = 1\,000 \text{ A, } di/dt = -30 \text{ A}/\mu\text{s}$ |       | <b>2 200</b> |              | <b><math>\mu\text{C}</math></b> |

Unless otherwise specified  $T_j = 160 \text{ }^\circ\text{C}$

| Thermal Parameters |                                     |                      | Value | Unit |
|--------------------|-------------------------------------|----------------------|-------|------|
| $R_{thjc}$         | Thermal resistance junction to case | double side cooling  | 32    | K/kW |
|                    |                                     | anode side cooling   | 50    |      |
|                    |                                     | cathode side cooling | 88    |      |
| $R_{thch}$         | Thermal resistance case to heatsink | double side cooling  | 8     | K/kW |
|                    |                                     | single side cooling  | 16    |      |

| Transient Thermal Impedance  |              |          |                   |          |                   |          |                  |          |  |  |  |  |  |
|--|--------------|----------|-------------------|----------|-------------------|----------|------------------|----------|--|--|--|--|--|
| Analytical function for transient thermal impedance<br><br>$Z_{thjc} = \sum_{i=1}^5 R_i (1 - \exp(-t / \tau_i))$   | $i$          | 1        | 2                 | 3        | 4                 | 5        |                  |          |  |  |  |  |  |
|  | $\tau_i$ (s) | 0.7033   | 0.2185            | 0.0588   | 0.0042            | 0.0006   |                  |          |  |  |  |  |  |
|  | $R_i$ (K/kW) | 11.56    | 10.08             | 7.84     | 2.38              | 0.13     |                  |          |  |  |  |  |  |
| Conditions:<br>$F_m = 10 \pm 2$ kN, Double side cooled<br><br>Correction for periodic waveforms  |              |          |                   |          |                   |          |                  |          |  |  |  |  |  |
| <table border="1"> <tbody> <tr> <td>180° sine:</td> <td>2.3 K/kW</td> </tr> <tr> <td>180° rectangular:</td> <td>3.1 K/kW</td> </tr> <tr> <td>120° rectangular:</td> <td>5.1 K/kW</td> </tr> <tr> <td>60° rectangular:</td> <td>8.7 K/kW</td> </tr> </tbody> </table> | 180° sine:   | 2.3 K/kW | 180° rectangular: | 3.1 K/kW | 120° rectangular: | 5.1 K/kW | 60° rectangular: | 8.7 K/kW | Fig. 2 Dependence transient thermal impedance junction to case on square pulse |  |  |  |  |
| 180° sine:   | 2.3 K/kW     |          |                   |          |                   |          |                  |          |  |  |  |  |  |
| 180° rectangular:  | 3.1 K/kW     |          |                   |          |                   |          |                  |          |  |  |  |  |  |
| 120° rectangular:  | 5.1 K/kW     |          |                   |          |                   |          |                  |          |  |  |  |  |  |
| 60° rectangular:   | 8.7 K/kW     |          |                   |          |                   |          |                  |          |  |  |  |  |  |

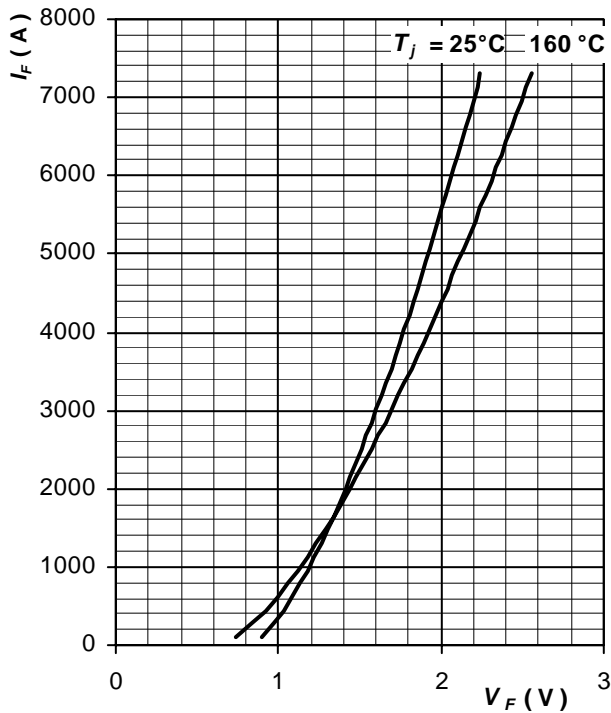


Fig. 3 Maximum forward voltage drop characteristics

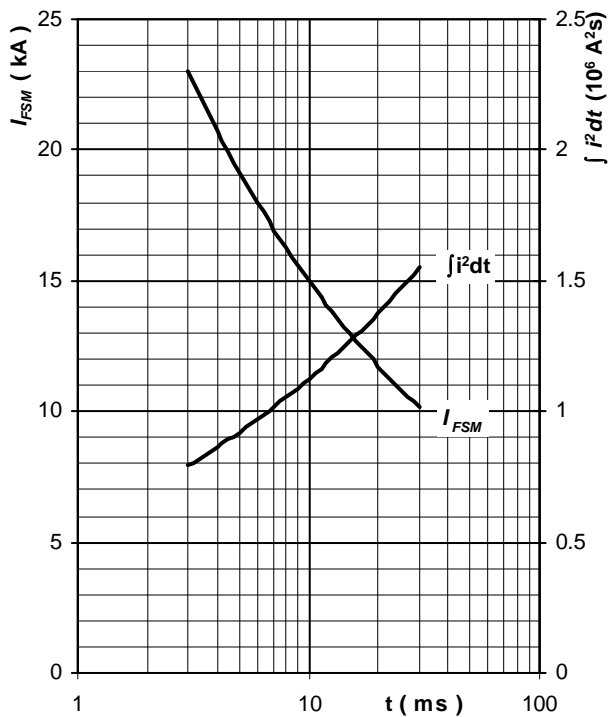


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse,  $T_j = T_{jmax}$

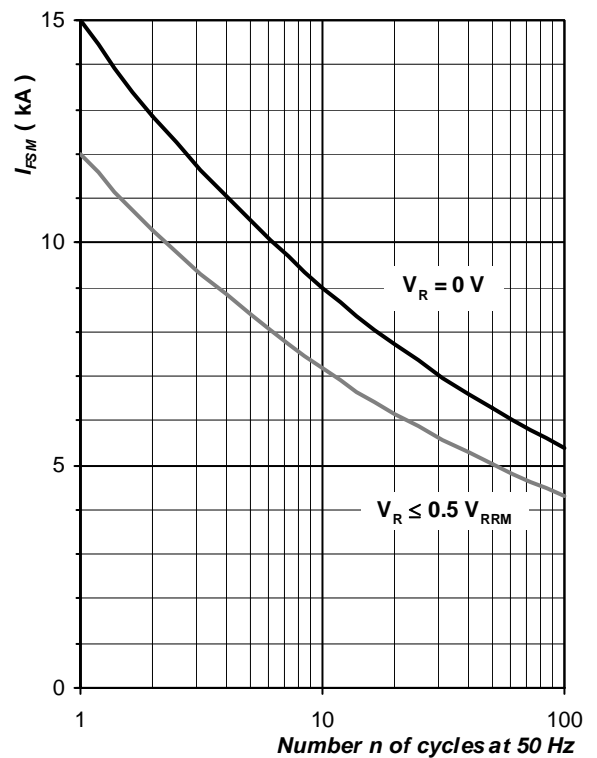


Fig. 5 Surge forward current vs. number of pulses, half sine wave,  $T_j = T_{jmax}$

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

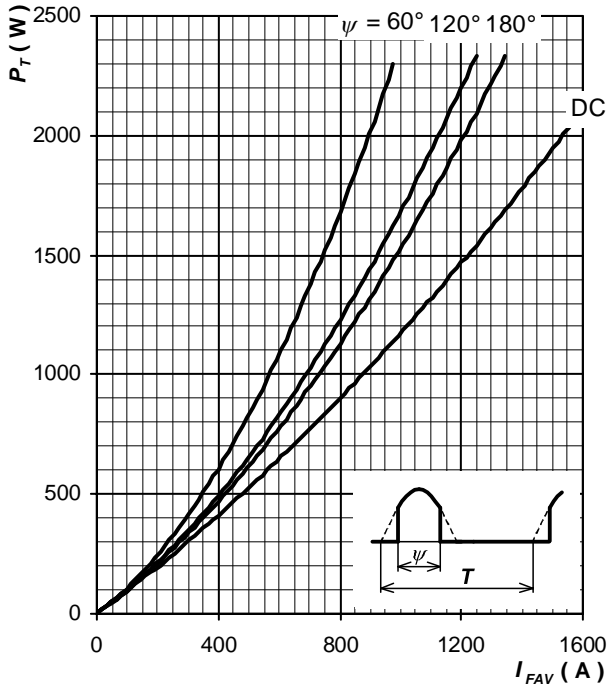


Fig. 6 Forward power loss vs. average forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

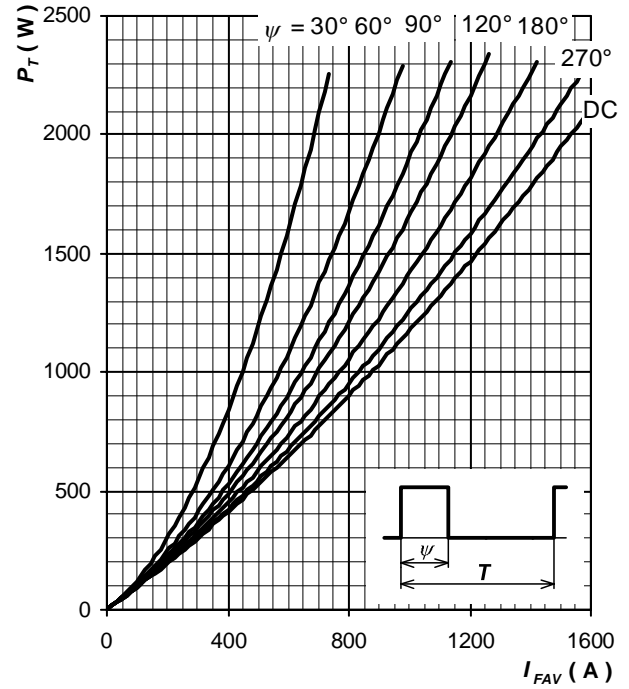


Fig. 7 Forward power loss vs. average forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

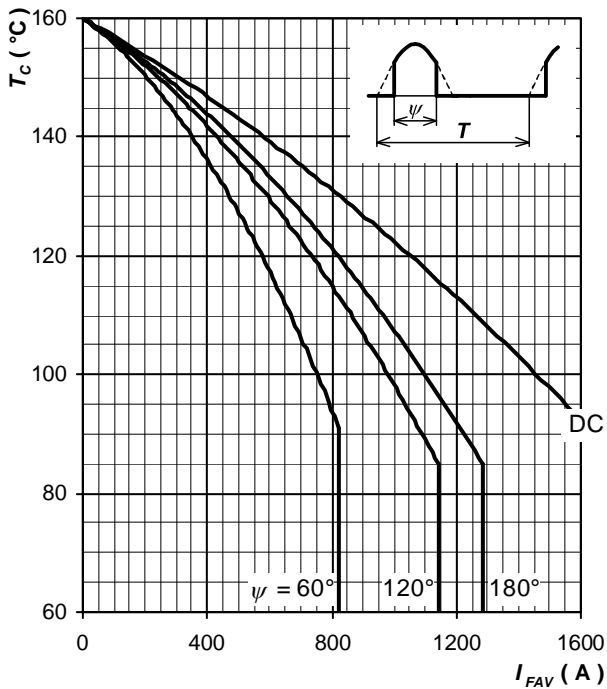


Fig. 8 Max. case temperature vs. aver. forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

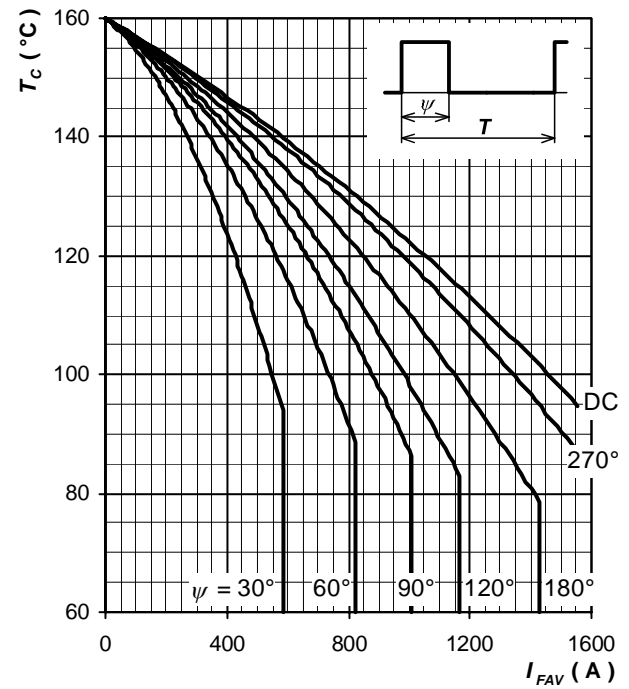


Fig. 9 Max. case temperature vs. aver. forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

Notes:

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [ABB](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#) [RRE02VS6SGTR](#) [067907F](#)  
[MS306](#) [70HF40](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#) [ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#)  
[ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#)  
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#)  
[NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#) [SKN20/08](#) [SKN300/16](#)