



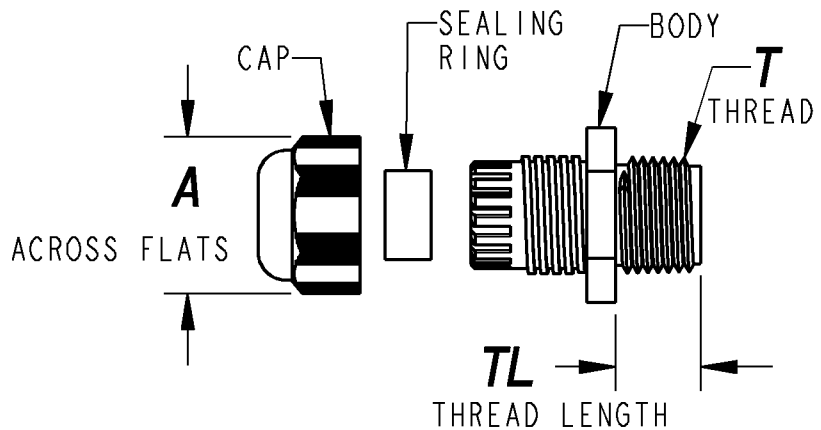

# T&B Portable Cord Fittings

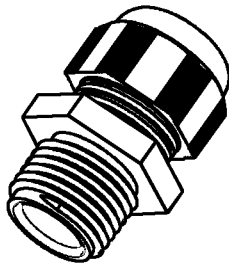

MATERIAL: BODY AND CAP- POLYANIDE 6  
 SEALING RING: NEOPRENE  
 COLOR: GRAY (RAL 7001)  
 BLACK (RAL 9005)  
 TEMPERATURE RANGE: -30°C TO 80°C PERMANENT  
 OPERATING TEMPERATURE: UP TO +150°C INTERMITTENT

SEE SHEET 2 FOR ADDITIONAL DATA & AGENCY CERTIFICATIONS.

CC-PG36-G	PG36
CC-PG29-G	PG29
CC-PG21-G	PG21
CC-PG16-G	PG16
CC-PG135-G	PG13.5
CC-PG11-G	PG11
CC-PG9-G	PG9
CC-PG7-G	PG7
<b>CATALOG NUMBER</b>	<b>SIZE</b>

CC-IS032-G	IS032
CC-IS025-G	IS025
CC-IS020-G	IS020
CC-IS016-G	IS016
<b>CATALOG NUMBER</b>	<b>SIZE</b>

CC-NPT1-B	1"
CC-NPT1-G	1"
CC-NPT34-B	3/4"
CC-NPT34-G	3/4"
CC-NPT12-B	1/2"
CC-NPT12-G	1/2"
CC-NPT38-B	3/8"
CC-NPT38-G	3/8"
<b>CATALOG NUMBER</b>	<b>SIZE</b>

<b>GENERAL NOTES</b>		<b>Thomas &amp; Betts</b> A Member of the ABB Group			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.					
<b>REVISIONS</b>		<b>DESCRIPTION: NON-METALLIC NPT THREAD CABLE GLAND</b>			
2	SEE ERN 2016115 FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: RM401887	ORIGINAL PROJECT NO / ( ERN NO ) <b>RM401810 / ( 2002527 )</b>	SHEET NO: <b>1 OF 2</b>	REV. NO: <b>2</b>	DRAWING NO: <b>WSD-000004</b>

CC-PG36-G	GRAY	1.260	.867	2.086	PG36	.512	UL, cCSAus	DRY LOCATION
CC-PG29-G	GRAY	.984	.709	1.653	PG29	.433	cULus, cCSAus	LIQUID-TIGHT
CC-PG21-G	GRAY	.709	.511	1.300	PG21	.433	UL, cCSAus	DRY LOCATION
CC-PG16-G	GRAY	.551	.394	1.063	PG16	.394	cULus, cCSAus	LIQUID-TIGHT
CC-PG135-G	GRAY	.473	.236	.945	PG13.5	.354	UL, cCSAus	DRY LOCATION
CC-PG11-G	GRAY	.394	.197	.866	PG11	.315	cURus, cCSAus	LIQUID-TIGHT
CC-PG9-G	GRAY	.315	.157	.748	PG9	.315	UR, cCSAus	DRY LOCATION
CC-PG7-G	GRAY	.256	.118	.590	PG7	.315	UR, cCSAus	DRY LOCATION
CC-ISO32-G	GRAY	.984	.709	1.653	ISO32	.590	cULus, cCSAus	LIQUID-TIGHT
CC-ISO25-G	GRAY	.709	.511	1.300	ISO25	.590	UL, cCSAus	LIQUID-TIGHT
CC-ISO20-G	GRAY	.473	.236	.945	ISO20	.394	UL, cCSAus	DRY LOCATION
CC-ISO16-G	GRAY	.394	.197	.866	ISO16	.394	cURus, cCSAus	LIQUID-TIGHT
CC-NPT1-B	BLACK	.984	.709	1.654	1-11 1/2 NPT	.790	cULus, cCSAus	LIQUID-TIGHT
CC-NPT1-G	GRAY	.984	.709	1.654	1-11 1/2 NPT	.790	cULus, cCSAus	LIQUID-TIGHT
CC-NPT34-B	BLACK	.709	.511	1.299	3/4-14 NPT	.590	UL, cCSAus	DRY LOCATION
CC-NPT34-G	GRAY	.709	.511	1.299	3/4-14 NPT	.590	UL, cCSAus	DRY LOCATION
CC-NPT12-B	BLACK	.551	.394	1.063	1/2-14 NPT	.590	cULus, cCSAus	DRY LOCATION
CC-NPT12-G	GRAY	.551	.394	1.063	1/2-14 NPT	.590	cULus, cCSAus	DRY LOCATION
CC-NPT38-B	BLACK	.394	.197	.866	3/8-18 NPT	.590	cULus, cCSAus	LIQUID-TIGHT
CC-NPT38-G	GRAY	.394	.197	.866	3/8-18 NPT	.590	cULus, cCSAus	LIQUID-TIGHT
CATALOG NUMBER	COLOR	MAXIMUM	MINIMUM	ACROSS FLATS	THREAD	THREAD LENGTH	AGENCY	CONDITIONS OF USE
		CLAMPING RANGE						

www.tnb.com		<b>Thomas &amp; Betts</b> A Member of the ABB Group	
DESCRIPTION: <b>NON-METALLIC NPT THREAD CABLE GLAND</b>			
	SHEET NO: <b>2 OF 2</b>	REV. NO: <b>2</b>	DRAWING NO: <b>WSD-000004</b>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Identification category](#):*

*Click to view products by [ABB manufacturer](#):*

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)  
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)  
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)  
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)  
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)  
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)