

LOW FREQUENCY, 32.768kHz CYLINDRICAL TYPE TUNING FORK CRYSTALS AB38T and AB26T



8.3 x Ø3.2 mm or 6.2 x Ø2.1 mm

FEATURES:


- Watch frequency.
- Frequency range from 30kHz to 200kHz.
- Excellent heat resistance.

APPLICATIONS:

- Real time clock.
- Measuring instruments.
- Clock source for communication or A/V equipment.


STANDARD SPECIFICATIONS

PARAMETERS	AB38T	AB26T
Frequency Range	32.768kHz	32.768kHz 30kHz to 200kHz
Operating Temperature	-10°C to +60°C (See Options)	
Storage Temperature	-40°C to +85°C	
Turnover Temperature	25°C to ±5°C	
Frequency Tolerance @ 25°C	±20ppm max.	±20ppm max.(32.768kHz) & ±30ppm max.(others)
Frequency Stability over Temp	-0.034 ±0.006ppm / (25-T) ² **	
Equivalent Series Resistance (ESR)	30kΩ max.	35kΩ max.(32.768kHz) 35kΩ ~ 50KΩ (others)
Shunt Capacitance C ₀	1.6pF typical	0.8 to 1.7pF typical
Load Capacitance C _L (See Note)	12.5pF typical (See Options)	
Motion Capacitance C ₁	0.0035pF typ.	0.001 ~ 0.004pF typ.
Drive Level	1μW max.	
Quality Factor Q	90,000 typical	70,000 typical
Capacitance Ratio C ₀ / C ₁	460 typical	425 - 800 typical
Insulation Resistance	500 MΩ min. at 100 Vdc ±15 V	
Aging @ 25°C First year	±3ppm max.	±3ppm (32.768kHz) ±5ppm (others)

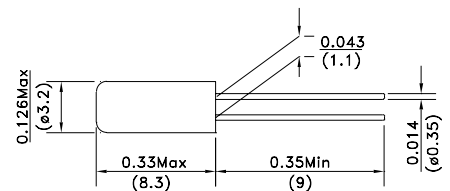

AB38T

Dimensions: Inches (mm)

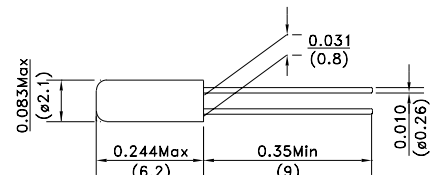

AB26T

Note : Custom C_L upon request at 6 pF. Check with us for other C_L value.

** Example: Stability at -20°C is: -0.035 x [25-(-20)]² = -71ppm.

Environmental, and mechanical specifications, see appendix C. Group 3.

Marking, see appendix G.

Recommended handling, see appendix F.

Application notes, see appendix A.

ORDERING OPTIONS

ABXXT - Frequency - CL - Temperature - Tolerance

38 or 26

Load cap. in pF
or
-S for Series


XX.XXXX kHz

-E for 0°C to +70°C
-B for -20°C to +70°C
-C for -30°C to +70°C
-N for -30°C to +85°C
-D for -40°C to +85°C

-1 for ± 10ppm*
-7 for ± 15ppm

* Please call for availability.

TYPICAL FREQUENCY -vs- TEMPERATURE CURVE

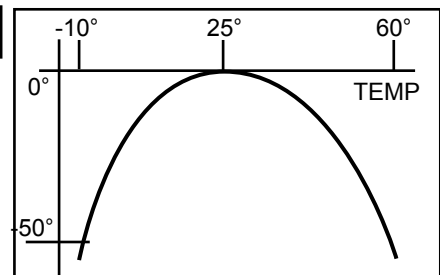

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA
(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com

ABRACON
CORPORATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS1V-T1K-32.768kHz-12.5pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [16875](#) [ECS-80-18-30B-JEM-TR](#) [ECS-100-10-30B-CKL-TR](#) [MS1V-T1K-32.768kHz-6pF-20PPM-TA-QC-Au](#)