

PECL/LVPECL HF VCXO

14.35 x 9.27 x 6.48 mm



Datasheet #0629J

Features

- Wide frequency range – 12.0MHz to 280.000MHz
- High Reliability- NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Ultra Low Phase Noise and Jitter
- High Shock Resistance, to 1000g
- No Multiplication
- Absolute Pull Range (APR) to ± 1000 ppm
- SONET ± 20 ppm overall free-run stability available

Applications

- Fiber Channel
- 10 GbE
- Infiniband
- Network Processors
- SONET/SDH
- COTS/Dual use

Absolute Maximum Ratings

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Operating Temperature Range	To		-40		+85	°C	
Storage Temperature Range	Tst		-50		+90	°C	
Supply Voltage	Vcc		-0.5		5.5	V	
Enable/Disable Voltage	Ven/dis		0		Vcc	V	

Electrical (1*)

Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes	
Nominal Frequency	Fo		12		280	MHz		
Supply Voltage	Vcc	Code 0 Code A	4.75 3.135	5.0 3.3	5.25 3.465	V		
Supply Current	Icc			60	80	mA		
Output Logic Type				LVPECL				
Load		Output to Vcc-2V, or Thevenin Equivalent		50		Ohm		
Output Levels	Voh Vol	Overall	Vcc-1.025		Vcc -1.620	V		
Duty Cycle (Symmetry)		At 50 % of output voltage swing	45/55	50/50	55/45	%		
Rise /Fall Time	Tr/Tf	20 to 80, 80 to 20%		0.5	0.7	ns		
Jitter	Integrated	J	Integrated from Phase Noise, 12KHz to 20MHz, RMS			0.1	0.2	ps
			10Hz to 80KHz, RMS				1.0	ps
			50KHz to 80MHz			0.3		ps
	Wavecrest characterized	Random, period			2.5		ps	
		Accumul., pk-to-pk			17		ps	
	Deterministic			0		ps		
Phase Noise	$\mathcal{L}(\Delta f)$	155.52MHz	@10Hz @100Hz @1KHz @10KHz @100KHz @>1MHz		-75 -105 -128 -142 -147 -147	-70 -100 -125 -140 -145 -145	dBc/Hz	

PECL/LVPECL HF VCXO



ESD Sensitive

14.35 x 9.27 x 6.48 mm

Datasheet #0629J

Electrical (cont.)


Parameters	Symbol	Condition	Min	Typ	Max	Unit	Notes
Sub-harmonics			None			dBc	
Frequency Stability usually not specified unless necessary. APR is specified to incorporate stability	$\Delta F/F$	Overall, including temperature, aging 10 years, shock and vibration @ $V_c = V_{cc}/2$; APR 50ppm or less	± 20	± 30		ppm	
Control Voltage Range	V_c		0		V_{cc}	V	
Setability	V_{cs}	V_c to set F at F_0 ; T, V_{cc} , load – nominal as shipped	0.4 V_{cc}	0.5 V_{cc}	0.6 V_{cc}	V	
Absolute Pull Range	APR	Overall conditions, see part # creation	20, 32, 50, 100			ppm	
Input Impedance	Z_{in}	@ $F_{mod} < 100kHz$	50			KOhm	
Modulation Bandwidth		At $V_c = V_{cc}/2$, -3dB	20			KHz	
Enable		Pin 2 = Low, 0 to $V_{cc}-2.6V$ or floating	Enabled			V	Option L
		Pin 2 = High, $V_{cc}-0.5 V$ to V_{cc} or floating	Enabled			V	Option P
Disable		Pin 2 = High, $V_{cc}-0.5 V$ to V_{cc}	Disabled			V	Option L
		Pin 2 = Low, 0 to $V_{cc}-2.6 V$	Disabled			V	Option P

Environmental and Mechanical

Parameter	Description
Operating Temperature Range	see part # table
Mechanical Shock	Per MIL-STD-202, Method 213, Cond. A
Thermal Shock	Per MIL-STD-883, Method 1011, Cond. A
Vibration	Per MIL-STD-883, Method 2007, Cond. A
Hermetic seal	Leak rate less than 1×10^{-8} atm.cc/s of helium
Soldering conditions	See MAX reflow profile below; The device may be reflowed once. Reflowing upside down is not allowed. NO CLEAN assembly is recommended



Creating a Part Number

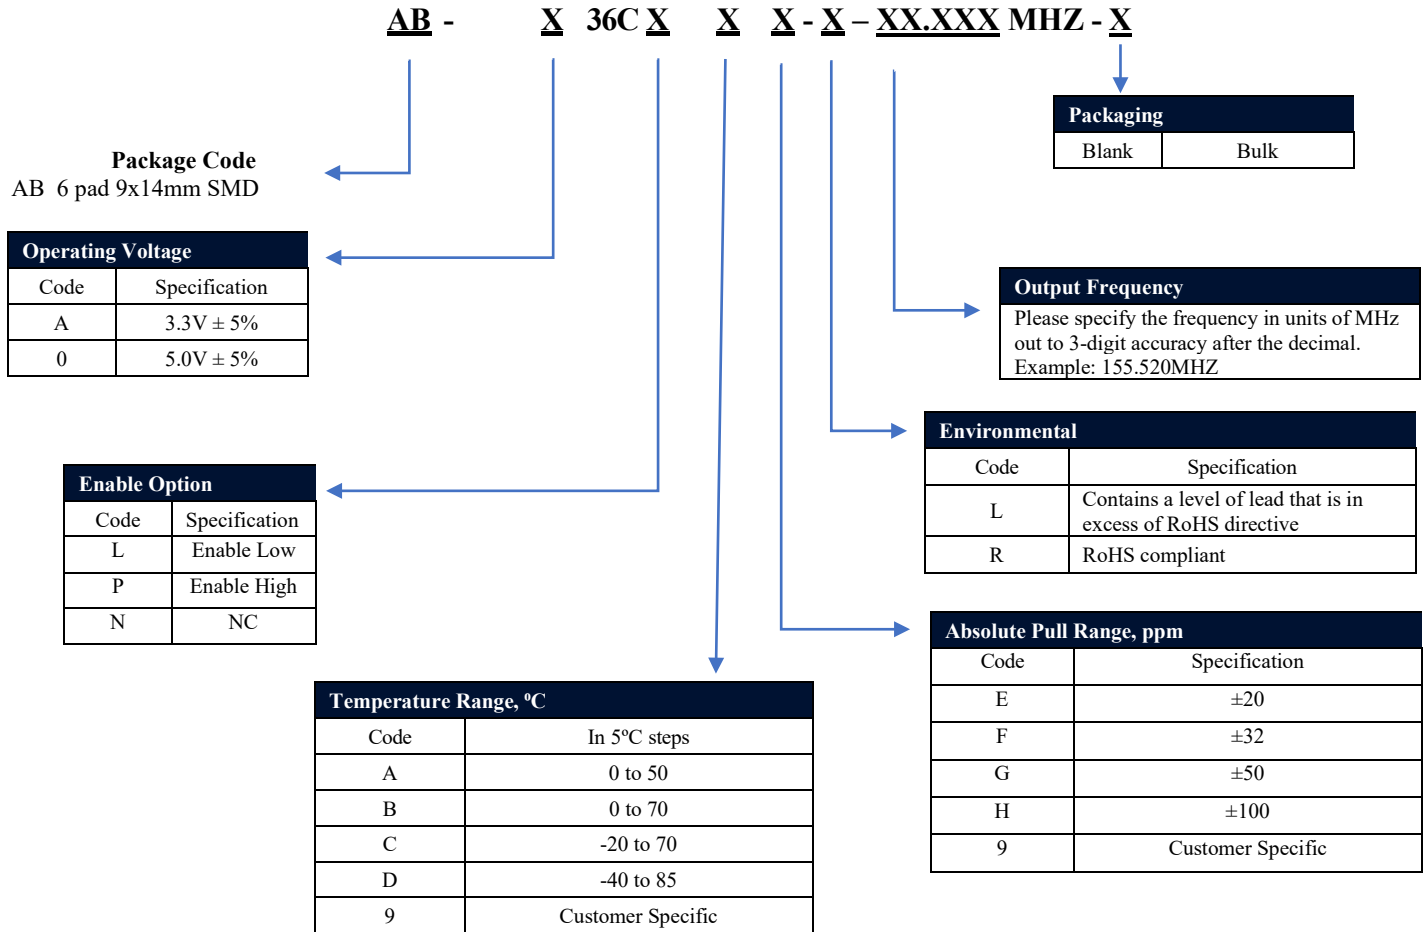

Not all combinations are available. Consult Factory.


Temperature Code Table

Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C	Letter	Temp °C
A	-40	F	-15	K	10	P	35	U	60	Z	85
B	-35	G	-10	L	15	Q	40	V	65		
C	-30	H	-5	M	20	R	45	W	70		
D	-25	I	0	N	25	S	50	X	75		
E	-20	J	5	O	30	T	55	Y	80		


Notes:

1* All parameters, unless otherwise specified, are at nominal conditions, ie: T=25°C, Nominal Vcc & Nominal Load.

Mechanical Dimensions

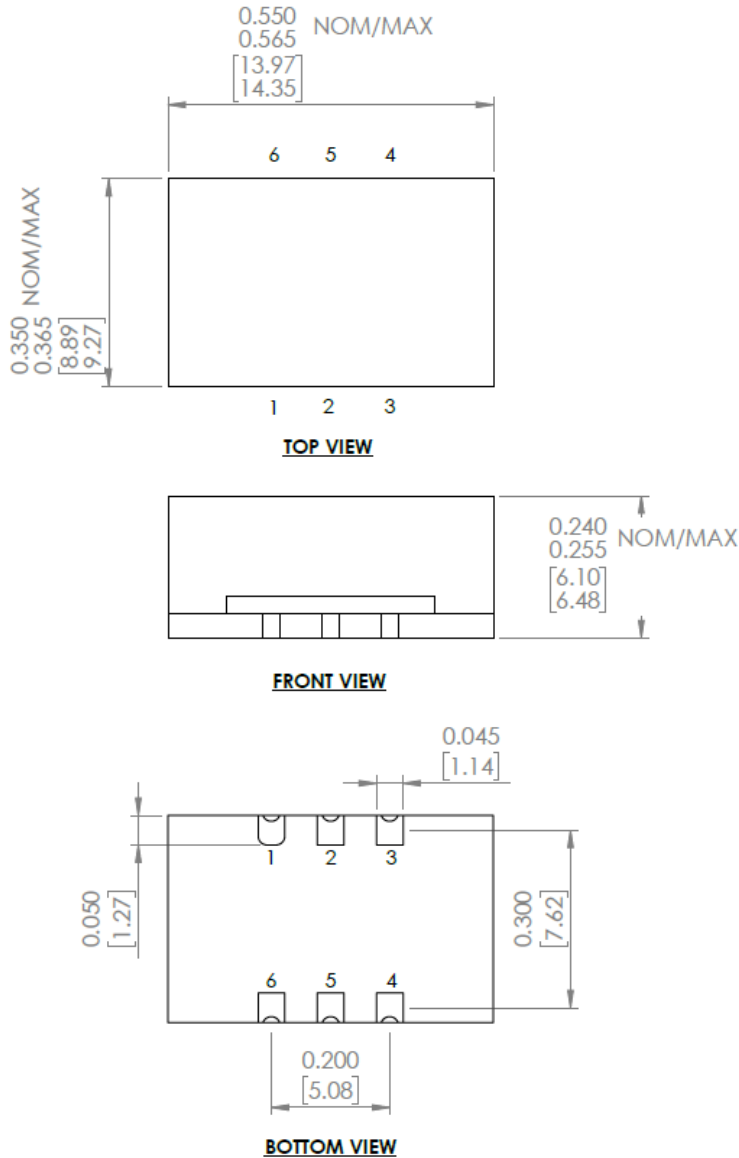

Recommended Land Pattern

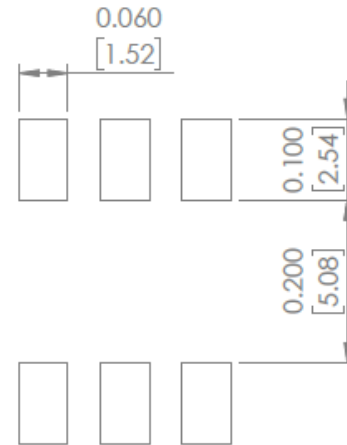

OUTLINE TOLERANCE:
 ±0.015 [0.40] (UNLESS OTHERWISE SPECIFIED)

Pin #	Function
1	V _{co}
2	ENABLE / DISABLE
3	GROUND
4	OUTPUT
5	OUTPUT COMPL.
6	V _{cc}

Dimensions: inches [mm]

Reflow Profile [JEDEC J-STD-020]

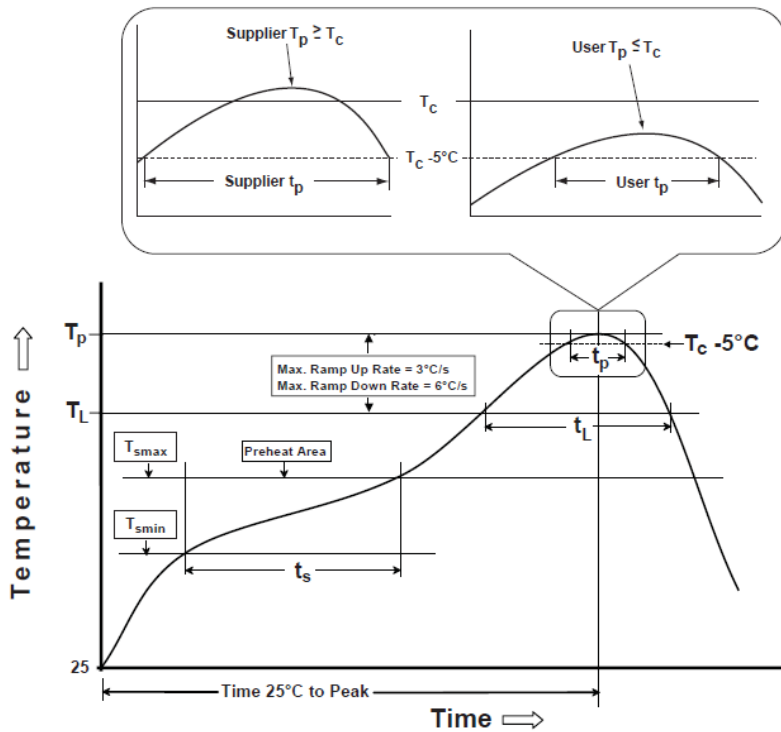


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)		
Package Thickness	Volume mm^3 <350	Volume mm^3 \geq 350
<2.5 mm	235°C	220°C
\geq 2.5 mm	220°C	220°C

Table 2

Pb-Free Process Classification Temperatures (T_c)			
Package Thickness	Volume mm^3 <350	Volume mm^3 350-2000	Volume mm^3 >2000
<1.6 mm	260°C	260°C	260°C
1.6 mm - 2.5 mm	260°C	250°C	245°C
>2.5 mm	250°C	245°C	245°C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	1 max	1 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [VCXO Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[3808AI-DF-33NG-80.0000](#) [SIT3808AI-CF-33EM-50.000000X](#) [FRSONT019](#) [SiT3701AC-43-33C-10.00000X](#) [315LB3I1250T](#) [CVPD-922X-100.000](#) [FY3HCJM45.1584-BULK](#) [SiT3807AC-C2-33EB-12.288000Y](#) [NBVSPA015LN1TAG](#) [NBVSPA015LNHTAG](#) [NBVSPA019LNHTAG](#) [NBVSPA024LN1TAG](#) [SX3V24.576B20100F30TNN](#) [SX3V16.384B2070F30TNN](#) [SX3V25.000B20100F30TNN](#) [NV0507DH3I155E030N100](#) [SX3V12.288B20070F30TNNS](#) [SX5V16.384B20100F30TNNS](#) [SX7V20.000B20100F30TNNS](#) [SX3V2.048B20070F30TNN](#) [SX7V10.000B20100F30TNNS](#) [SX7V25.000B20100F30TNNS](#) [SX7V49.152B20100F30TNNS](#) [SX3V49.152B20100F30TNNS](#) [SX7V45.1584B20100F30TNNS](#) [SX3V10.000B20070F30TNNS](#) [SX3V12.288B20070F30TNN](#) [SX5V10.000B20100F30TNNS](#) [SX7V16.384B20100F30TNNS](#) [SX5V12.288B20100F30TNNS](#) [SX7V19.440B20100F30TNNS](#) [SX5V49.152B20100F30TNNS](#) [SX3V45.1584B20100F30TNNS](#) [SX5V50.000B20100F30TNNS](#) [SX5V24.576B20100F30TNNS](#) [SX7V27.000B20100F30TNNS](#) [SX7V32.768B20100F30TNNS](#) [SX3V27.000B20100F30TNNS](#) [SX5V40.000B20100F30TNNS](#) [SX3V32.768B20100F30TNNS](#) [SX3V40.000B20100F30TNNS](#) [SX7V12.288B20100F30TNNS](#) [SX3V24.000B20085F30TNNS](#) [SX3V20.000B20085F30TNNS](#) [SX5V25.000B20100F30TNNS](#) [SX3V10.000B20070F30TNN](#) [SX3V16.384B20070F30TNNS](#) [SX3V19.440B20085F30TNNS](#) [SX5V20.000B20100F30TNNS](#) [SX3V24.576B20100F30TNNS](#)