


# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL



1.6 x 1.2 x 0.4mm

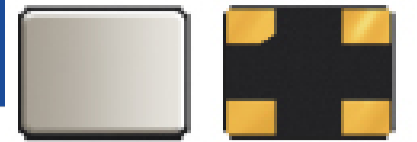

RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM12W SERIES

### FEATURES

- Optimized for energy saving wearables and IoT applications
- Plated at exceptionally low plating capacitance, as low as 4pF, with optimized ESR
- 0.4 mm max height ideally suited for height constrained designs
- Seam sealed for longterm reliability


### APPLICATIONS

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU
- Near Field Communication (NFC)
- ISM Band

### STANDARD SPECIFICATIONS

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	24.0000		52.0000	MHz	
Operation Mode	Fundamental				
Operating Temperature Range	-40		+125	°C	See options
Storage Temperature	-55		+125	°C	
Frequency Tolerance @ +25°C	-10		+10	ppm	See options
Frequency Stability over the Operating Temperature ( ref. to +25°C)	-10		+10	ppm	See options
Equivalent series resistance "R1" (over Operating Temperature Range) (CL=4pF)		< 90	150	Ω	24.0000 – 31.9999MHz
		< 80	100		32.0000 – 36.9999MHz
		< 60	80		37.0000 – 52.0000MHz
Equivalent series resistance "R1" (over Operating Temperature Range) (CL=6pF, 7pF, 8pF)		< 80	100	Ω	24.0000 – 31.9999MHz
		< 60	80		32.0000 – 36.9999MHz
		< 35	50		37.0000 – 52.0000MHz
Shunt capacitance (C0)		< 1.0	2.0	pF	
Load capacitance (CL)		4.0		pF	See options
Drive Level		10	100	μW	
Aging (1 year)	-2		+2	ppm	@ 25°C±3°C
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

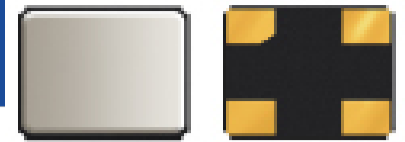

1.6 x 1.2 x 0.4mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM12W SERIES

### OPTIONS AND PART IDENTIFICATION (NOTE 1)

Note 1: Contact Abracon for part number requests with carrier frequency callouts up to 5 & 6 digit accuracy after the decimal.

ABM12W-  MHz -  -  -  -  -

**Frequency in MHz**  
Please specify the Frequency in MHz out to **4 digit** accuracy after the decimal.  
(e.g. 16.0000MHz)

Load Capacitance (pF)
8: 8pF
7: 7pF
6: 6pF
4: 4pF

**Custom ESR**  
if other than standard  
R □: Specify a value in Ω (e.g.: R70)

Packaging
Blank: Bulk
T3: 3kpcs / reel

Operating Temp.
I: 0°C ~ 50°C
E: 0°C ~ +70°C
B: -20°C ~ +70°C
C: -30°C ~ +70°C
N: -30°C ~ +85°C
D: -40°C ~ +85°C
J: -40°C ~ +105°C (*)
K: -40°C ~ +125°C (*)

Freq. Tolerance
1: ± 10 ppm
7: ± 15 ppm
2: ± 20 ppm
3: ± 25 ppm
4: ± 30 ppm
5: ± 50 ppm

Freq. Stability
U: ± 10 ppm (*)
G: ± 15 ppm (**)
X: ± 20 ppm (**)
W: ± 25 ppm (**)
Y: ± 30 ppm (**)
H: ± 35 ppm (**)
Z: ± 50 ppm
Q: ± 100 ppm

(\*) Only offered @ Freq. Stability options: Z & Q.


Contact ABRACON for tighter Frequency Stability.

(\*) Only offered @ Operating Temp. Range options: I, E, & B

(\*\*) Only offered @ Operating Temp. Range options: I, E, B, C, N, & D

Contact ABRACON for wider Operating Temp. Range.

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

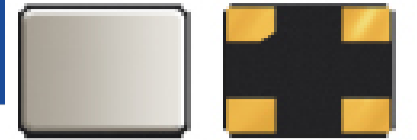

ABM12W SERIES



1.6 x 1.2 x 0.4mm





RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## TYPICAL FREQUENCY Vs. TEMPERATURE CHARACTERISTICS

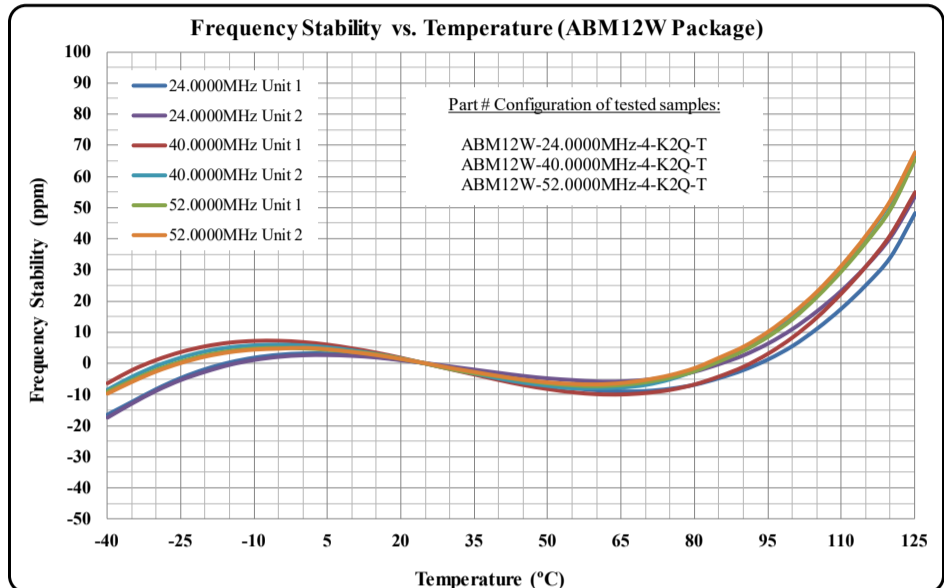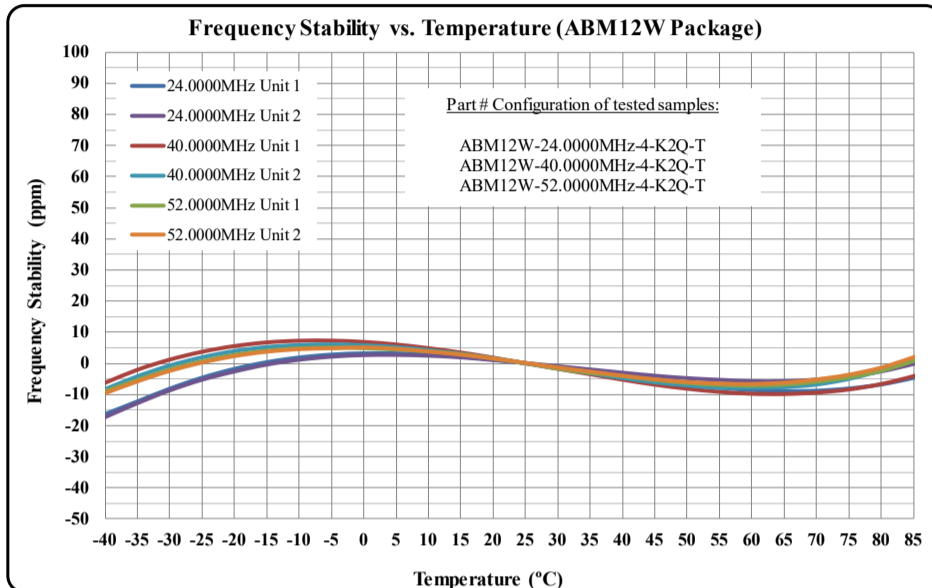

## TYPICAL ESR (EQUIVALENT SERIES RESISTANCE) VS. TEMPERATURE CHARACTERISTICS

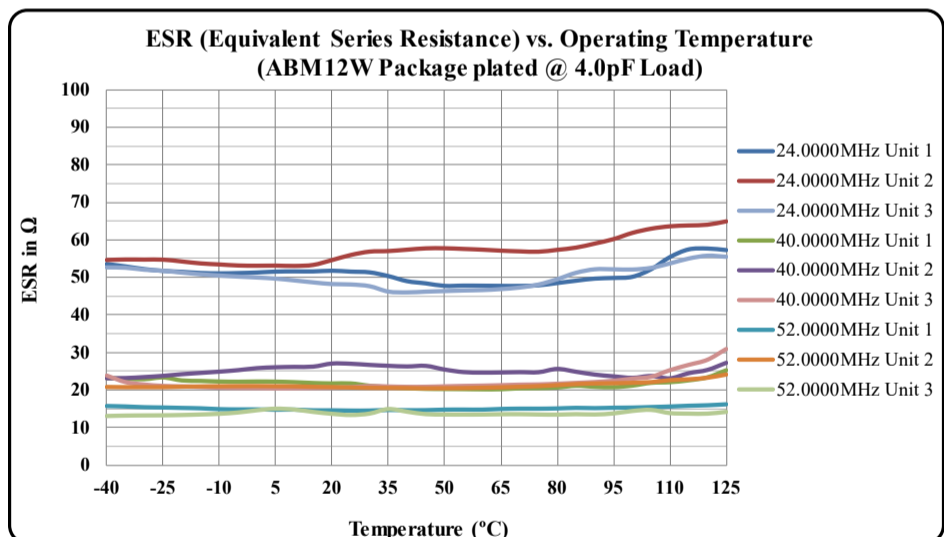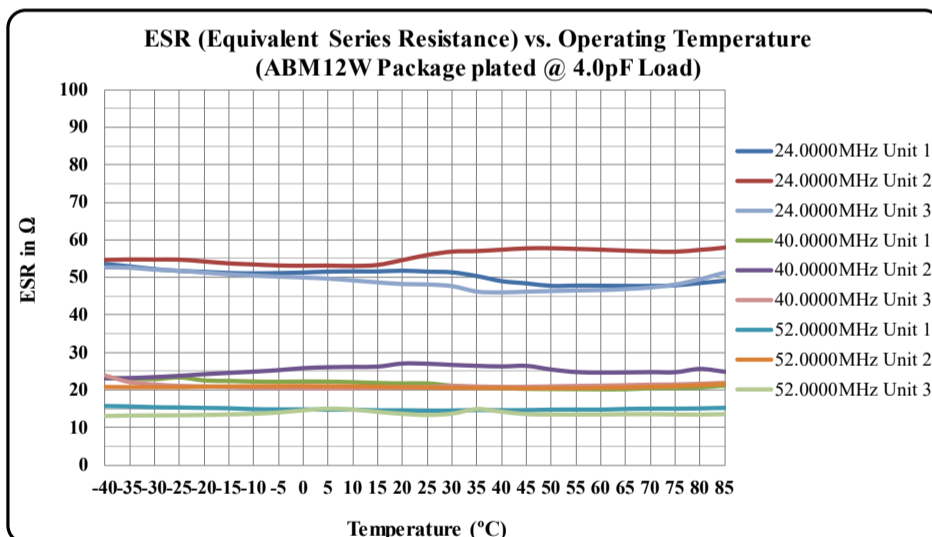

(\* ) Plating Load = Load Capacitance (CL)




5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 10.05.2020

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

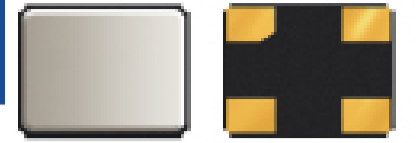

ABM12W SERIES


1.6 x 1.2 x 0.4mm






RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## TYPICAL FREQUENCY TOLERANCE DISTRIBUTION (AT 25°C ± 3°C)

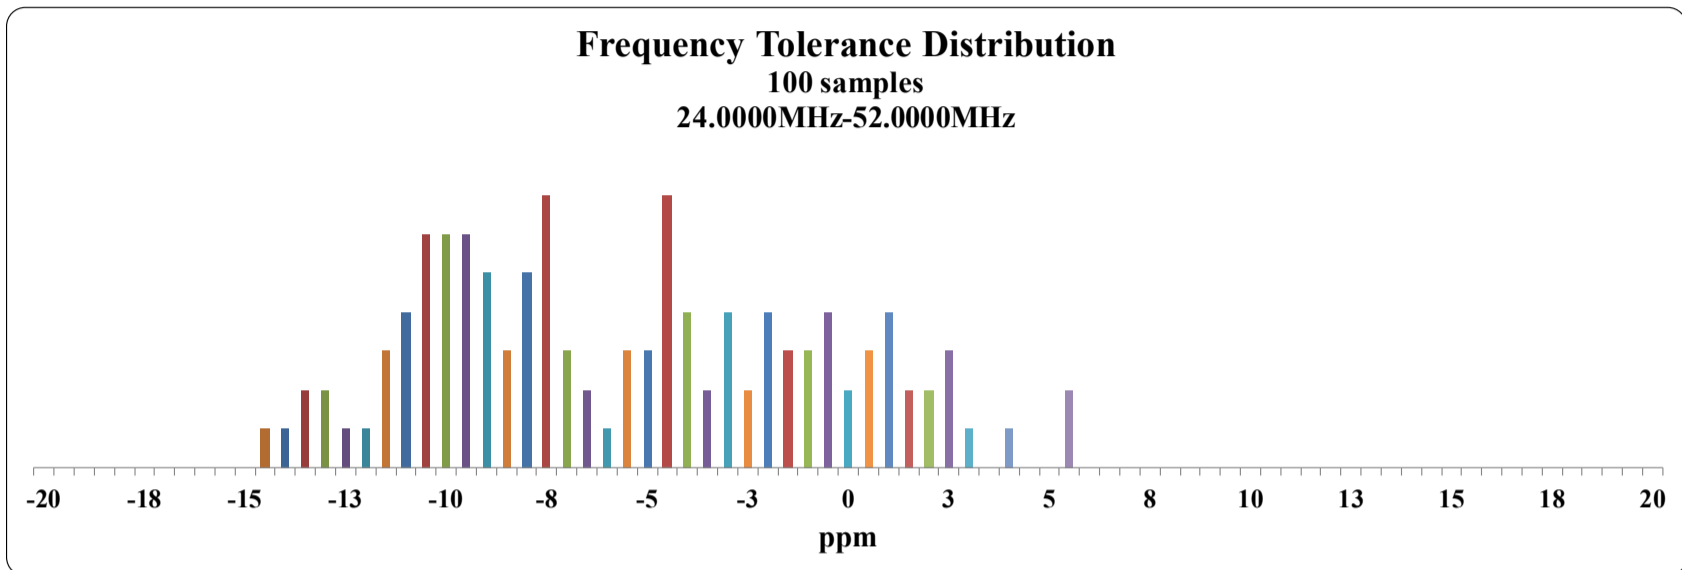

## TYPICAL ESR DISTRIBUTION (AT 25°C ± 3°C)

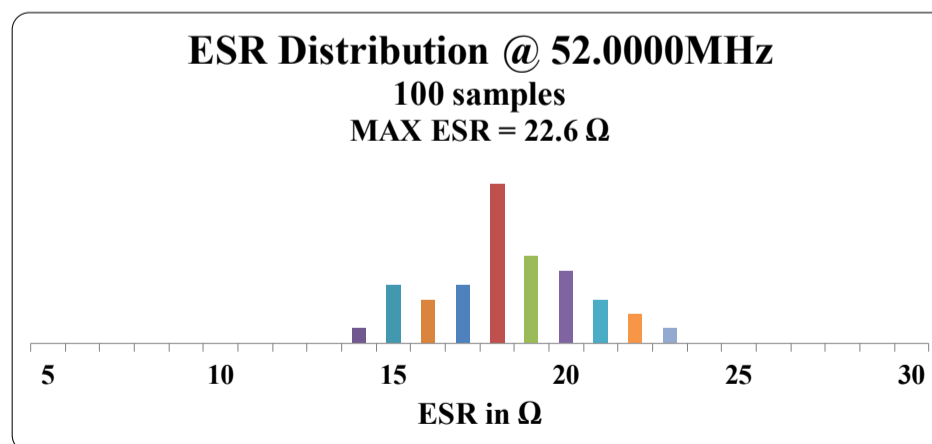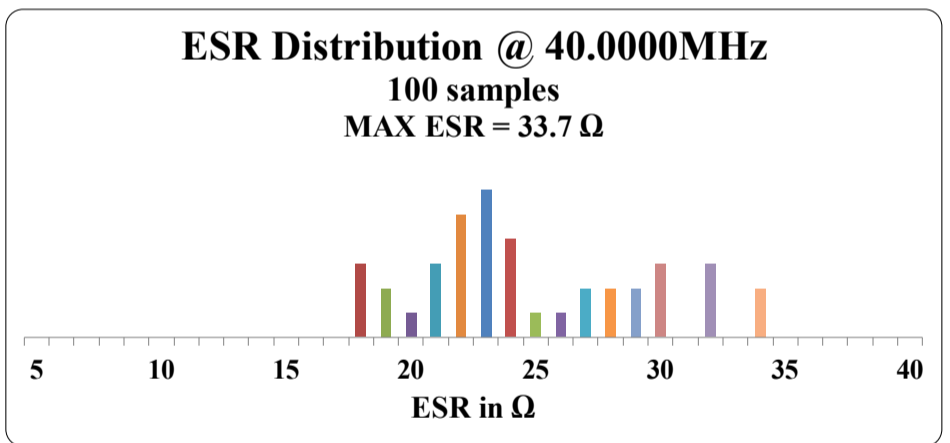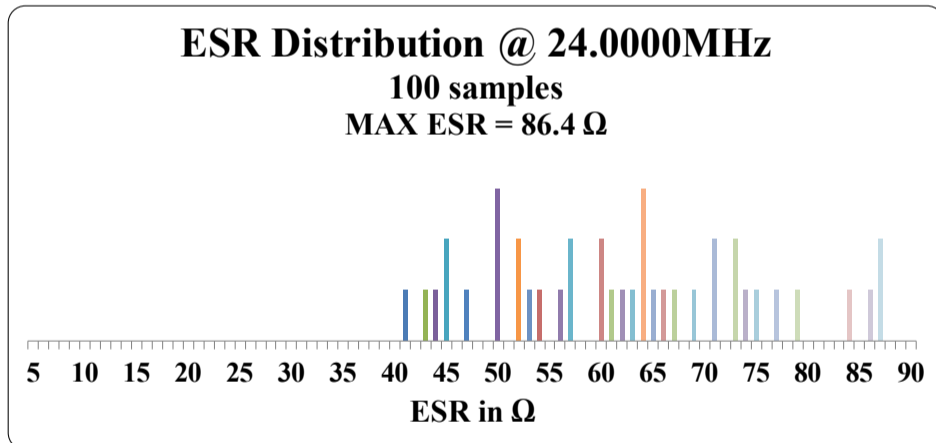

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

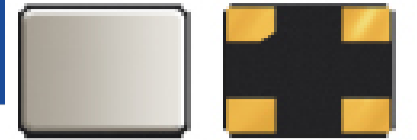

ABM12W SERIES


1.6 x 1.2 x 0.4mm



RoHS/RoHS II Compliant





MSL = N/A: NOT APPLICABLE

## SPICE MODELS (BASED ON TYPICAL VALUES AT 25°C ± 3°C)

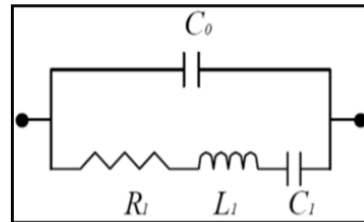

<b>Frequency: 24.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 24.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.58 pF	C0	=	0.49 pF
R1	=	54.20 Ω	R1	=	67.91 Ω
L1	=	52.83 mH	L1	=	50.66 mH
C1	=	0.83 fF	C1	=	0.87 fF
<b>Frequency: 40.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 40.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.65 pF	C0	=	0.63 pF
R1	=	27.21 Ω	R1	=	22.99 Ω
L1	=	10.55 mH	L1	=	10.47 mH
C1	=	1.50 fF	C1	=	1.51 fF
<b>Frequency: 52.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 52.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.63 pF	C0	=	0.64 pF
R1	=	18.03 Ω	R1	=	18.27 Ω
L1	=	5.74 mH	L1	=	5.50 mH
C1	=	1.63 fF	C1	=	1.70 fF


## MECHANICAL DIMENSIONS

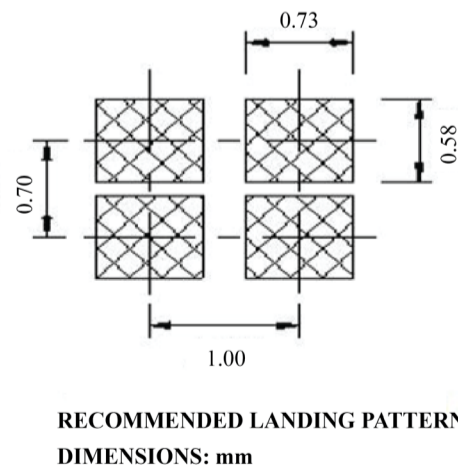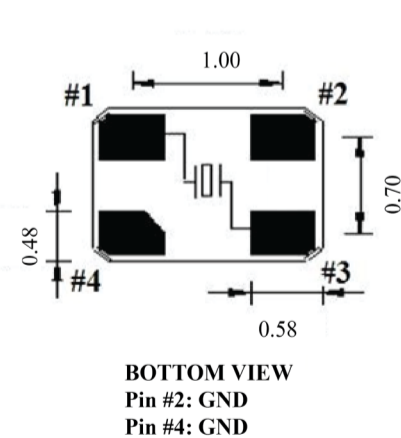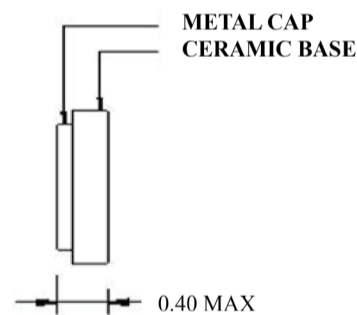

Note:

Due to material availability the Chamfer could be located on pin #1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

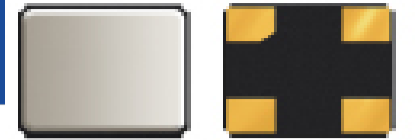

ABM12W SERIES


1.6 x 1.2 x 0.4mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## REFLOW PROFILE

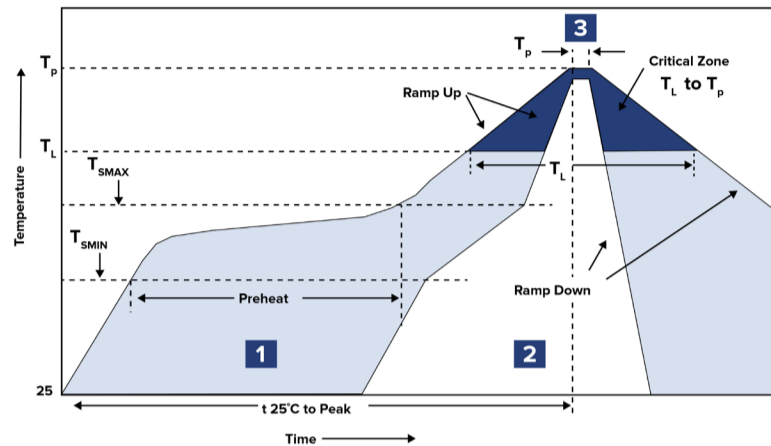

Zone	Description	Temperature	Time
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	$T_L$ 217°C	45 ~ 90 sec.
3	Peak Heat	$T_p$ 260°C MAX	10 sec.

## PACKAGING

T3: Tape and reel (3,000 pcs/reel)

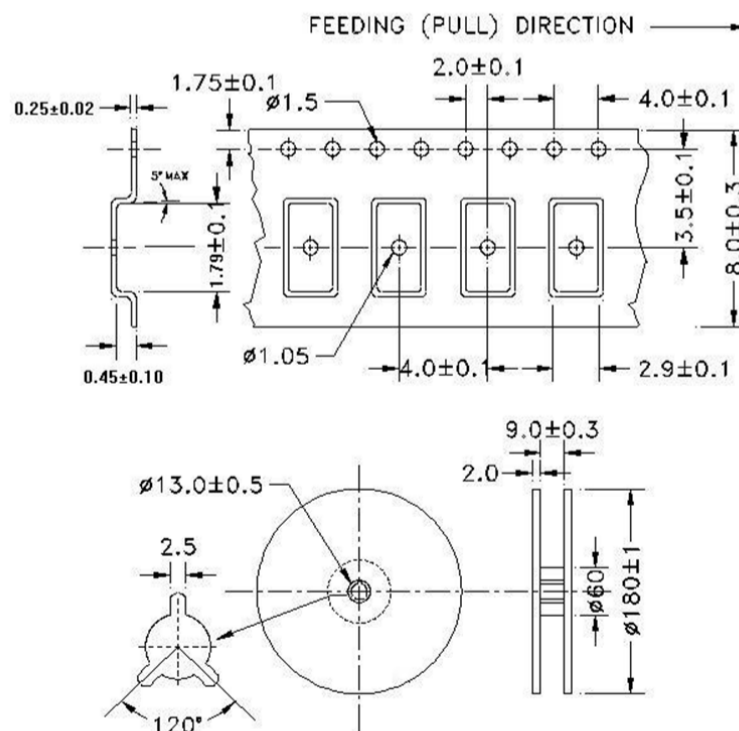

DIMENSIONS: mm



5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 10.05.2020

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [Abracon](#) manufacturer:*

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS1V-T1K-32.768kHz-12.5pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [16875](#) [ECS-80-18-30B-JEM-TR](#) [ECS-100-10-30B-CKL-TR](#) [MS1V-T1K-32.768kHz-6pF-20PPM-TA-QC-Au](#)