# ULTRA MINIATURE CERAMIC PACKAGE HIGH STABILITY SMD CRYSTAL





5.0 x 3.2 x 0.9mm

### **ABM3X**

### **FEATURES:**

- -40°C to +125°C wide operating temperature range
- ±40 ppm Max. All Inclusive frequency stability over 10-year product life
- Fundamental Mode, low ESR Quartz design
- Ultra miniature, Seam-Sealed, RoHS compliant reflow-able package


### > APPLICATIONS:

- Zigbee based designs for indoor / outdoor applications
- Wireless Sensor Networks
- Industrial Control
- Home and Building Automation
- Consumer Electronics
- PC Peripherals

### STANDARD SPECIFICATIONS

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency		24.000 32.000		MHz	
Operation Mode		Fundamental			
Operating Temperature	-40		+125	°C	
Storage Temperature	-55		+155	°C	
Overall Frequency Stability (All inclusive)	-40		+40	ppm	
Frequency Tolerance	-10		+10	ppm	
Frequency Stability over the Operating Temperature Range ( ref. to +25°C)	-25		+25	ppm	
Aging	-5		+5	ppm	@25±3°C 10 years
Equivalent series resistance (R1)			30	Ω	
Shunt capacitance (C0)			3.5	pF	
Motional capacitance (C1)		4.5		fF	
Load capacitance (CL)		10		pF	
Drive Level		50	100	μW	
Insulation Resistance	500			ΜΩ	@100Vdc±15V

### **OPTIONS AND PART IDENTIFICATION:**

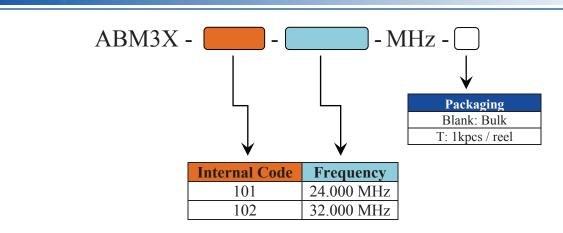

Example Part #: ABM3X-101-24.000MHz-T





## ULTRA MINIATURE CERAMIC PACKAGE HIGH STABILITY SMD CRYSTAL






**ABM3X** 

RoHS/RoHS II compliant

5.0 x 3.2 x 0.9mm

### **OUTLINE DIMENSIONS:**

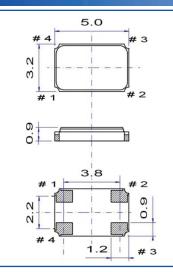


Pin function
# 1 crystal connection
# 2 GND

# 3 crystal connection # 4 GND

#4 #3 #3


Example for solder pattern



Do not design any conductive path between the pattern


**Dimensions: mm** 

### **TAPE & REEL:**

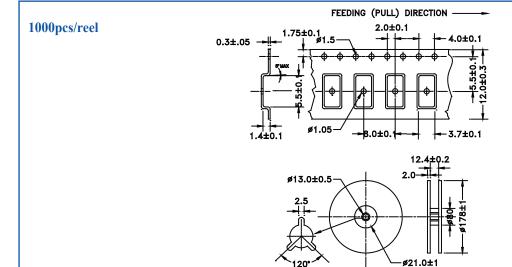

Dimensions: mm

### **REFLOW PROFILE:**

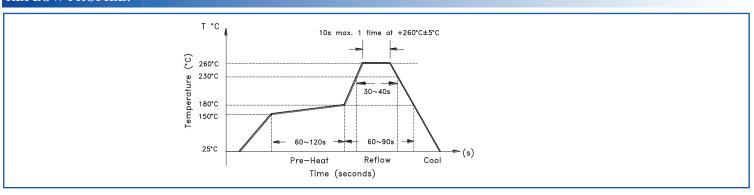



Need a test socket for the ABM3X Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, **click here. P/N AXS-5032-04-07** 

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

MC405 32.0000K-R3:PURE SN 7B-27.000MBBK-T MP1-8.0 99-BU 9B-15.360MBBK-B PTX-A2JM-10.000M 9C-7.680MBBK-T H10S-12.000-18-EXT-TR R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 MP-1-25.000MHZ-3L MP-1-6.000MHZ LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7B-30.000MBBK-T 6504-202-1501 6526-202-1501 BTJ120E02C SG636PCE-20.000MC 3404 CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R ABM11-16.000MHZ-9-B1U-T FL5000014 EUCA18-3.1872M 425F35E027M0000 17196 MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au VXM7-1C1-16M000 MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au MS1V-T1R-32.768kHz-12.5pF-20PPM-TA-QC-Au MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au 17000 17301 16875 ECS-80-18-30B-JEM-TR