

CERAMIC SURFACE MOUNT LOW PROFILE QUARTZ CRYSTALS

ABMM2



6.0 x 3.6 x 1.2 mm

ABMM2

 RoHS/RoHS II Compliant

FEATURES:

- Suitable for RoHS compliant reflow
- Low height 1.2 mm max
- Seam sealed ceramic package assures high reliability
- Available tight tolerance and stability

APPLICATIONS:

- Computers, Modems, Microprocessors
- Communication, Test equipment
- PCMCIA

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	7.3728		110.00	MHz	
Operation Mode	7.3728 – 30.00MHz	Fundamental			Standard
	30.01 – 100.00MHz	3 rd Overtone			Standard
	100.01 – 110.00MHz	5 th Overtone			Standard
	30.01 – 50.00MHz	Fundamental			See options
Operating Temperature	-10		+60	°C	See options
Storage Temperature	-40		+85	°C	
Frequency Tolerance @+25°C	-20		+20	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-20		+20	ppm	See options
Equivalent series resistance (R1)	See table 1 below			Ω	
Shunt capacitance (C0)			7.0	pF	
Load capacitance (CL)		18.0		pF	Standard (See options if other than STD)
Drive Level		100	500	μW	
Aging	-2		+2	ppm	@25°C±3°C First year
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V

TABLE 1- Standard ESR

Frequency (MHz)	ESR(Ω) max
7.3728 -7.999999 (Fund)	150
8.000 -9.999999 (Fund)	72
10.000 -50.000 (Fund)	50
30.000 – 100.000 (3 rd OT)	60
100.001 – 110.000 (5 th OT)	80



CERAMIC SURFACE MOUNT LOW PROFILE QUARTZ CRYSTALS

ABMM2



6.0 x 3.6 x 1.2 mm

ABMM2

RoHS/RoHS II Compliant

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ABMM2 - MHz - - - - - -

Frequency in MHz
Please specify the frequency in MHz.
e.g. 16.000MHz

Packaging
Blank: Bulk
T: 1000pcs / reel
T2: 250pcs / reel

Load Capacitance (pF)
Please specify CL in pF (8 to 33pF) or S for series
Please contact Abracon for other values


Freq. Stability
Blank: Standard
F; fund. AT for F>30MHz

Custom ESR if other than standard
R
□: Specify a value in Ω (e.g.: R40)

Freq. Tolerance
1: ± 10 ppm
7: ± 15 ppm

Frequency Stability (ppm)					
Operating Temp.	±10	±20	±30	±50	±100
0°C ~ +50° C	A3	A4	A6	-----	-----
-10°C ~ +50°C	B3	B4	B6	-----	-----
-10°C ~ +60°C	C1	Std	C6	-----	-----
-20°C ~ +70°C	E1	E2	E6	-----	-----
-40°C ~ +85°C	-----	D1	D6	D5	-----
-40°C ~ +1 05°C	-----	-----	-----	J5	J10
-40°C ~ +1 25°C	-----	-----	-----	K5	K10

CERAMIC SURFACE MOUNT LOW PROFILE QUARTZ CRYSTALS




6.0 x 3.6 x 1.2 mm


ABMM2

RoHS/RoHS II Compliant


OUTLINE DRAWING:

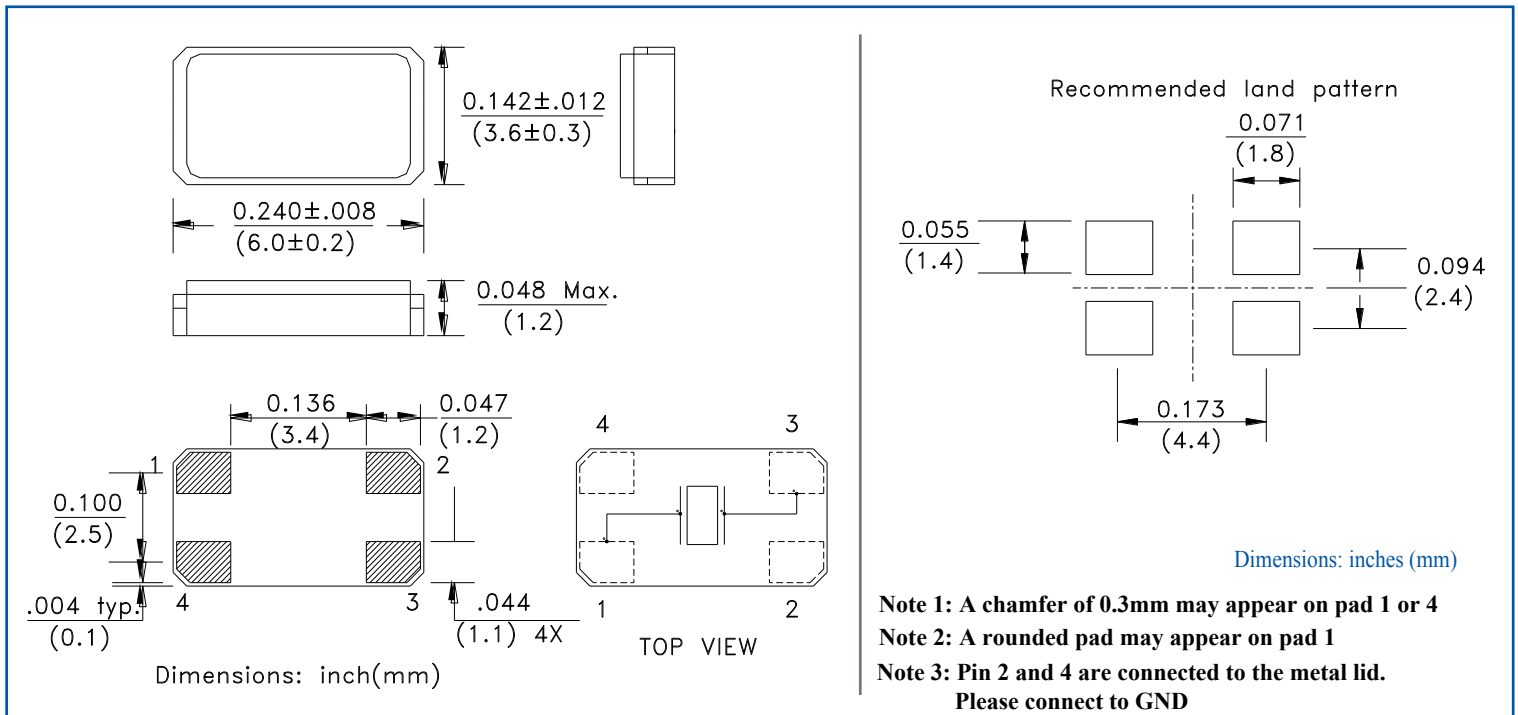

TAPE & REEL:

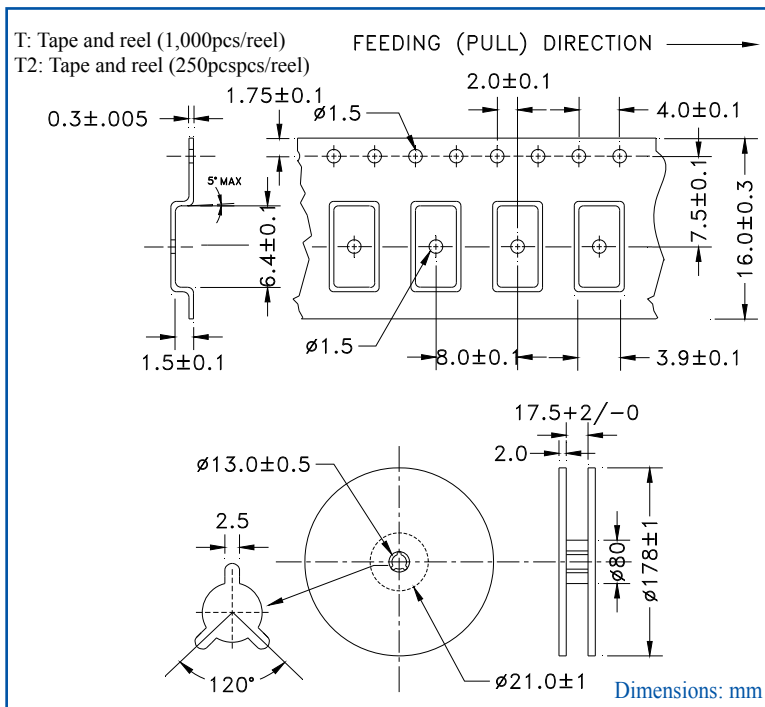

REFLOW PROFILE

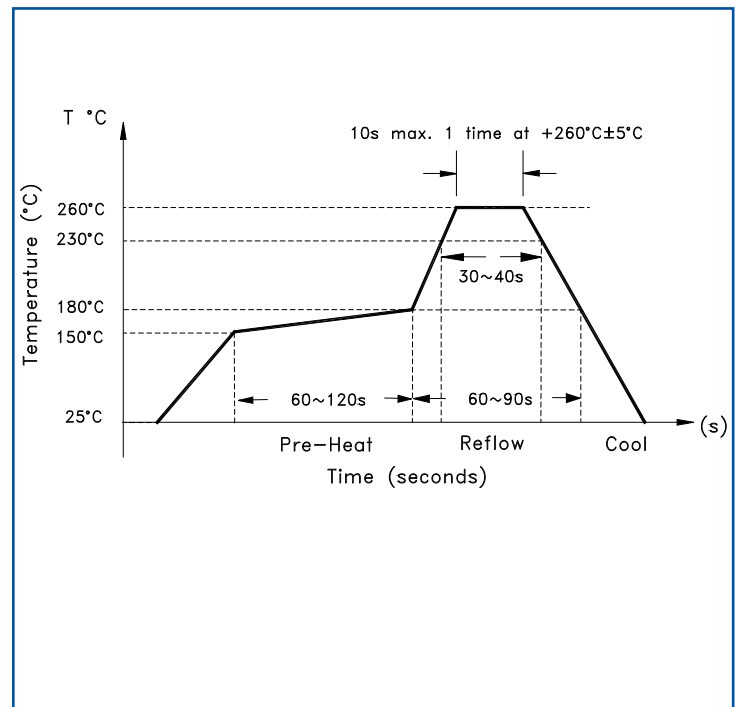

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale
 30332 Esperanza, Rancho Santa Margarita, California 92688
 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 01.18.13

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS1V-T1K-32.768kHz-12.5pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [16875](#) [ECS-80-18-30B-JEM-TR](#) [ECS-100-10-30B-CKL-TR](#) [MS1V-T1K-32.768kHz-6pF-20PPM-TA-QC-Au](#)