


32.768kHz IoT Optimized SMD Crystal



ABS04W SERIES



1.20 x 1.00 x 0.35mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

FEATURES

- Industry's smallest Tuning Fork Crystal (1.20 x 1.00 x 0.35 mm package)
- Ideally suited for space constraint IoT, Wearables & Wireless applications
- Simultaneously optimized for low plating load & ESR over extended temperature range
- Enhanced performance for start-up time and power savings with Low Energy SoC's
- Low profile - ideal for height constraint designs
- Available with ± 20 ppm set-tolerance

APPLICATIONS

- Wearables
- Wireless Modules
- Internet of Things (IoT)
- Bluetooth / Bluetooth Low Energy (BLE)
- Machine-to-Machine (M2M) Connectivity
- Ultra-Low Power MCU's, SoC's, Transceivers
- Near Field Communication
- ISM Band Applications

Electrical Specifications

Parameters	Min.	Typ.	Max.	Units	Note
Frequency	32.768			kHz	
Operation Mode	Flexural Mode (Tuning Fork)				
Operating Temperature	-40		+85	°C	See Options
Storage Temperature	-55		+125	°C	
Frequency Tolerance @ +25°C	-20		+20	ppm	Refer to Note #1 See options
Shift through standard RoHS Reflow, (2) reflow cycles maximum	-5.00	± 2.00	+5.00	ppm	260°C peak maximum reflow temperature, relative to stand-alone set-tolerance frequency
Temperature Coefficient:	-0.04	-0.03	-0.02	ppm/T ²	
Turn-over temperature:	+20	+25	+30	°C	
Frequency Stability Over Operating Temperature, relative to in-circuit measured frequency post reflow	-200		1	ppm	Over -40°C to +85°C
Load capacitance (CL)	4.0			pF	Refer to Note #2 See Options
Equivalent Series Resistance (ESR)		<75	80	k Ω	@ +25 \pm 3°C
		<75	130	k Ω	Over -40°C to +85°C
Shunt Capacitance (C0)		1.5	2.0	pF	Combined Electrode & Package Capacitance
Motional Capacitance (C1)		6.50		fF	C1 also referred as Cm
Motional Inductance (L1)		3,800,000		mH	L1 also referred as Lm
Drive Level		0.1	0.5	μ W	
Crystal sensitivity to closed-loop oscillator loading (Ts)	45	55	65	ppm/pF	Refer to Note #3
Q value	8,000	10,000			Quality Factor
Aging @ +25°C \pm 3°C [First Year]	-3		+3	ppm	Relative to post reflow measured frequency
Aging @ +25°C \pm 3°C [Over 10-years]	-15		+15	ppm	Relative to post reflow measured frequency
Insulation Resistance	500			M Ω	@ 100Vdc \pm 15V

*Refer to Note #1, #2, & #3 on the following page




5101 Hidden Creek Ln Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12.18.2018

ABRACON IS
 ISO9001-2015
 CERTIFIED

32.768kHz IoT Optimized SMD Crystal



ABS04W SERIES



1.20 x 1.00 x 0.35mm
 RoHS/RoHS II Complaint
 MSL = N/A: Not Applicable

Note #1: With an effective loop capacitance of 4.0pF, the oscillator circuit will be within set-tolerance specification; less any frequency shift due to the reflow process.

Note #2: The oscillator loop needs to present an effective loop capacitance of 4.0 pF to track the stand-alone crystal frequency. This loop capacitance is essential to ensure highest possible Closed-Loop Safety Factor for the entire population of crystals.

Note #3: $T_s = - (C1) / [2*(C0 + CL)^2]$ Where CL = 4pF

Options and Part Identification

ABS04W-32.768 kHz - [] - [] [] - []


Load Capacitance (pF)
V: 12.5pF
9: 9pF
7: 7pF
6: 6pF
5: 5pF
4: 4pF

Operating Temp. Range
B: -20°C ~ +70°C
D: -40°C ~ +85°C
J: -40°C ~ +105°C


Freq. Tolerance
2: ±20ppm
3: ±30ppm
5: ±50ppm

Packaging
Blank: Bulk
T5: Tape & Reel (5000pcs/reel)

Typical Frequency Tolerance Distribution (at 25°C ± 3°C):

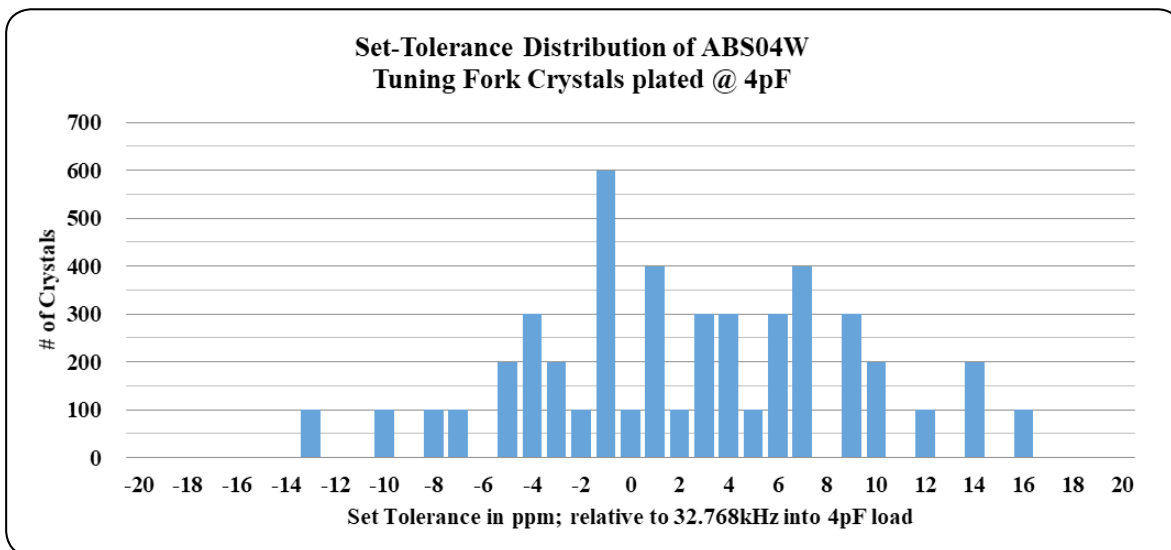

32.768kHz IoT Optimized SMD Crystal




ABS04W SERIES




1.20 x 1.00 x 0.35mm
RoHS/RoHS II Complaint
MSL = N/A: Not Applicable

Typical ESR Distribution (at 25°C ± 3°C):

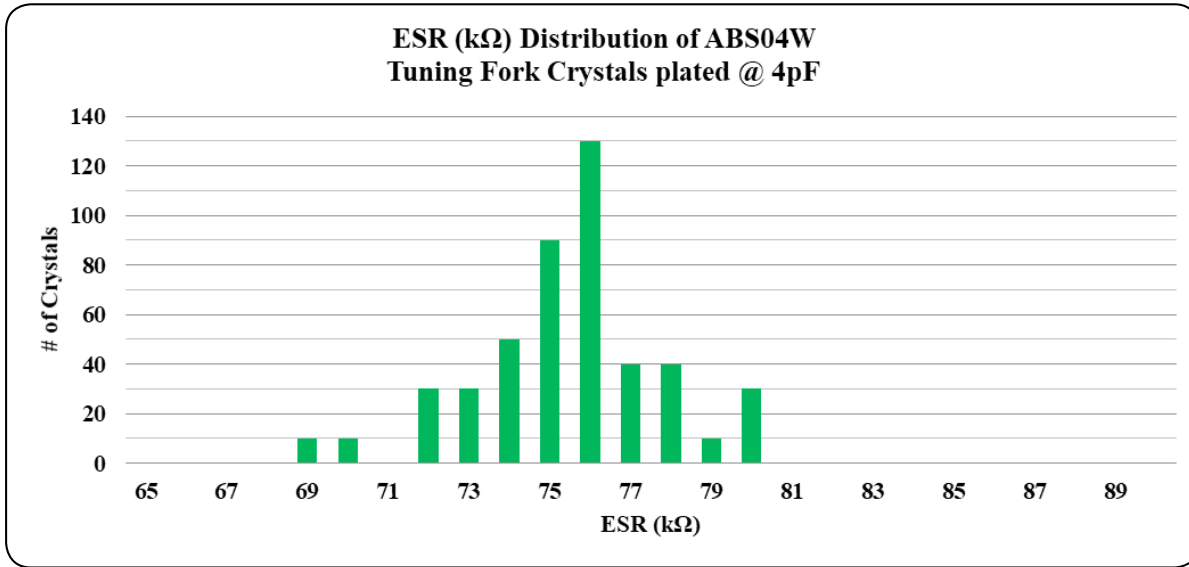

The data above reflects typical distribution, lot-to-lot variation applies


Typical Frequency vs. Temperature Characteristics:

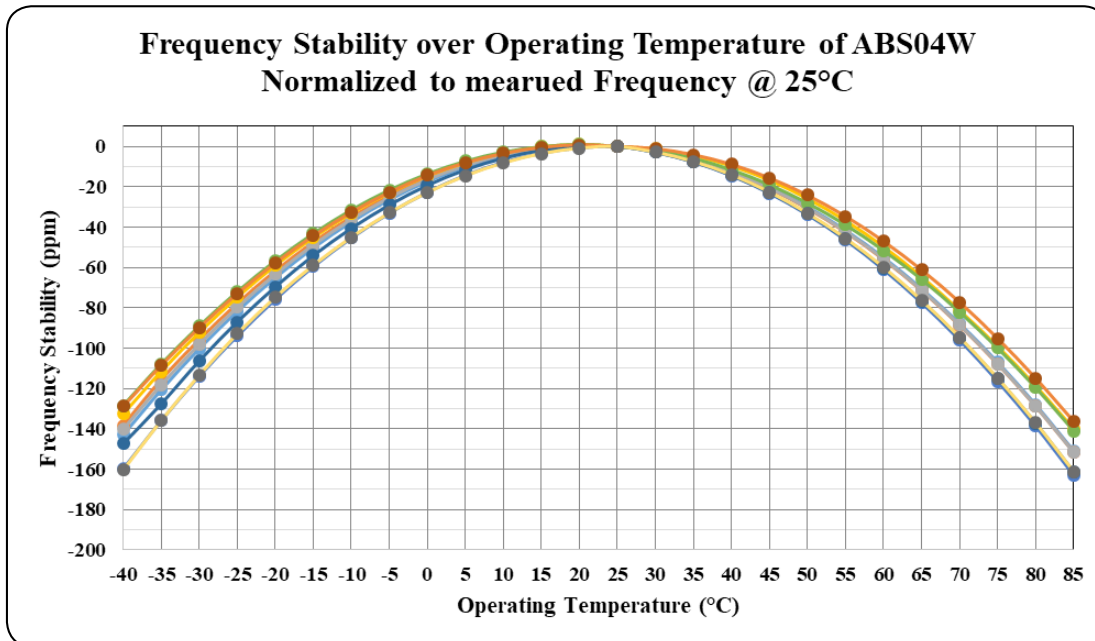

5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12.18.2018

ABRACON IS
ISO9001-2015
CERTIFIED




ABS04W SERIES




1.20 x 1.00 x 0.35mm
 RoHS/RoHS II Complaint
 MSL = N/A: Not Applicable

Typical ESR (Equivalent Series Resistance) vs. Temperature Characteristics:

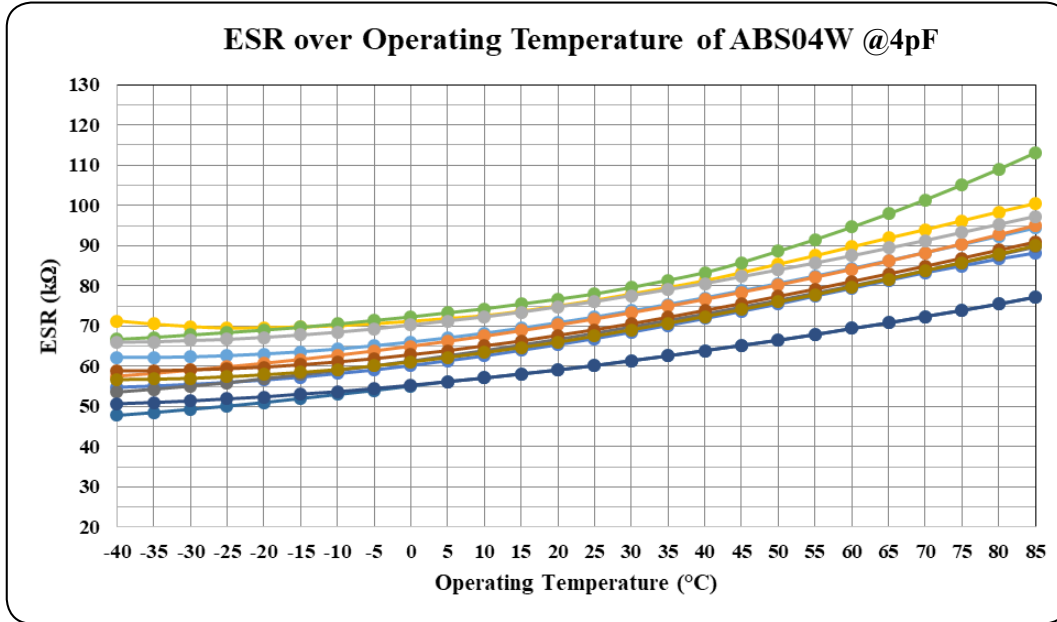

SPICE Model (based on typical values at 25°C ± 3°C):

Quartz Crystal Equivalent Circuit

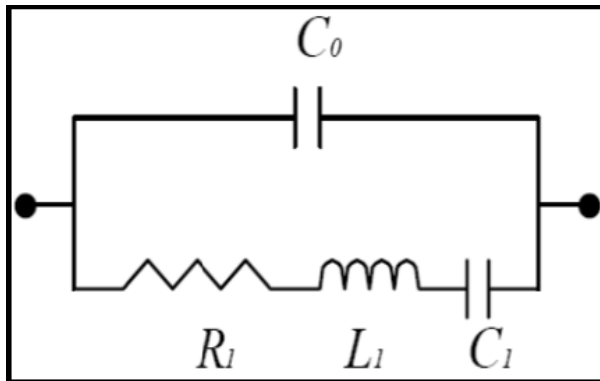

Plating Load (CL) = 4pF

C0	=	1.54	pF
R1	=	72,895	Ω
L1	=	3,702,326	mH
C1	=	6.47	fF


Plating Load (CL) = 6pF

C0	=	1.50	pF
R1	=	72,615	Ω
L1	=	3,750,717	mH
C1	=	6.38	fF

Plating Load (CL) = 12.5pF

C0	=	1.48	pF
R1	=	75,455	Ω
L1	=	3,660,470	mH
C1	=	6.55	fF

32.768kHz IoT Optimized SMD Crystal




ABS04W SERIES




1.20 x 1.00 x 0.35mm
RoHS/RoHS II Complaint
MSL = N/A: Not Applicable

Mechanical Dimensions


Top View

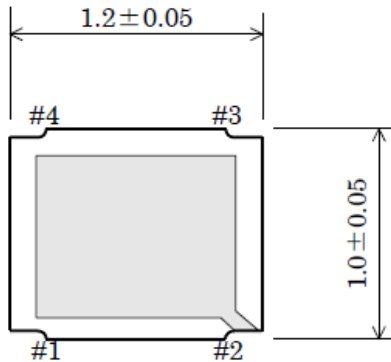


Side View

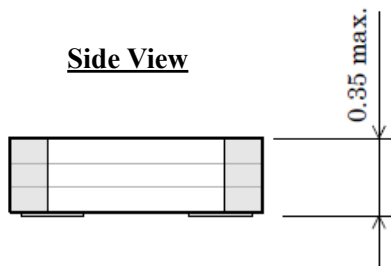

Bottom View

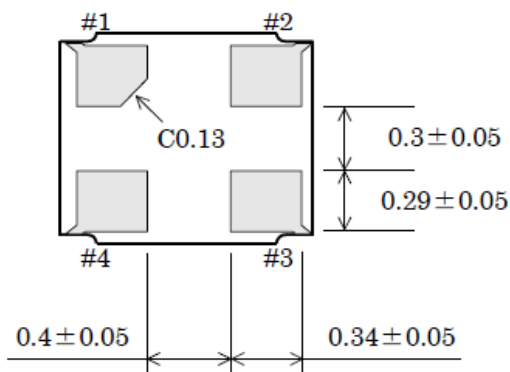

Crystal Internal Connections

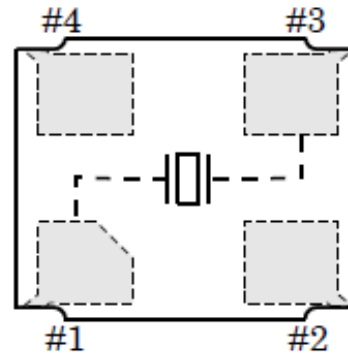


Pin #2: GND*

Pin #4: NC

*Pin #2 is connected to lid of the crystal package.

Recommended Land Pattern

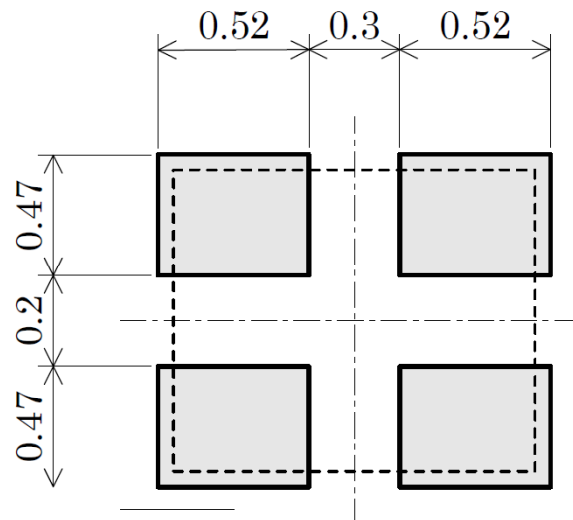

Dimensions: mm




5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12.18.2018

ABRACON IS
ISO9001-2015
CERTIFIED

32.768kHz IoT Optimized SMD Crystal




ABS04W SERIES




1.20 x 1.00 x 0.35mm
RoHS/RoHS II Complaint
MSL = N/A: Not Applicable

Recommended Reflow Profile

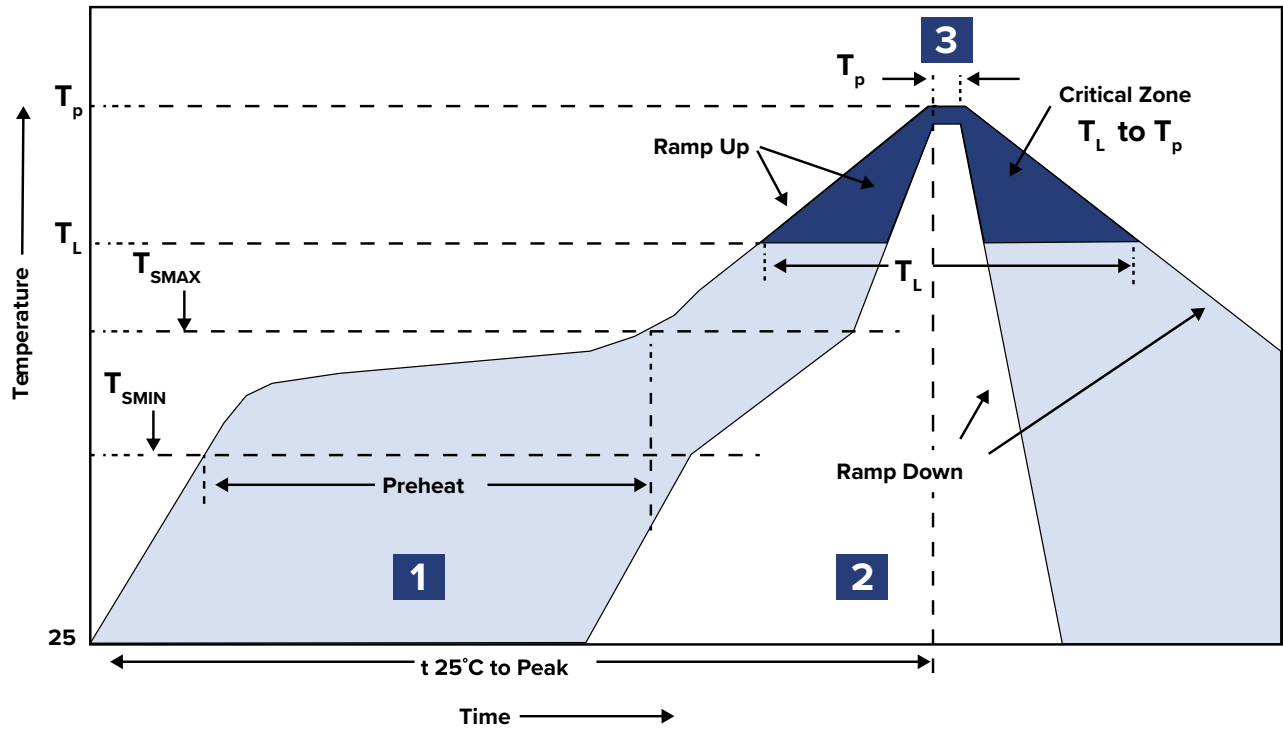

Zone	Description	Temperature	Time
1	Preheat / Soak	$T_{SMIN} \sim T_{SMAX}$ 150~170°C	80 ~ 100 sec.
2	Reflow	T_L 220°C	50 ~ 70 sec.
3	Peak heat	T_P 260±5°C	5 sec. MAX.

32.768kHz IoT Optimized SMD Crystal




ABS04W SERIES



1.20 x 1.00 x 0.35mm
 RoHS/RoHS II Complaint
 MSL = N/A: Not Applicable

Packaging:

T5: Tape and reel (5,000pcs/reel)

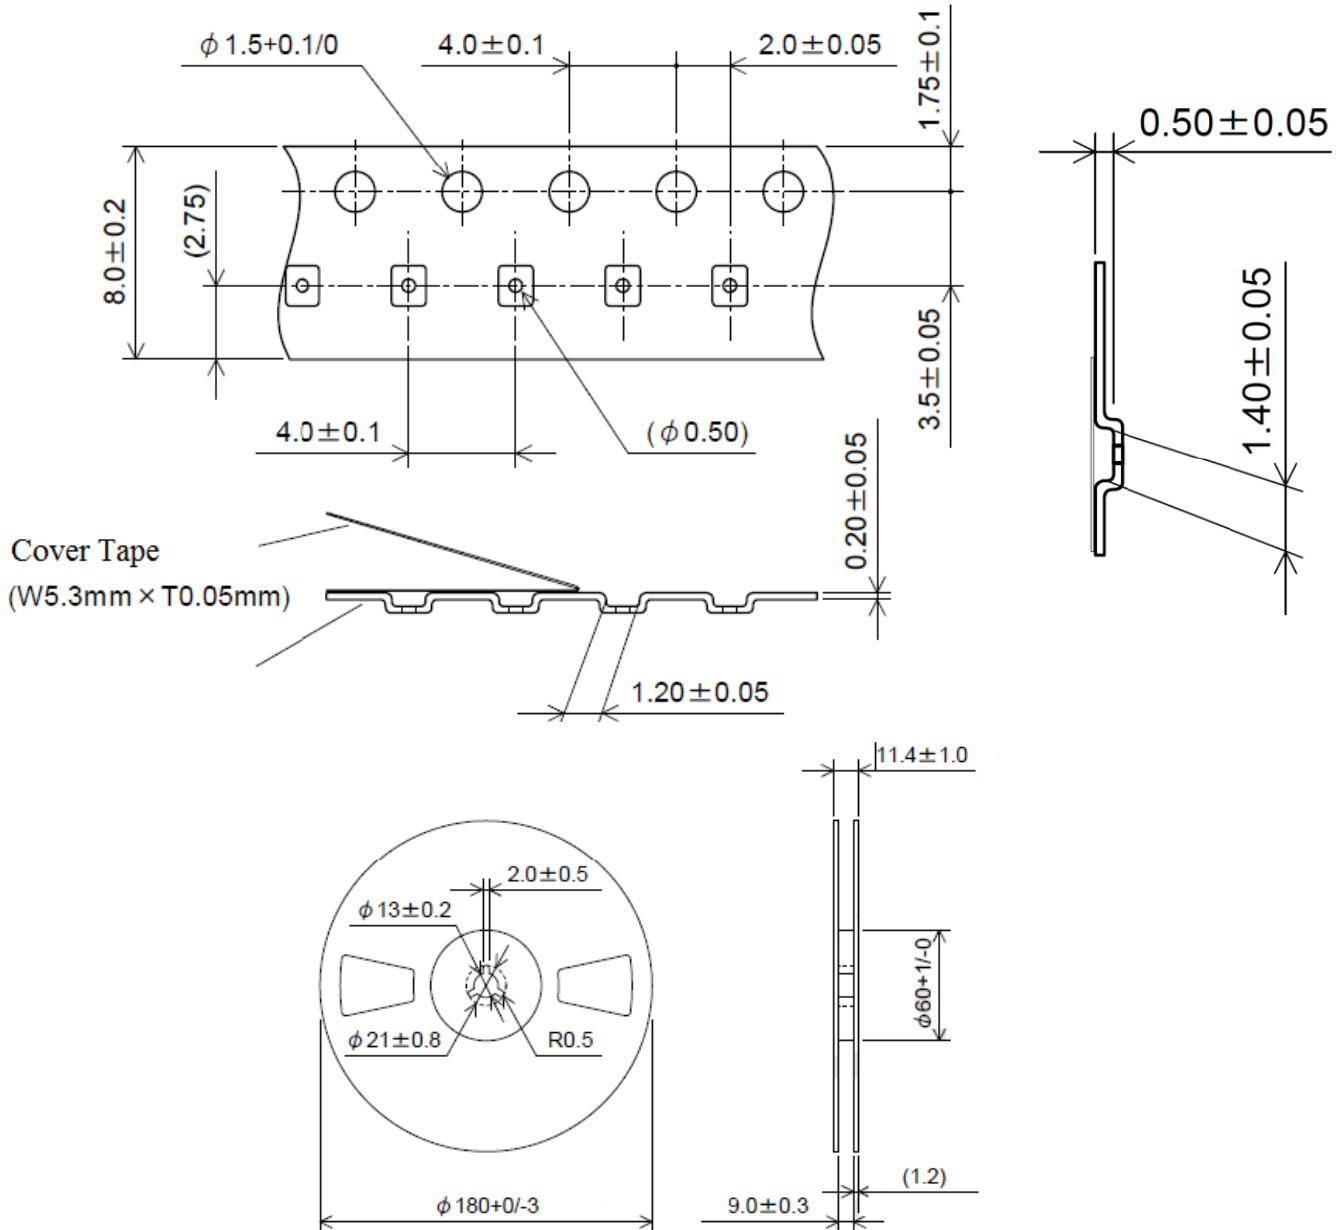

Dimensions: mm

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 12.18.2018

ABRACON IS
 ISO9001-2015
 CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS1V-T1K-32.768kHz-12.5pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [16875](#) [ECS-80-18-30B-JEM-TR](#) [ECS-100-10-30B-CKL-TR](#) [MS1V-T1K-32.768kHz-6pF-20PPM-TA-QC-Au](#)