ACAG0301-24505500-T

FEATURES

- Dual band chip antenna
- Gain of 2.23dBi | 4.05dBi
- Made using LTCC (low temperature co-fired ceramic) technology
- Small form factor 3.2 x 1.6 x 1.2mm
- Omni-directional

APPLICATIONS


- IoT and wearable
- WiFi
- Bluetooth
- ISM applications

ELECTRICAL CHARACTERISTICS

Item	Specification			
Frequency Range	2400 MHz~2500 MHz	5150 MHz~5850 MHz		
Frequency After Matching	2450 MHz	5500 MHz		
Bandwidth	100 MHz (typ.)	800 MHz (typ.)		
Return Loss	-7 dB (max.)	-7 dB (max.)		
Gain	2.23 dBi	4.05 dBi		
Impedance	50 Ω			
Azimuth	Omni-directional			
Operating Temperature range	$-40^{\circ}C \sim + 85^{\circ}C$			


MECHANICAL DIMENSIONS (mm)

Antenna Dimension

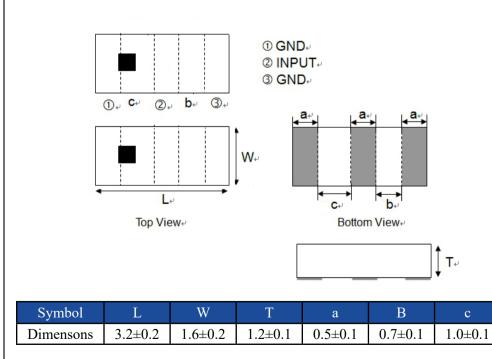

ABRACON

Layout Dimension

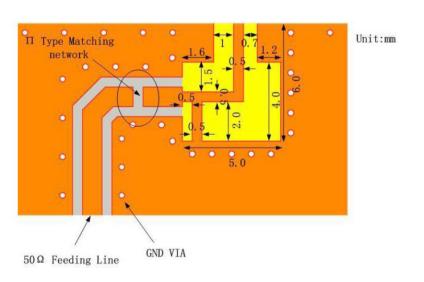

5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com REVISED: 12.21.2020

ABRACON IS ISO9001-2015 CERTIFIED

E

3.2 x 1.6 x 1.2mm

MSL = 3

RoHS/RoHS II Compliant

(Pb)


ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

EVALUATION BOARD AND MATCHING CIRCUITS

Unit:mm G O.8pF C O.8pF

ANTENNA RESPONSE – SMITH CHART AND RETURN LOSS S11

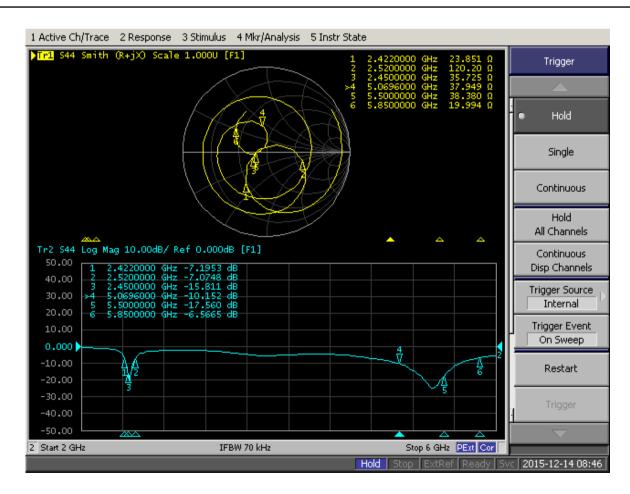




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020**

ABRACON IS ISO9001-2015 CERTIFIED

ACAG0301-24505500-T


3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

RADIATION PATTERNS

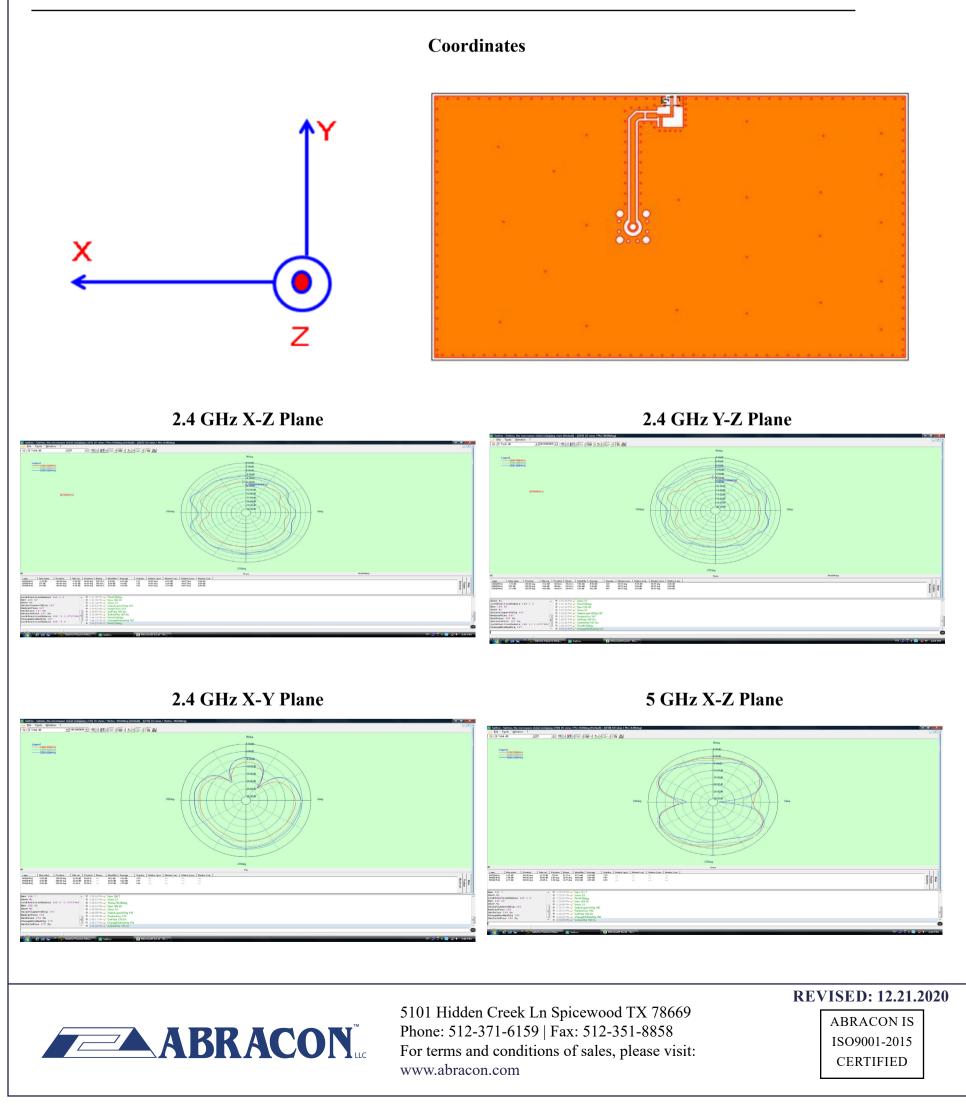

ACAG0301-24505500-T

RADIATION PATTERNS

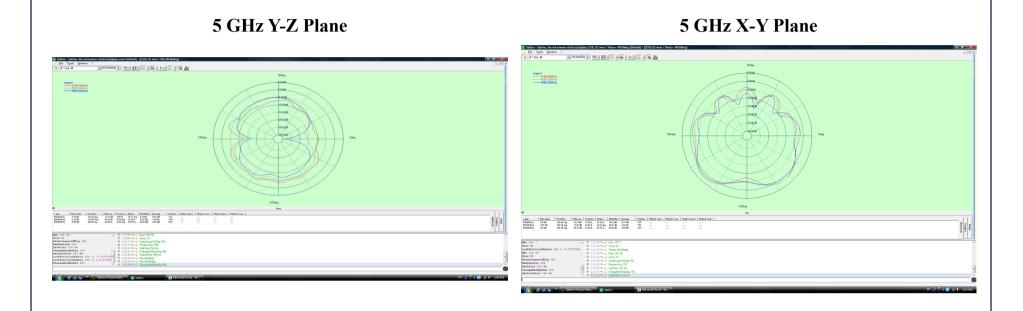

3D RADIATION PATTERNS

2450 MHz

Frequency (MHz)	2400	2450	2500
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	1.95	2.23	2.07
Efficiency (%)	42	66.5	50

Frequency (MHz)	5150	5500	5850
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	3.87	4.05	3.92
Efficiency (%)	70	76.8	64



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 12.21.2020

3.2 x 1.6 x 1.2mm

MSL = 3


(Pb) | RoHS/RoHS II Compliant

ABRACON IS ISO9001-2015 CERTIFIED

5500 MHz


ACAG0301-24505500-T

REFLOW SOLDERING STANDARD CONDITION

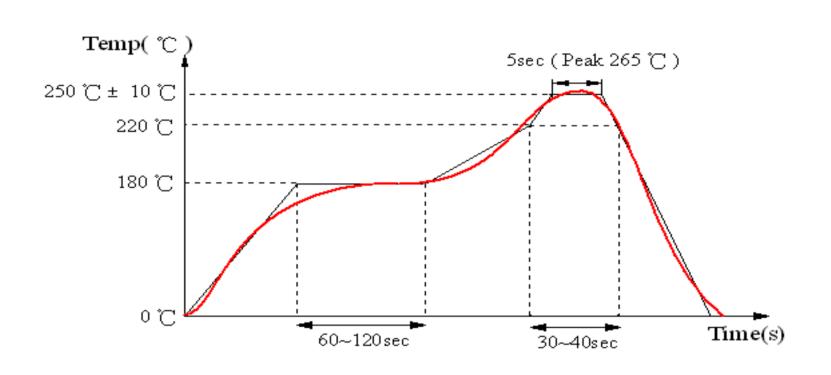

PACKAGING

Reel (3000 pcs/Reel) Size of the carton: 330 x 210 x 210 mm

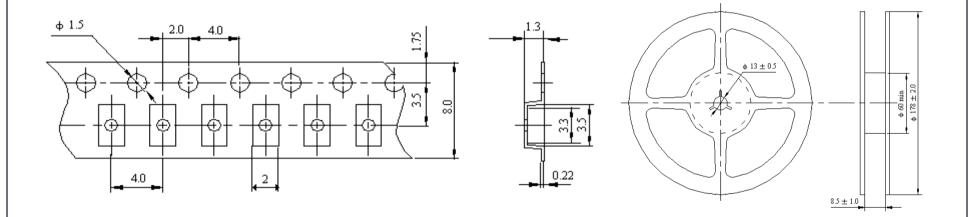

Dimensions: mm

Storage Temperature Range : <30 degree C, Humidity : <60%RH
MSL - 3
Oxidizable, 12 months in a vacuum sealed bag.
Once opened, please repack the unused items within 168 hours by re-seal package treatment.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020**

ABRACON IS ISO9001-2015 CERTIFIED



3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

ACAG0301-24505500-T



CAUTIONS

1. Static voltage

Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.

2. Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

3. Soldering

Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as on the patterns as this will change the performance of the antenna.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020**

ABRACON IS ISO9001-2015 CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Abracon manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100
 SIMNA-868
 SIMNA

 915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060
 TRA9020S3PBN-001
 GD5W

 28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 EXB144SM
 C37
 MAF94051
 GD35-17P-NF
 P1744
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 AO-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393