ACAJ-110-T



RoHS / RoHS II Compliant





Moisture Sensitivity Level (MSL) - MSL = 1

FEATURES:

- Passive Dielectric Chip Antenna
- Covering dual ISM bands 868MHz and 915MHz
- SMA mount, Reflowable to 255 degrees C max.
- Compact Dimensions (9.0mm x 3.0mm x 1.2mm)
- Peak Gain 868MHz -2.5dBi, 915MHz -2.7dBi
- VSWR 3.0:1 Max (measured on matched EV board)
- Impedance 50 Ohms
- Linear Polarization / Omni-directional azimuth pattern
- RoHS/RoHS II compliant

> APPLICATIONS:


- ISM 868 / 915MHz
- Low power radio links
- · Sensor networks
- For use with ultra low power transceiver IC's

STANDARD SPECIFICATIONS

ITEM		SPECIFICATION		
Frequency Range		868/915MHz		
VSWR		3.0: 1 Max		
Polarization		Linear		
Azimuth Beam Pattern		Omni-directional		
Impedance		50Ω		
Operating Temperature		-35°C to + 85°C		
Frequency [MHz]		868	915	
Gain	Peak	-2.5	-2.7	
[dBi]	Average	-3.4	-1.8	
Efficiency [%]		34	37	

The results are measured on the 100x50mm² evaluation board.

PART IDENTIFICATION:










ACAJ-110-T





PCB DESIGN GUIDE






Antenna Bottom




NO	Pin Assignment		
1	Feeding		
2	N/C		
3	N/C (Connected Stub line)		

MEASUREMENT GUIDE

Typical Measurement Result (VSWR, RL & Smith Chart) @ 868MHz




Measured VSWR & Return-loss @868MHz



NO	Matching Value		
1	N/C		
2	15 nH		
(3)	5.0 pF		

Measured Smith Chart @868MHz









ACAJ-110-T






S11 (VSWR)- Penta Band (GSM850&900, DCS, PCS, U

Typical Measurement Result (VSWR, RL & Smith Chart) @ 915MHz




NO	Matching Value		
1	N/C		
2	8.2 nH		
3	4.3 pF		


Measured VSWR & Return-loss @915MHz




Measured Smith Chart @ 915 MHz



Measured Antenna Efficiency

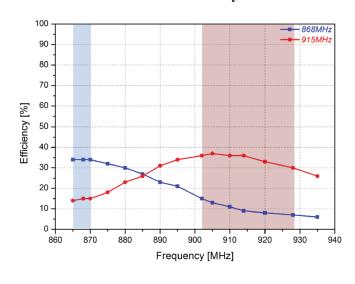

Measured Average Gain

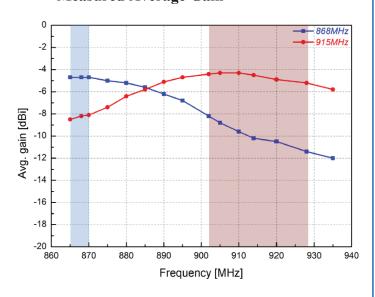







ACAJ-110-T






OUTLINE DIMENSION:

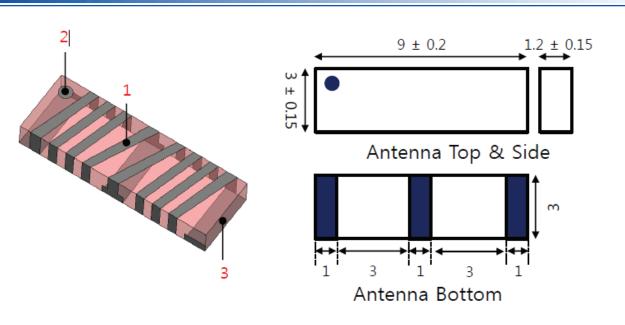

No	Name	Function	Material
1	Electrode	Radiation Element	Ag
2	Electrode	Identification Mark	Ag
3	Body	Dielectric Material	Ceramic

Unit: mm

REFLOW PROFILE:

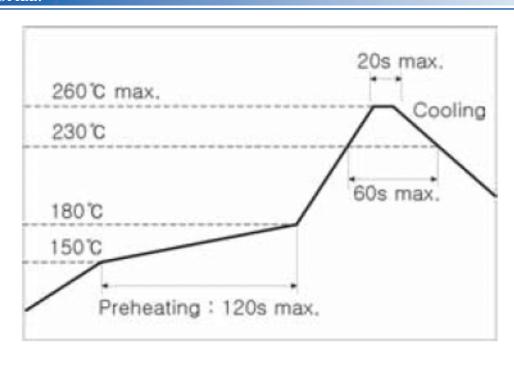







ACAJ-110-T





TAPE & REEL:



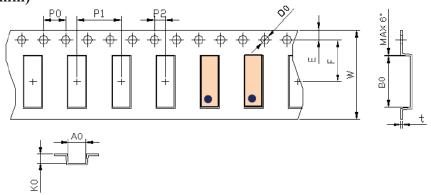

A0	3.20 ± 0.10	P0	4.00 ± 0.10	Е	1.75±0.10
В0	9.20 ± 0.10	P1	8.00 ± 0.10	F	7.50 ± 0.10
K0	1.65 ±0.10	P2	2.00 ±0.10	W	16.00 ±0.30
D0	1.55 ±0.05	-	-	t	0.30 ±0.05

Packing Quantity

Item	Quantity	Dimension
Reel	1,000 ea	Φ7" * 16mm

CAUTION:

Static voltage

Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.

Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

Soldering

Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as the Ag patterning as this will change the performance of the antenna.

> **NOTES:**

- i) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- ii) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- iii) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- iv) When changing your production process, please notify ABRACON immediately.
- v) ABRACON LLC's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Lifedependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON LLC is required. Please contact ABRACON LLC for more information.
- vi) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 GD35-17P-NF P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393