


Wire Wound Inductor - Ceramic Or Ferrite Base



2.92 x 2.79 x 2.29mm

AISC-1008(F)

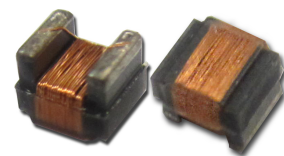

RoHS/RoHS II Compliant

FEATURES:

- Ceramic or Ferrite Construction assures the utmost in the thermal stability and high SRF
- Exceptionally high Q compared to non-wirewound inductor, especially at high frequencies
- Inductance values available from 4.7 nH to 10,000nH

APPLICATIONS:

- Widely applied in the VCO, SAW circuit for GSM, CDMA communications
- Used in hard disk, notebook computer and other electronic equipment

STANDARD SPECIFICATIONS:

| Part Number AISC-1008- Inductance Code | Inductance | Tolerance | Min. Quality Factor | L/Q Test Freq. | Max. DC Resistance | Max. Rated Current | Min. Self-resonant Frequency |
|--|------------|------------|---------------------------|-------------------|-----------------------|-----------------------|---------------------------------|
| Units | nH | - | - | MHz | Ω | mA | MHz |
| Symbol | L | - | Q | Freq. | DCR | I _r | S.R.F |
| AISC-1008-R0047 | 4.7 | J, K, M | 50 | 50/1500 | 0.11 | 1000 | >6000 |
| AISC-1008-R010 | 10 | G, J, K, M | 50 | 50/500 | 0.08 | 1000 | 4100 |
| AISC-1008-R012 | 12 | G, J, K, M | 50 | 50/500 | 0.09 | 1000 | 3300 |
| AISC-1008-R015 | 15 | G, J, K, M | 50 | 50/500 | 0.13 | 1000 | 2500 |
| AISC-1008-R018 | 18 | G, J, K, M | 50 | 50/350 | 0.11 | 1000 | 2500 |
| AISC-1008-R022 | 22 | G, J, K, M | 55 | 50/350 | 0.12 | 1000 | 2400 |
| AISC-1008-R027 | 27 | G, J, K, M | 55 | 50/350 | 0.13 | 1000 | 1600 |
| AISC-1008-R033 | 33 | G, J, K, M | 60 | 50/350 | 0.14 | 1000 | 1600 |
| AISC-1008-R039 | 39 | G, J, K, M | 50 | 50/350 | 0.15 | 1000 | 1500 |
| AISC-1008-R047 | 47 | G, J, K, M | 65 | 50/350 | 0.16 | 1000 | 1500 |
| AISC-1008-R056 | 56 | G, J, K, M | 50 | 50/350 | 0.18 | 1000 | 1300 |
| AISC-1008-R068 | 68 | G, J, K, M | 65 | 50/350 | 0.21 | 1000 | 1200 |
| AISC-1008-R082 | 82 | G, J, K, M | 60 | 50/350 | 0.22 | 1000 | 800 |
| AISC-1008-R10 | 100 | G, J, K, M | 60 | 25/350 | 0.56 | 650 | 1000 |
| AISC-1008-R12 | 120 | G, J, K, M | 60 | 25/350 | 0.63 | 650 | 950 |
| AISC-1008-R15 | 150 | G, J, K, M | 50 | 25/100 | 0.62 | 580 | 800 |
| AISC-1008-R18 | 180 | G, J, K, M | 50 | 25/100 | 0.7 | 620 | 750 |
| AISC-1008-R22 | 220 | G, J, K, M | 50 | 25/100 | 0.8 | 500 | 630 |
| AISC-1008-R27 | 270 | G, J, K, M | 50 | 25/100 | 0.91 | 500 | 600 |
| AISC-1008-R33 | 330 | G, J, K, M | 50 | 25/100 | 1.05 | 450 | 530 |
| AISC-1008-R39 | 390 | G, J, K, M | 50 | 25/100 | 1.12 | 470 | 480 |
| AISC-1008-R47 | 470 | G, J, K, M | 50 | 25/100 | 1.19 | 470 | 450 |
| AISC-1008-R56 | 560 | G, J, K, M | 50 | 25/100 | 1.33 | 400 | 390 |
| AISC-1008-R62 | 620 | G, J, K, M | 45 | 25/100 | 1.4 | 300 | 375 |
| AISC-1008-R68 | 680 | G, J, K, M | 45 | 25/100 | 1.47 | 400 | 360 |
| AISC-1008-R75 | 750 | G, J, K, M | 45 | 25/100 | 1.54 | 360 | 360 |
| AISC-1008-R82 | 820 | G, J, K, M | 45 | 25/100 | 1.61 | 400 | 330 |
| AISC-1008-R91 | 910 | G, J, K, M | 35 | 25/50 | 1.68 | 380 | 295 |
| AISC-1008-1R0 | 1,000 | G, J, K, M | 35 | 25/50 | 1.8 | 370 | 270 |
| AISC-1008-1R2 | 1,200 | G, J, K, M | 35 | 7.9/50 | 2 | 310 | 200 |
| AISC-1008-1R5 | 1,500 | G, J, K, M | 28 | 7.9/50 | 2.3 | 330 | 150 |
| AISC-1008-1R8 | 1,800 | G, J, K, M | 28 | 7.9/50 | 2.6 | 300 | 120 |
| AISC-1008-2R2 | 2,200 | G, J, K, M | 28 | 7.9/50 | 2.8 | 280 | 100 |
| AISC-1008-2R7 | 2,700 | G, J, K, M | 22 | 7.9/25 | 3.2 | 290 | 90 |
| AISC-1008-3R3 | 3,300 | G, J, K, M | 22 | 7.9/25 | 3.4 | 290 | 70 |
| AISC-1008-3R9 | 3,900 | G, J, K, M | 17 | 7.9/25 | 3.6 | 260 | 60 |
| AISC-1008-4R7 | 4,700 | G, J, K, M | 20 | 7.9/25 | 4 | 260 | 50 |
| AISC-1008-5R6 | 5,600 | G, J, K, M | 20 | 7.9/25 | 5.7 | 240 | 40 |
| AISC-1008-6R8 | 6,800 | G, J, K, M | 20 | 7.9/25 | 7.7 | 200 | 40 |
| AISC-1008-8R2 | 8,200 | G, J, K, M | 20 | 7.9/25 | 10.7 | 150 | 30 |

ABRACON IS
ISO 9001 :2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com


Revised: 09.17.13

Wire Wound Inductor - Ceramic Or Ferrite Base

AISC-1008(F)



RoHS/RoHS II Compliant

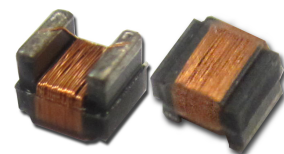

2.92 x 2.79 x 2.29mm

| Part Number AISC-1008F- Inductance Code | Inductance | Tolerance | Min. Quality Factor | L/Q Test Freq. | Max. DC Resistance | Max. Rated Current | Min. Self-resonant Frequency |
|---|------------|-----------|---------------------------|-------------------|-----------------------|-----------------------|---------------------------------|
| Units | nH | - | - | MHz | Ω | mA | MHz |
| Symbol | L | - | Q | Freq. | DCR | Ir | S.R.F |
| AISC-1008F-R33 | 330 | J, K, M | 50 | 25/100 | 0.17 | 700 | 600 |
| AISC-1008F-1R0 | 1,000 | J, K, M | 20 | 7.9/50 | 0.80 | 600 | 250 |
| AISC-1008F-1R2 | 1,200 | J, K, M | 37 | 7.9/50 | 0.80 | 650 | 250 |
| AISC-1008F-1R5 | 1,500 | J, K, M | 35 | 7.9/50 | 0.76 | 630 | 190 |
| AISC-1008F-1R8 | 1,800 | J, K, M | 33 | 7.9/50 | 0.84 | 600 | 170 |
| AISC-1008F-2R2 | 2,200 | J, K, M | 30 | 7.9/50 | 1.15 | 520 | 150 |
| AISC-1008F-2R7 | 2,700 | J, K, M | 25 | 7.9/50 | 1.30 | 490 | 120 |
| AISC-1008F-3R3 | 3,300 | J, K, M | 23 | 7.9/50 | 1.70 | 450 | 100 |
| AISC-1008F-3R9 | 3,900 | J, K, M | 26 | 7.9/25 | 2.00 | 420 | 100 |
| AISC-1008F-4R7 | 4,700 | J, K, M | 31 | 7.9/7.9 | 1.68 | 400 | 60 |
| AISC-1008F-5R6 | 5,600 | J, K, M | 23 | 7.9/7.9 | 2.65 | 380 | 80 |
| AISC-1008F-6R8 | 6,800 | J, K, M | 20 | 7.9/7.9 | 3.00 | 360 | 60 |
| AISC-1008F-8R2 | 8,200 | J, K, M | 20 | 7.9/7.9 | 3.30 | 330 | 40 |
| AISC-1008F-100 | 10,000 | J, K, M | 15 | 7.9/7.9 | 2.95 | 300 | 40 |

Test Conditions and Equipemt

- Ambient Temperature: 20± 15°C
- Relative Humidity: 65%±20%
- Air Pressure: 86KPa to 106KPa

Inductance (L): Agilent4287A+Agilent16197A or equivalent, -13dBm or 10mA

Direct Current Resistance (DCR): HIOKI 3540 or equivalent

Q Factor (Q): Agilent4287A+Agilent16197A or equivalent, -13dBm or 10mA


Self-Resonant Frequency (SRF): Agilent4991B+Agilent16197A and HP 8753E or equivalent, -20dBm or 50mV

Rated Current (Ir): Ir is direct electric current as chip surface temperature rose just 20°C against chip initial surface temperature (Ta)

Operating Temperature: -40°C to +125°C for AISC-1008, -40°C to +85°C for AISC-1008F

Storage Temperature: -10°C to +40°C, 70% RH max.

Wire Wound Inductor - Ceramic Or Ferrite Base

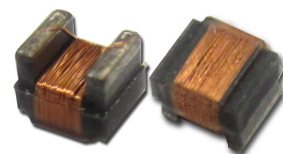


2.92 x 2.79 x 2.29mm

AISC-1008(F)



RoHS/RoHS II Compliant

ELECTRICAL CHARACTERISTICS CURVES :

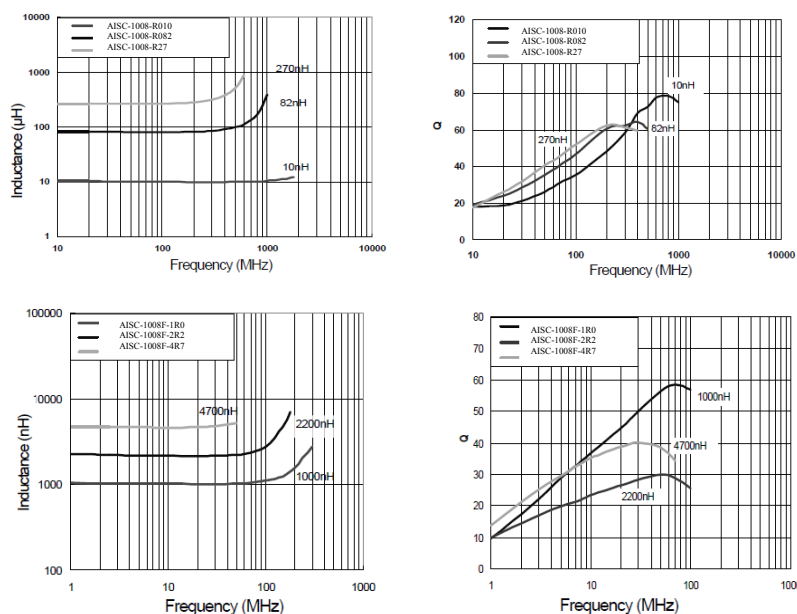


PART IDENTIFICATION:

AISC-1008 - -

| Material Code | Inductance Code | Tolerance Code | Packaging |
|------------------------------|---------------------------|--|--------------------------|
| Blank: Ceramic F: Ferrite | Please refer to the table | G: ±2% J: ±5% K: ±10% M: ±20% | T: Tape & Reel (2k/reel) |

OUTLINE DIMENSIONS:

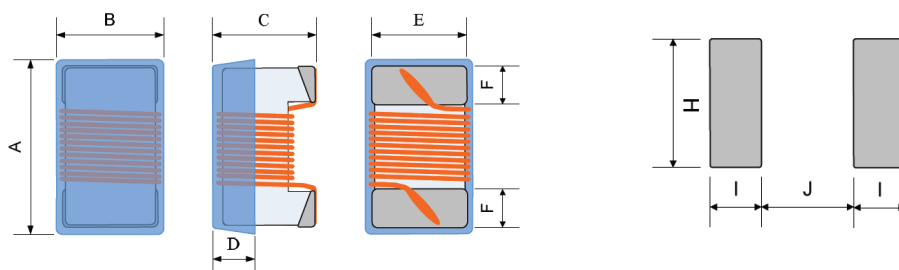

| A MAX. | B MAX. | C MAX. | D REF. | E | F | H REF. | I REF. | J REF. |
|--------|--------|--------|--------|---------|---------|--------|--------|--------|
| 2.92 | 2.79 | 2.29 | 0.51 | 2.1±0.2 | 0.5±0.2 | 2.54 | 1.02 | 1.27 |

Dimension: mm


ABRACON IS
ISO 9001 :2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 09.17.13

Wire Wound Inductor - Ceramic Or Ferrite Base

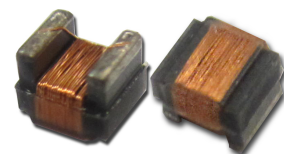


2.92 x 2.79 x 2.29mm

AISC-1008(F)




RoHS/RoHS II Compliant

Materials

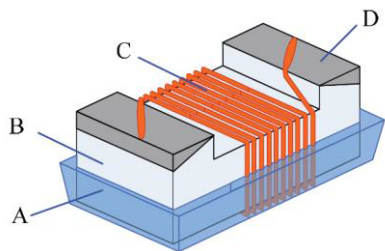



| No. | Components | Material |
|-----|------------|---|
| A | Coating | Ultraviolet epoxy resin |
| B | Core | Ceramic |
| C | Wire | Polyurethane system enameled copper wire |
| D | Electrodes | AISC-1008: Mo-Mn with Ni and Au plating AISC-1008F: Ag-Pd with Ni-Sn plating |

REFLOW PROFILE:



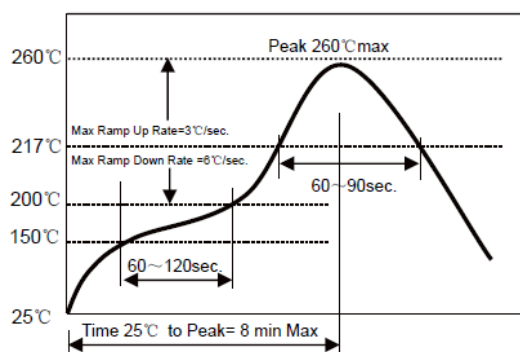


- Δ 1~2 °C/sec. Ramp
- Δ Pre-heating: 150~190°C /90±30 sec.
- Δ Time above 240 °C: 20~40sec
- Δ Peak temperature: 260 °C Max./10sec;
- Δ Solder paste: Sn/3.0Ag/0.5Cu
- Δ Max.2 times for Re-flowing

TAPE & REEL: 2kpcs /Reel

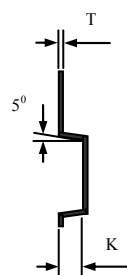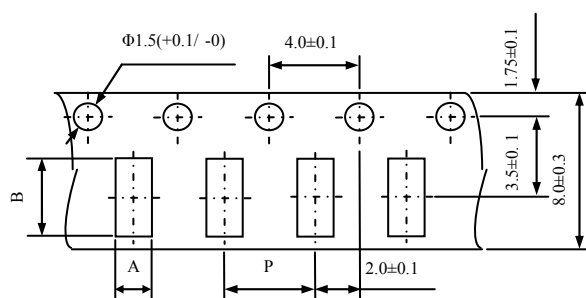

| A | P | B | K Max | T |
|----------|---------|----------|----------|----------|
| 2.73±0.2 | 4.0±0.1 | 2.90±0.2 | 2.34±0.2 | 0.23±0.1 |

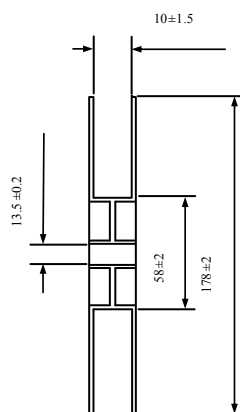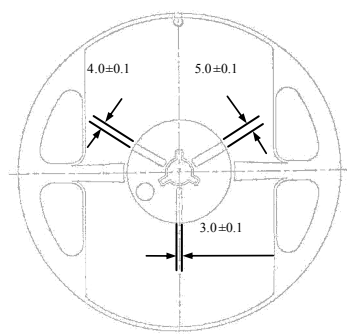

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001 :2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

Revised: 09.17.13

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)