

**ABRACON, LLC
ENGINEERING/PROCESS CHANGE NOTIFICATION FORM**

ABRACON ENGINEERING ORIGINATOR:

IMPLEMENTATION DATE: 01/07/2019

Manager

SCD/DRAWING AFFECTED:
[AISC-1210H Series Surface Mount Shielded Power Inductor](#)

NOTIFICATION DATE:

01/07/2019

REV: A.

NEW REV: _B_

EFFECTIVITY DATE: 01/07/2019

ECN# M1045

REASON FOR CHANGE

Factory notice of discontinuation

DETAILS OF SPECIFICATION CHANGE:

Last Time Buy Feb 01, 2019
No Alternative Part available at this time.

APPLICATION INFORMATION

(Check one)

DISPOSITION OF CURRENT STOCK

- Scrap
- Transfer to: _____
- Use as is
- Return to vendor

ABRACON INTERNAL APPROVAL:

APPROVAL (PRES) _____ DATE 01/08/2019

_____ 01/08/2019

ENGINEERING VP _____ DATE 01/08/2019

PURCHASING MGR _____ DATE 01/08/2019

SALES VP _____ DATE 01/08/2019

QUALITY & PROCEESS IMPROVEMENT MGR: _____ DATE 01/08/2019

CUSTOMER APPROVAL (If Applicable)

ENGINEERING: NAME: _____ TITLE: _____ DATE: _____

BUYER/PURCHASING: NAME: _____ TITLE: _____ DATE: _____

SURFACE MOUNT UNSHIELDED POWER INDUCTORS



AISC - 1210H

FEATURES:

- Construction: Ceramic or Ferrite
- Excellent SRF
- High Frequency Design
- Excellent Q values

OPTIONS:

- Tape & Reel is standard
- Add L for no Cap, F for Ferrite Base
- Add G for Gold Plated Terminal
- Add S for Solder Plated Terminal

APPLICATIONS:


- Wireless Communications Equipment
- Networking System
- Computer Products and Peripherals

ELECTRICAL SPECIFICATIONS:

| Part Number | L (µH) | L Test Freq (MHz) | Q Min | Q Test Freq (MHz) | SRF Min (MHz) | R _{DC} Max (Ω) | I _{bc} Max (mA) |
|---------------------|--------|-------------------|-------|-------------------|---------------|-------------------------|--------------------------|
| 1210H Series | | | | | | | |
| AISC-1210H-R10M | 0.10 | 1 | 20 | 25.2 | 198 | 0.25 | 720 |
| AISC-1210H-R18M | 0.18 | 1 | 20 | 25.2 | 198 | 0.25 | 660 |
| AISC-1210H-R27M | 0.24 | 1 | 25 | 25.2 | 198 | 0.25 | 620 |
| AISC-1210H-R39M | 0.39 | 1 | 25 | 25.2 | 198 | 0.25 | 550 |
| AISC-1210H-R56M | 0.56 | 1 | 30 | 25.2 | 160 | 0.25 | 550 |
| AISC-1210H-R68M | 0.68 | 1 | 30 | 25.2 | 160 | 0.25 | 480 |
| AISC-1210H-R82M | 0.82 | 1 | 30 | 25.2 | 120 | 0.25 | 460 |
| AISC-1210H-1R0M | 1.0 | 1 | 20 | 1 | 100 | 0.40 | 450 |
| AISC-1210H-1R2M | 1.2 | 1 | 20 | 1 | 100 | 0.50 | 130 |
| AISC-1210H-1R5K | 1.5 | 1 | 20 | 1 | 75 | 0.60 | 400 |
| AISC-1210H-1R8K | 1.8 | 1 | 20 | 1 | 60 | 0.70 | 390 |
| AISC-1210H-2R2K | 2.2 | 1 | 20 | 1 | 50 | 0.80 | 370 |
| AISC-1210H-2R7K | 2.7 | 1 | 20 | 1 | 44 | 0.90 | 330 |
| AISC-1210H-3R3K | 3.3 | 1 | 20 | 1 | 40 | 1.0 | 300 |
| AISC-1210H-3R9K | 3.9 | 1 | 20 | 1 | 35 | 1.1 | 290 |
| AISC-1210H-4R7K | 4.7 | 1 | 20 | 1 | 32 | 1.2 | 270 |
| AISC-1210H-5R6K | 5.6 | 1 | 20 | 1 | 28 | 1.3 | 250 |
| AISC-1210H-6R8K | 6.8 | 1 | 20 | 1 | 25 | 1.5 | 240 |
| AISC-1210H-8R2K | 8.2 | 1 | 20 | 1 | 23 | 1.6 | 225 |
| AISC-1210H-100K | 10 | 1 | 35 | 1 | 20 | 1.8 | 190 |
| AISC-1210H-120K | 12 | 1 | 35 | 1 | 18 | 2.0 | 180 |
| AISC-1210H-150K | 15 | 1 | 35 | 1 | 16 | 2.2 | 170 |
| AISC-1210H-180K | 18 | 1 | 35 | 1 | 15 | 2.5 | 165 |
| AISC-1210H-220K | 22 | 1 | 35 | 1 | 14 | 2.8 | 150 |
| AISC-1210H-270K | 27 | 1 | 35 | 1 | 13 | 3.1 | 125 |
| AISC-1210H-330K | 33 | 1 | 35 | 1 | 12 | 3.5 | 115 |
| AISC-1210H-390K | 39 | 1 | 40 | 1 | 11 | 3.9 | 110 |
| AISC-1210H-470K | 47 | 1 | 40 | 1 | 11 | 4.3 | 100 |
| AISC-1210H-560K | 56 | 1 | 40 | 1 | 10 | 4.9 | 90 |
| AISC-1210H-680K | 68 | 1 | 40 | 1 | 9 | 5.5 | 85 |
| AISC-1210H-820K | 82 | 1 | 40 | 1 | 9 | 6.2 | 80 |
| AISC-1210H-101K | 100 | 1 | 40 | 0.796 | 8 | 6.8 | 78 |
| AISC-1210H-121K | 120 | 1 | 40 | 0.796 | 8 | 7.8 | 72 |
| AISC-1210H-151K | 150 | 1 | 40 | 0.796 | 7 | 9.2 | 70 |
| AISC-1210H-181K | 180 | 1 | 40 | 0.796 | 7 | 10 | 70 |
| AISC-1210H-221K | 220 | 1 | 40 | 0.796 | 6 | 12 | 65 |
| AISC-1210H-271K | 270 | 1 | 40 | 0.796 | 6 | 13 | 65 |
| AISC-1210H-331K | 330 | 1 | 40 | 0.796 | 5 | 13 | 65 |
| AISC-1210H-391K | 390 | 1 | 50 | 0.796 | 5 | 22 | 50 |
| AISC-1210H-471K | 470 | 0.1 | 50 | 0.796 | 5 | 25 | 45 |
| AISC-1210H-561K | 560 | 0.1 | 50 | 0.796 | 5 | 28 | 40 |

Note: 1. J=±5%, K=±10%, M=±20%

OUTLINE DRAWING:

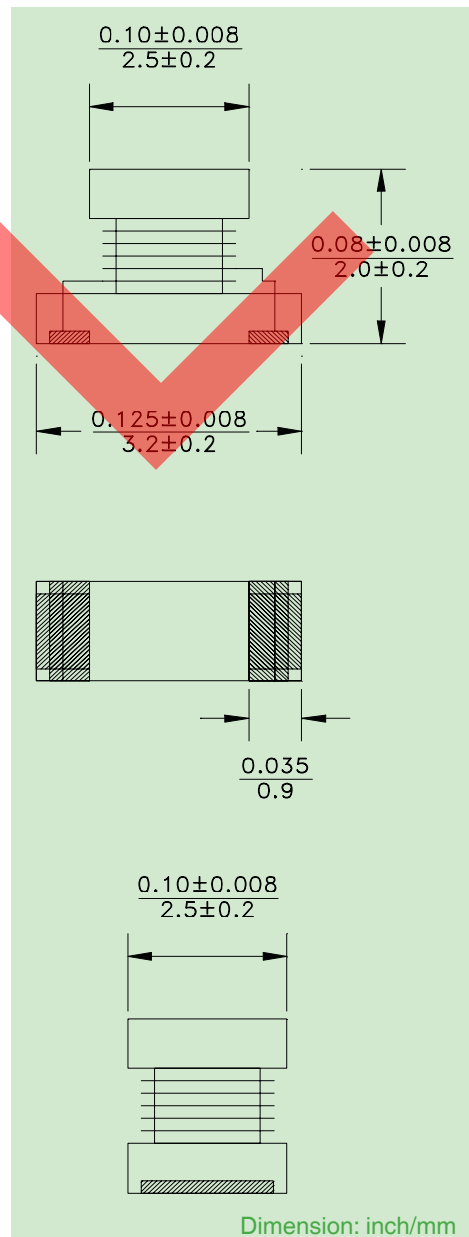

TECHNICAL INFORMATION:


- AISC-1210H-XXXX Typical Values Only (-XXX equal inductance value)
- Add -T for tape and reel
- Operating Temperature: **-40°C to +125°C**
- Inductance drop 10% typical at I_{DC}

TOLERANCES:

UNLESS OTHERWISE SPECIFIED:

inch: .XX: ± 0.015 .XXX: ± 0.010

mm: X,X: ±0,38 X,XX: ± 0.25



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)