

Unshielded Radial Power Inductor

AIUR-04 Series

 RoHS/RoHS II Compliant



11.2 x ϕ 8.5 mm

FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

APPLICATIONS:

- Switching Power Supplies
- Noise Filtering
- DC to DC Converters
- Electronic Household Appliances
- Buzzers and Alarm Systems
- Television and Audio Equipment

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	AIUR-04 Series
Operating temperature:	-25°C to + 85°C
Storage temperature:	-25°C to + 125°C

Part Number	Inductance	Tolerance	Q (Typ)	Test Frequency	DCR (Max)	Saturation Current (Max)	Temperature Rise Current (Max)	SRF (Min)	Inductance Code
Units	μ H	%		kHz	Ω	mA	mA	MHz	
Symbol	L	J			DCR	Isat	I _{DC}		
AIUR-04-101	100	J	30	796	2	200	200	5.3	101J
AIUR-04-121	120	J	30	796	2	200	200	4.5	121J
AIUR-04-151	150	J	30	796	2	200	200	3.8	151J
AIUR-04-181	180	J	30	796	3	200	200	3.3	181J
AIUR-04-221	220	J	30	796	3	200	200	2.9	221J
AIUR-04-271	270	J	30	796	3	200	200	2.6	271J
AIUR-04-331	330	J	30	796	4	200	200	2.3	331J
AIUR-04-391	390	J	30	796	4	200	200	2.1	391J
AIUR-04-471	470	J	30	796	4	200	200	1.9	471J
AIUR-04-561	560	J	30	796	4	200	200	1.7	561J
AIUR-04-681	680	J	30	796	4	200	200	1.6	681J
AIUR-04-821	820	J	30	796	6	200	200	1.4	821J
AIUR-04-102	1000	J	40	252	6	150	150	1.3	102J
AIUR-04-122	1200	J	40	252	9	150	150	1.2	122J
AIUR-04-152	1500	J	40	252	9	150	150	1.1	152J
AIUR-04-182	1800	J	40	252	9	100	100	1.0	182J
AIUR-04-222	2200	J	40	252	13	100	100	0.9	222J
AIUR-04-272	2700	J	40	252	13	100	100	0.8	272J
AIUR-04-332	3300	J	40	252	13	100	100	0.7	332J
AIUR-04-392	3900	J	40	252	13	50	50	0.7	392J
AIUR-04-472	4700	J	40	252	18	50	50	0.6	472J
AIUR-04-562	5600	J	40	252	18	50	50	0.6	562J
AIUR-04-682	6800	J	40	252	26	50	50	0.5	682J
AIUR-04-822	8200	J	40	252	26	50	50	0.5	822J
AIUR-04-103	10000	J	40	79.6	40	40	40	0.4	103J
AIUR-04-123	12000	J	40	79.6	40	40	40	0.4	123J
AIUR-04-153	15000	J	40	79.6	60	40	40	0.4	153J
AIUR-04-183	18000	J	40	79.6	60	30	30	0.3	183J
AIUR-04-223	22000	J	40	79.6	80	30	30	0.3	223J
AIUR-04-273	27000	J	40	79.6	80	30	30	0.3	273J

Test Conditions and equipments

DCR: QuadTech Milliohmmeter

Isat: 10% inductance drops from initial value

I_{DC}: The DC current at which the temperature rise is 40°C max

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 04.24.13**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Unshielded Radial Power Inductor

AIUR-04 Series

 RoHS/RoHS II Compliant



11.2 x ϕ 8.5 mm

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

Packing (200pcs / box)

AIUR-04-


Inductance Code

Please refer to the Electrical Spec Table

Tolerance

J: \pm 5%

OUTLINE DRAWING:

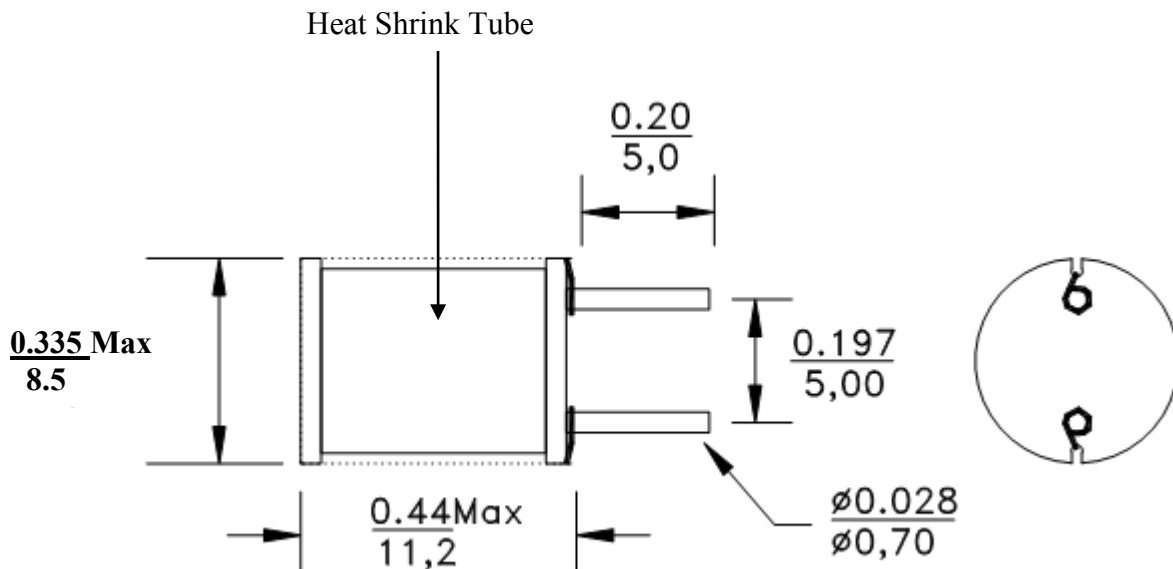

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 04.24.13**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-800 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)