

Unshielded Radial Power Inductor

AIUR-12 Series



RoHS/RoHS II compliant



7.20 x ϕ 8.20mm

FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

APPLICATIONS:

- Switching Power Supplies
- Noise Filtering
- DC to DC Converters
- Electronic Household Appliances
- Buzzers and Alarm Systems
- Television and Audio Equipment

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	AIUR-12 Series
Operating temperature:	-40°C to + 85°C
Storage temperature:	-55°C to + 85°C

Part Number AIUR-12- Inductance Code	Inductance	Tolerance	DCR (Max)	Rated Current (Max)	SRF (Max)	Q (Min)	Marking
Units	μ H	%	Ω	A	MHz		
Symbol	L	K	DCR	IDC			
AIUR-12-100	10	K	0.07	1.50	20.0	30	100K
AIUR-12-150	15	K	0.08	1.10	10.0	30	150K
AIUR-12-220	22	K	0.11	1.00	10.0	30	220K
AIUR-12-330	33	K	0.15	0.92	5.0	30	330K
AIUR-12-470	47	K	0.28	0.78	5.0	30	470K
AIUR-12-680	68	K	0.30	0.77	2.0	30	680K
AIUR-12-101	100	K	0.50	0.66	2.0	30	101K
AIUR-12-151	150	K	0.54	0.52	2.0	30	151K
AIUR-12-221	220	K	1.05	0.44	2.0	30	221K
AIUR-12-331	330	K	1.21	0.38	2.0	30	331K
AIUR-12-471	470	K	1.87	0.31	1.0	30	471K
AIUR-12-681	680	K	2.70	0.25	1.0	30	681K
AIUR-12-102	1000	K	3.80	0.17	1.0	30	102K
AIUR-12-152	1500	K	5.40	0.13	1.0	30	152K
AIUR-12-182	1800	K	6.80	0.12	1.0	30	182K
AIUR-12-222	2200	K	11.00	0.11	1.0	30	222K
AIUR-12-472	4700	K	18.00	0.07	0.3	30	472K

Test Conditions and equipments

Test frequency: 100KHz, 0.1Vrms

Rated Current: The DC current at which the inductance drops to 90% of its initial value or when temperature rise reaches 30°C, whichever is sooner.


PART IDENTIFICATION:

Packing (484pcs / Box)

AIUR-12-

Inductance Code
Please refer to the
Electrical Spec Table

Tolerance
K: \pm 10%



Unshielded Radial Power Inductor

AIUR-12 Series




RoHS
Compliant



7.20 x ϕ 8.20mm

OUTLINE DRAWING:

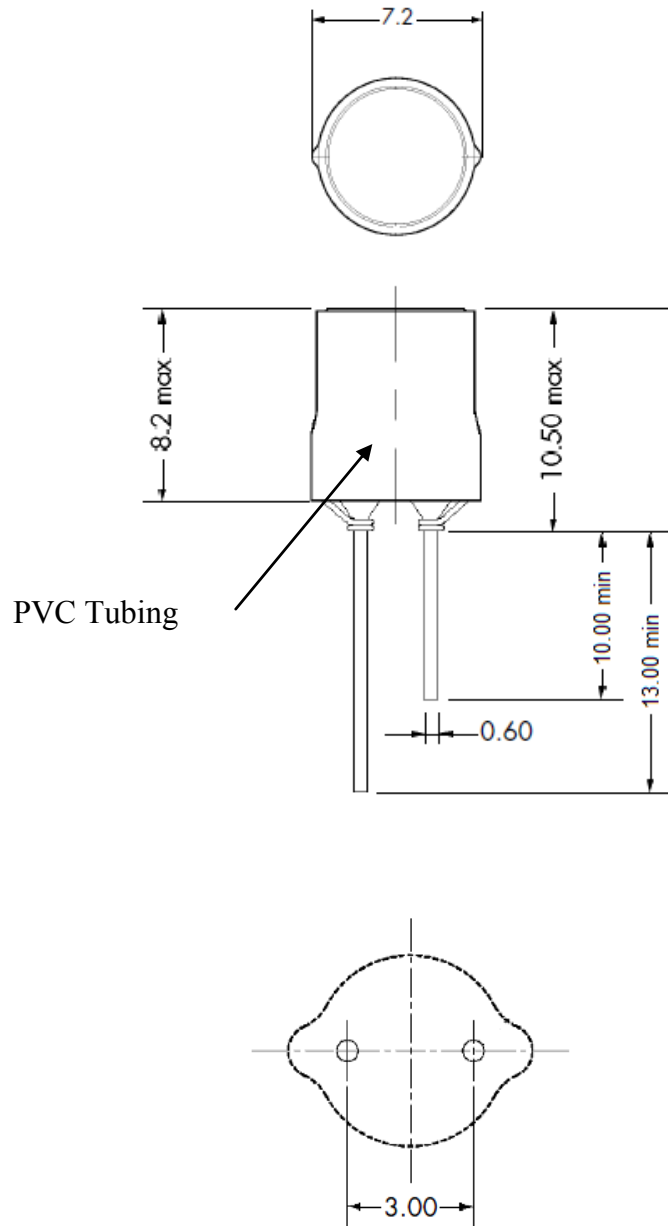

Dimension: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale

Revised: 10.06.14

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-800 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)