

GPS L1 + L2 Stacked Ceramic Patch Antenna



APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
 RoHS/RoHS II Compliant
 MSL = N/A: Not Applicable

Features

- Stacked patch for GPS L1 and L2
- Low VSWR
- Circular polarization
- Gain of 3.1 dBi (L1), 1.2 dBi (L2)

Applications

- GPS L1 and L2 applications
- Remote technology monitoring
- Geofencing
- Navigation
- Surveying and mapping systems
- Logistics
- UAVs and Drones
- Transportation

Electrical Specifications

| Parameters | L2 | | | L1 | | | Units | Notes |
|---------------------|------|-------------------|------|------|-------------------|------|-------|--|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | | |
| Operating Frequency | | 1227.60 ±1.023 | | | 1575.42 ±1.023 | | MHz | |
| VSWR | 2.0 | | | | | | | |
| Gain | | 1.2 | | | 3.1 | | dBi | |
| Axial Ratio | | | 7.0 | | | 5.0 | dB | @ ±40° |
| | | | 10.0 | | | 8.6 | | @ 40° < q < 90° & @ -90° < q < -40° |
| Impedance | 50 | | | | | | Ω | |

*Above mentioned values are for the ground plane size of 70 x 70 mm with an adhesive tape on it

Environmental Specifications

| Parameters | Description |
|-----------------------------------|-------------------|
| Operating Temperature | -40 °C to +85 °C |
| Storage Temperature | -40 °C to +105 °C |
| Frequency Temperature Coefficient | 20ppm/deg. °C |
| Humidity | 90 % to 95 % R.H. |

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2




35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Product Image



Product Dimensions

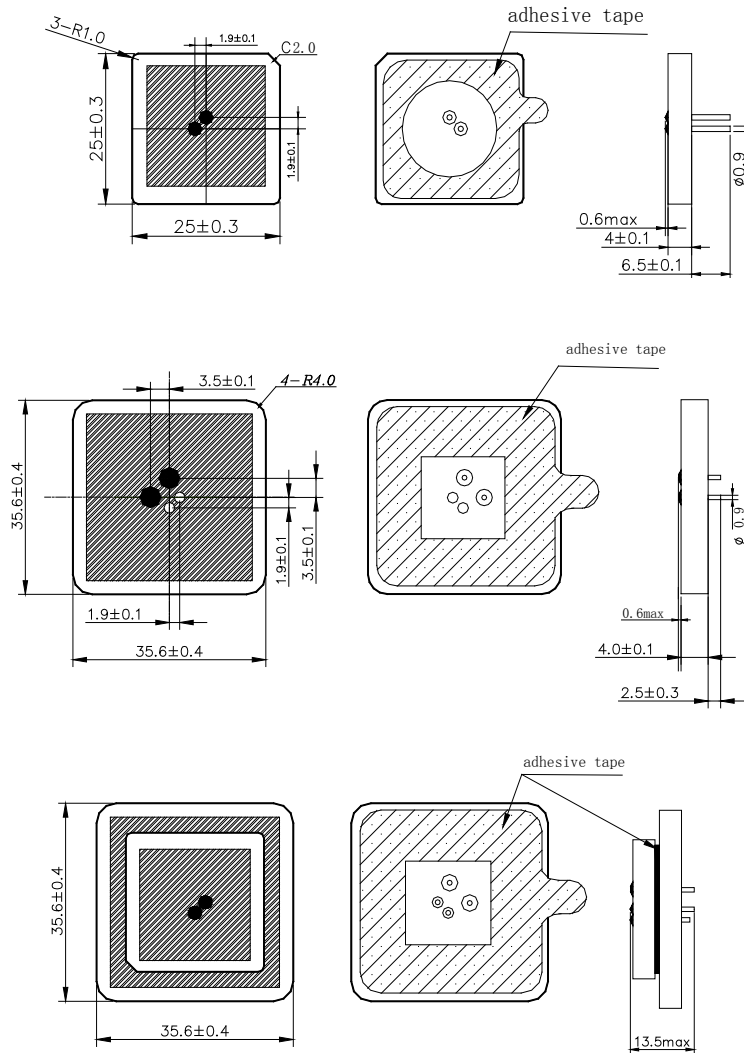

(Unit : mm)

GPS L1 + L2 Stacked Ceramic Patch Antenna





APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Return Loss and Impedance Characteristics

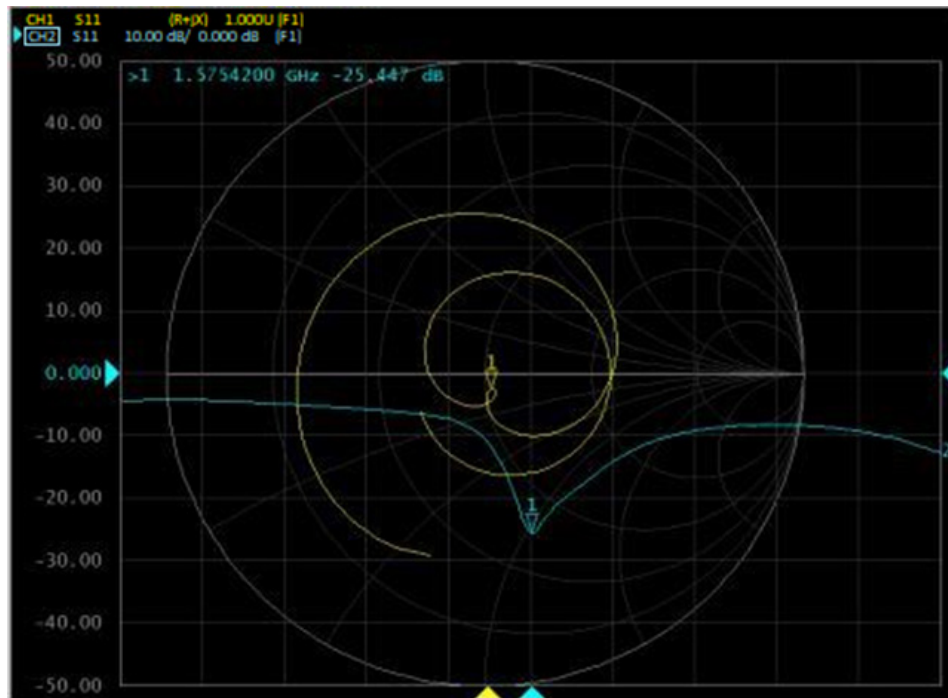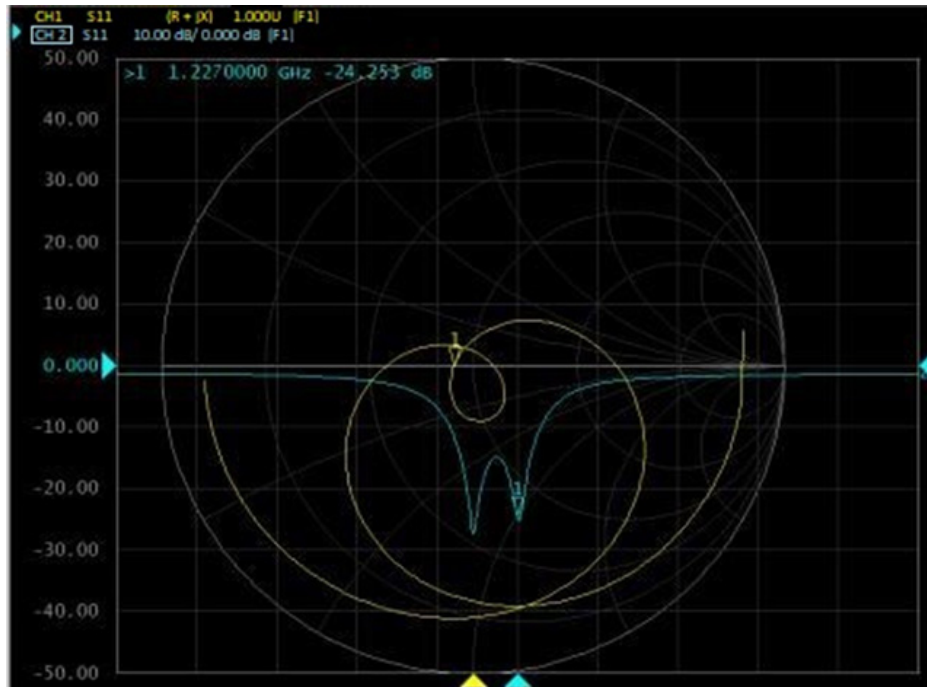

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

XZ Plane
Gain @ 1227 MHz

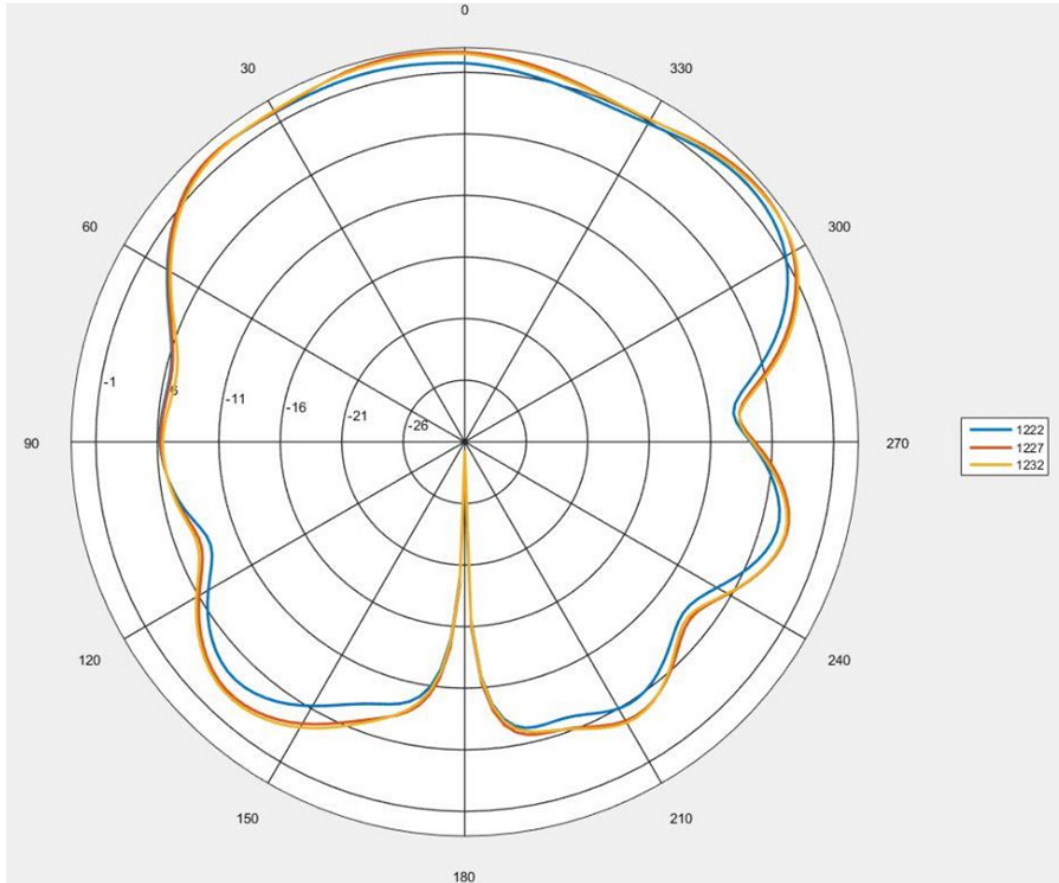

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

YZ Plane
Gain @ 1227 MHz

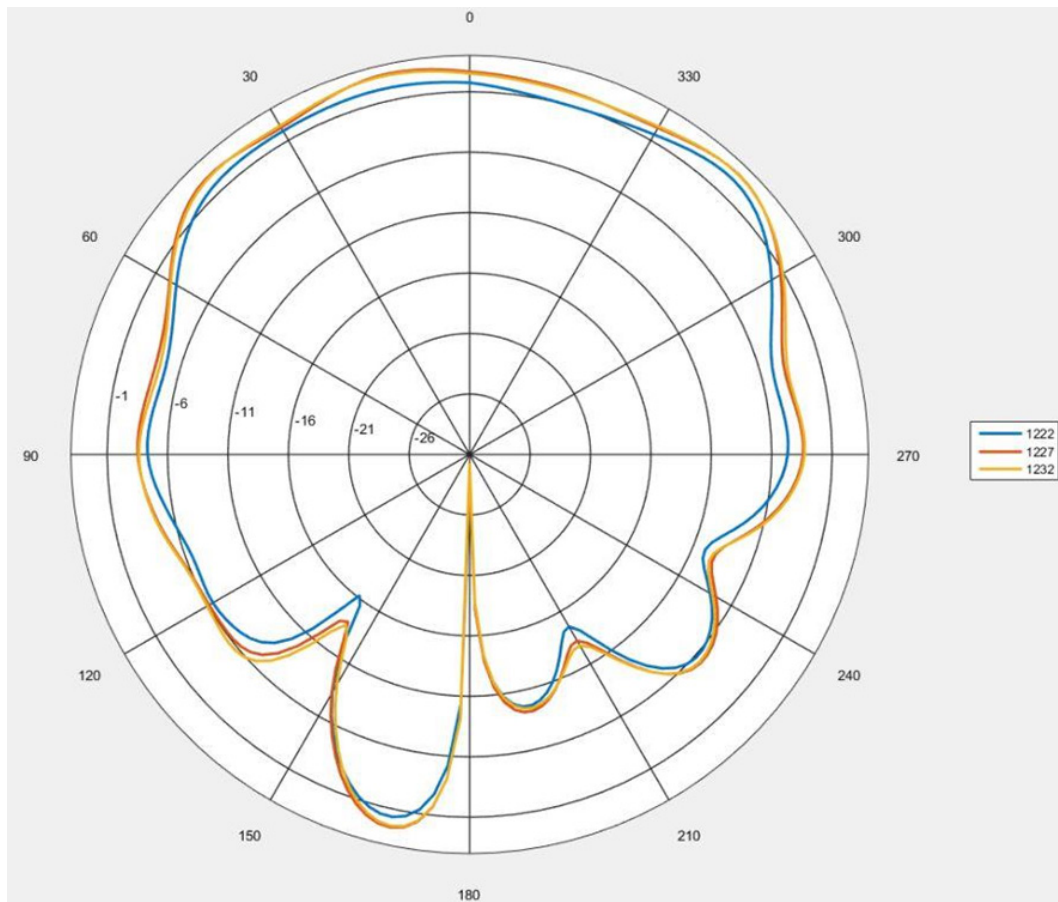

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

XY Plane

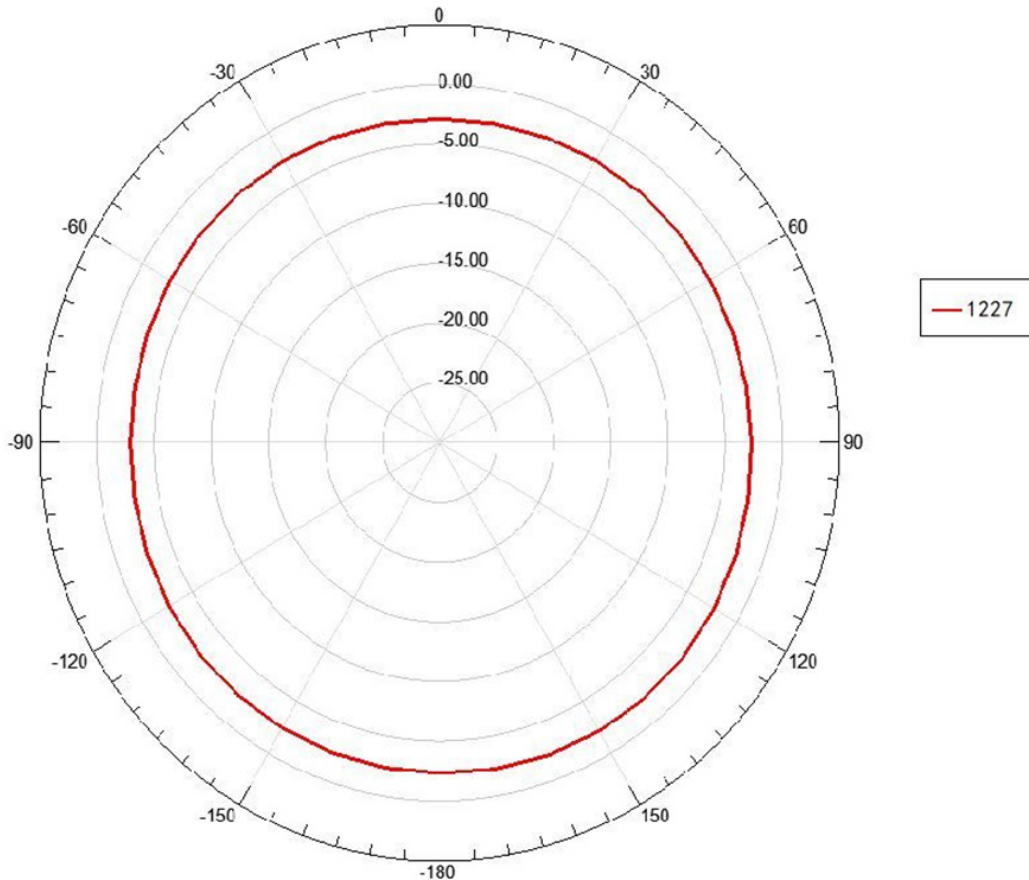

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

XZ Plane
Gain @ 1575 MHz

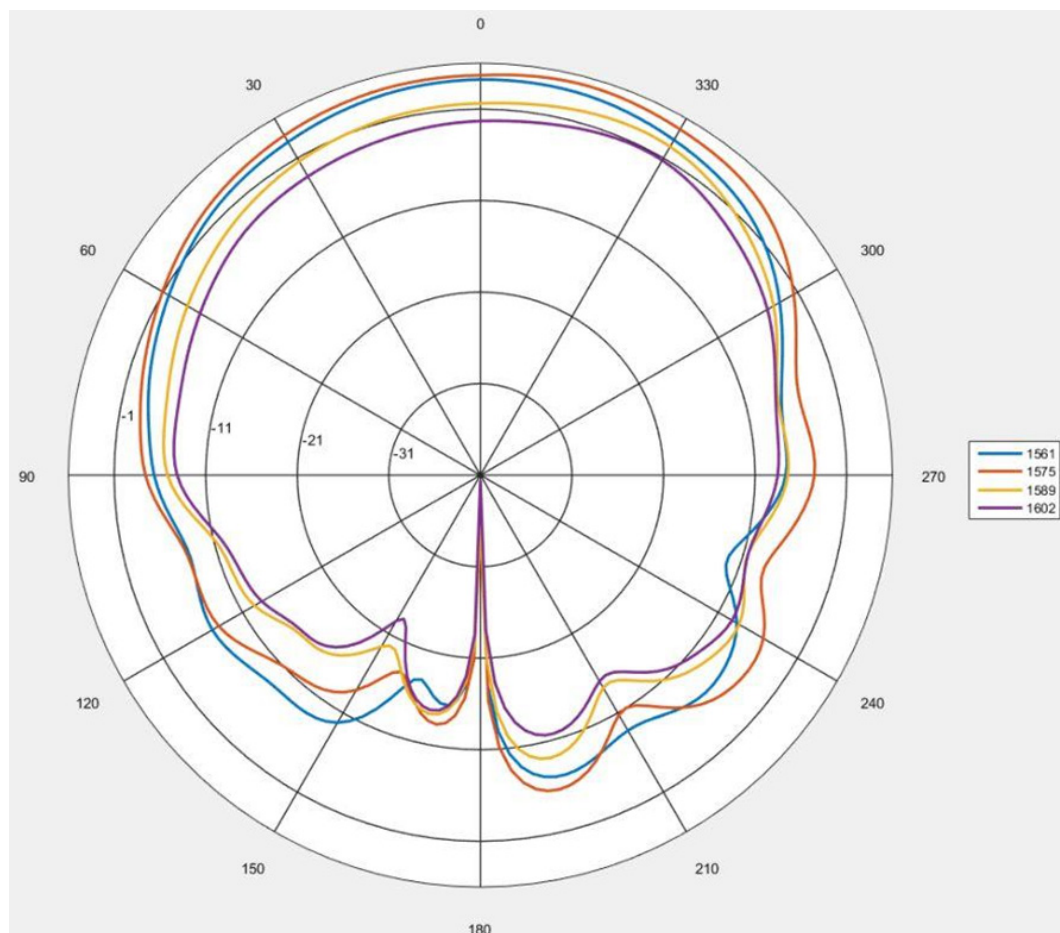

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

YZ Plane

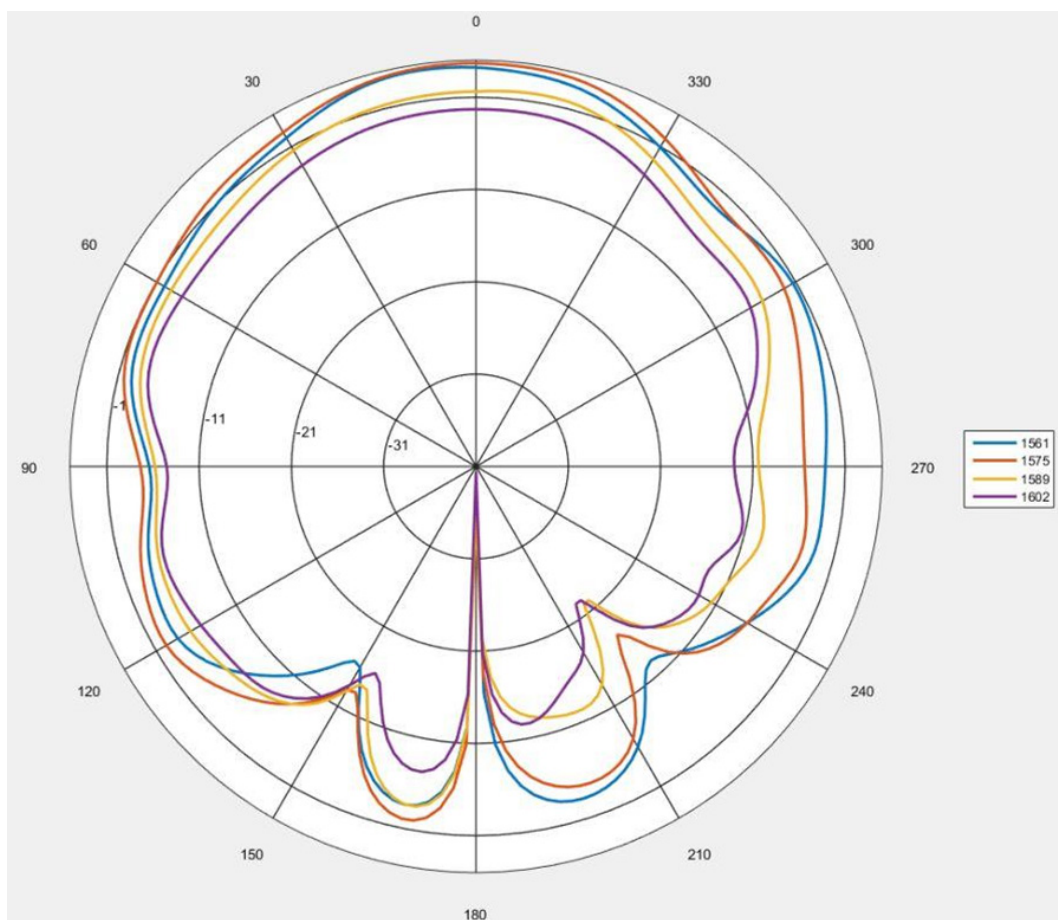

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

XY Plane

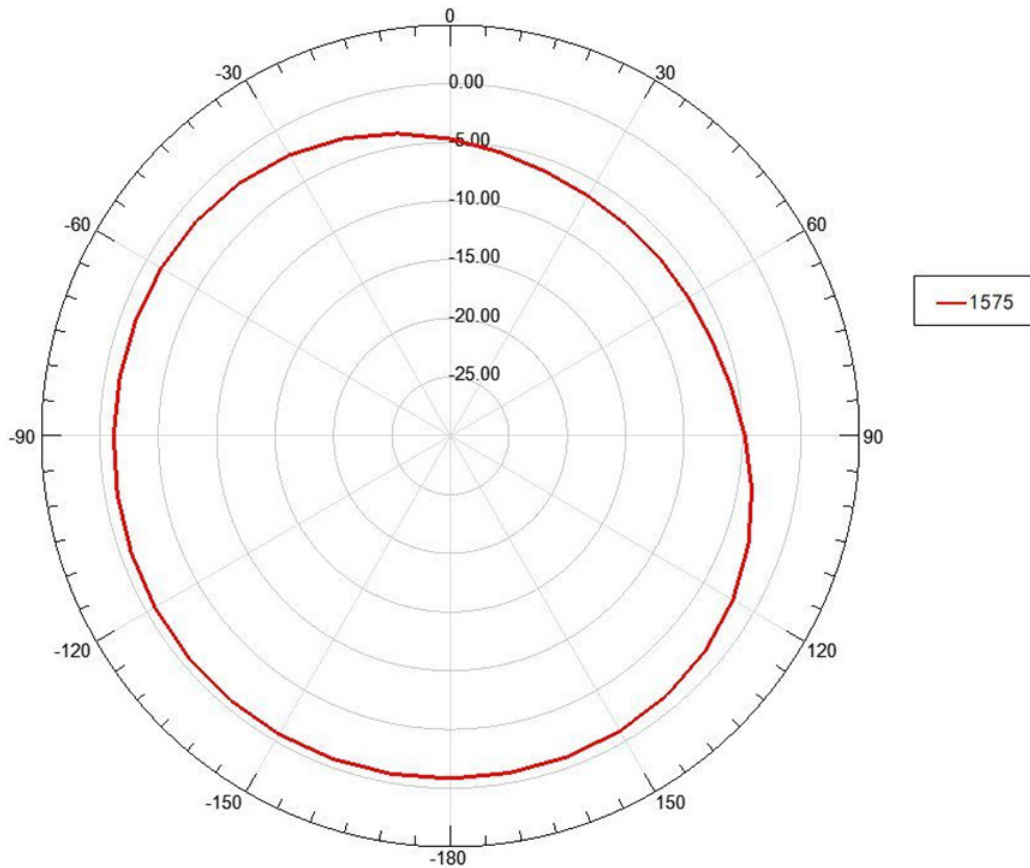

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

3D Pattern
Gain @ 1227 MHz

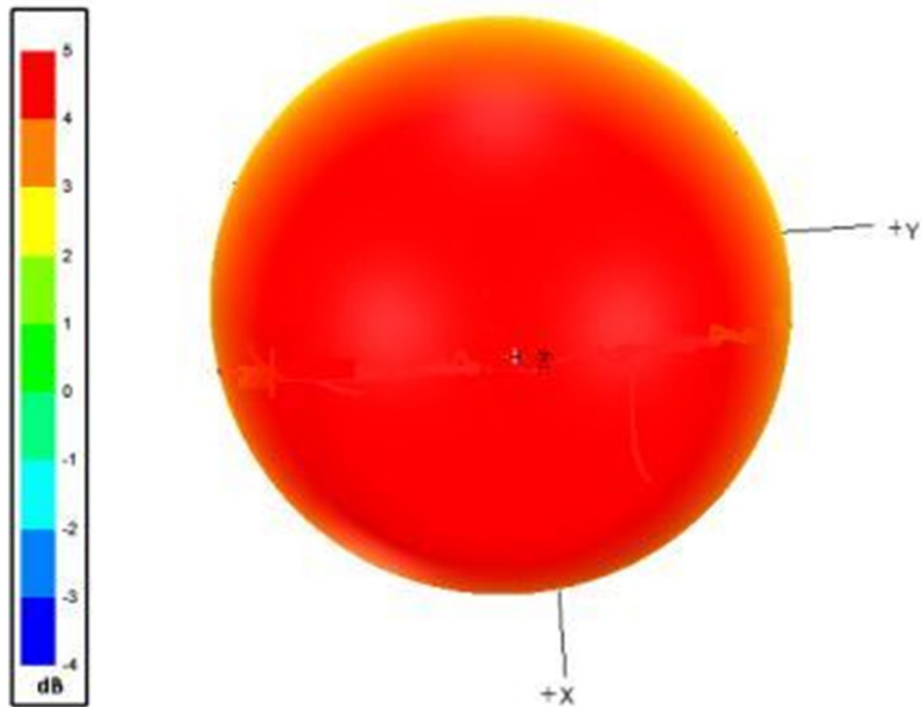

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Radiation Pattern

3D Pattern
Gain @ 1575 MHz

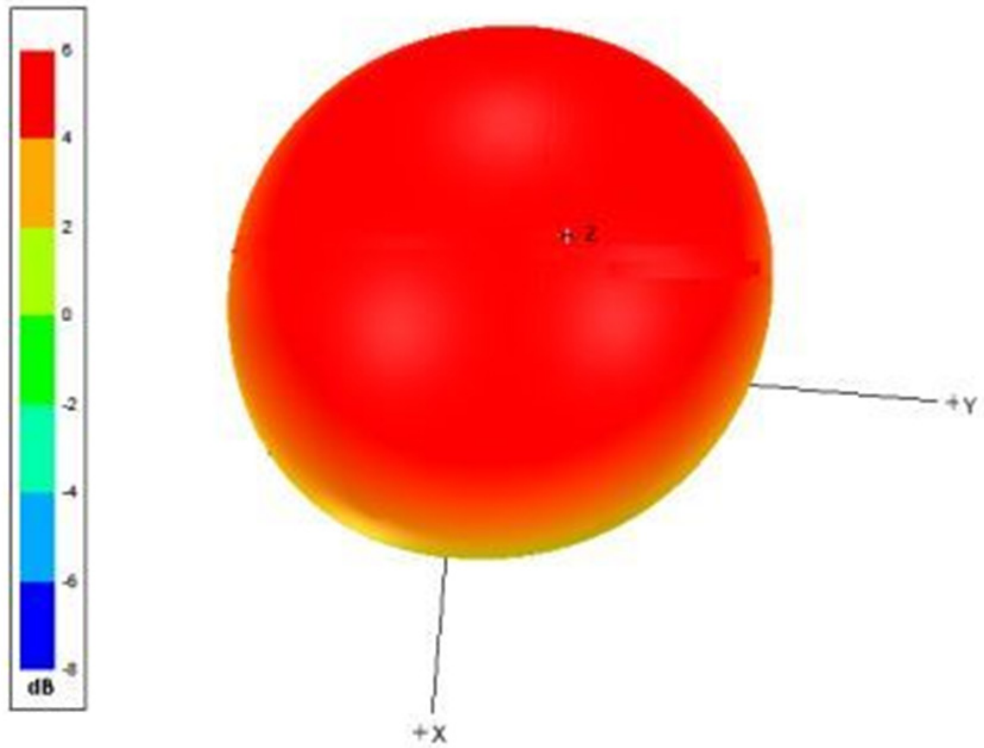

GPS L1 + L2 Stacked Ceramic Patch Antenna




APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Test Jig

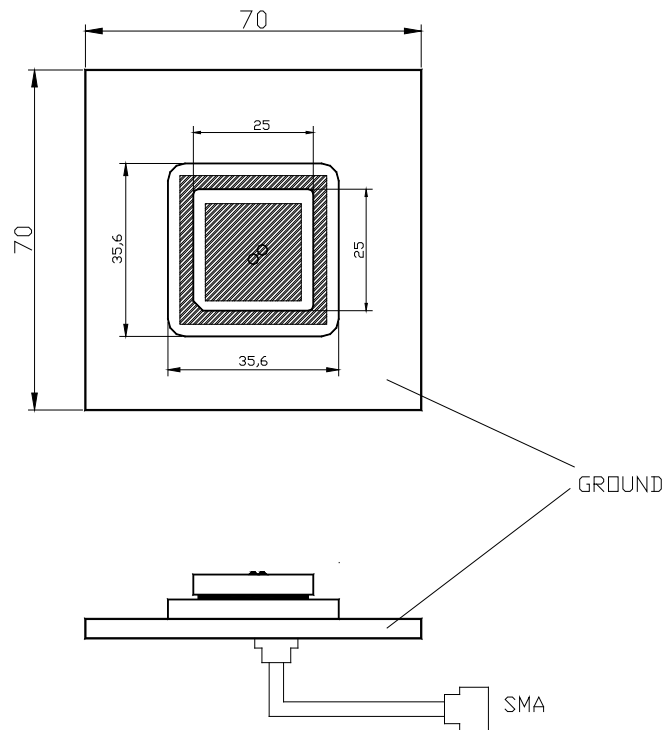

GPS L1 + L2 Stacked Ceramic Patch Antenna



APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
 RoHS/RoHS II Compliant
 MSL = N/A: Not Applicable

Reliability Test

| Item | Test Condition | Remark |
|----------------------------|--|--|
| Humidity Test | The device is subjected to 90% to 95% relative humidity $60^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 96 h to 98 h, then dry out at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and less than 65% relative humidity for 2 h to 4 h. After drying out, the device shall satisfy the specification in Table.1. | It shall fulfill the specifications in Table.1. |
| High Temperature Exposure | The device shall satisfy the specification in Table.1. after leaving at 105°C for 96 h to 98 h, provided it would be measured after 2 h to 4 h leaving in $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and less than 65% relative humidity. | It shall fulfill the specifications in Table.1. |
| Low Temperature Exposure | The device shall satisfy the specification in Table.1. after leaving at -40°C for 96 h to 98 h, provided it would be measured after 2 h to 4 h leaving in $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and less than 65% relative humidity. | It shall fulfill the specifications in Table.1. |
| Temperature Cycle | Subject the device to -40°C for 30 min followed by a high temperature of 105°C for 30 min cycling shall be repeated 5 times. At the room temperature for 1 h prior to the measurement. | It shall fulfill the specifications in Table.1. |
| Vibration | Subject the device to vibration for 2 h each in x, y and z axis with the amplitude of 1.5 mm, the frequency shall be varied uniformly between the limits of 10 Hz to 55 Hz. | It shall fulfill the specifications in Table.1. |
| Soldering Test | Lead terminals are heated up to $350^{\circ}\text{C} \pm 10^{\circ}\text{C}$ for 5 ± 0.5 s with brand iron and then element shall be measured after being placed in natural conditions for 1 h. No visible damage and it shall fulfill the specifications in Table.1. | It shall fulfill the specifications in Table.1. |
| Solder ability | Lead terminals are immersed in soldering bath of 260°C to 290°C for 3 ± 0.5 s. More than 95% of the terminal surface of the device shall be covered with fresh solder. | The terminals shall be at least 95% covered by solder. |
| Terminal Pressure Strength | A force of 2 kg is applied to each lead in axial direction for 10 ± 1 s (see drawing). No visible damage and it shall fulfill the specifications in Fig.1. | Mechanical damage such as breaks shall not occur. |

Fig. 1




Table 1

| Item | Specification After Test (MHz) |
|-------------------------|--------------------------------|
| Center Frequency change | ± 2.0 |

GPS L1 + L2 Stacked Ceramic Patch Antenna



APAKM3513-SGL2



35.6 x 35.6 x 13.5 mm
RoHS/RoHS II Compliant
MSL = N/A: Not Applicable

Packaging

A package has 144 antenna elements.

| Package Type | Quantity |
|----------------|-----------------|
| 1 Package base | 18 Antennas |
| 1 Vacuum bag | 2 Package bases |
| 1 Inner box | 1 Vacuum bag |
| 1 Package | 4 Inner boxes |

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 06-13-19

ABRACON IS
ISO9001-2015
CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [EXB144SM](#) [C37](#) [MAF94051](#) [GD35-17P-NF](#) [P1744](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#)