# **GPS Active Antenna Module- Adhesive Mount**

## APAMP-107

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



**MSL level: Not Applicable** 

#### **FEATURES:**

- High Reliability/Sensitivity
- Compact Size
- Easy to install (adhesive tape base)
- ROHS Compliant

## > TYPICAL APPLICATIONS:

- Automotive Navigation
- Automotive Monitoring
- · Personal Tracking

### STANDARD SPECIFICATIONS:

#### Antenna

Parameters	Min.	Тур.	Max.	Units	Note
Center Frequency	1574.40	1575.42	1576.44	MHz	
Bandwidth	10.0			MHz	
VSWR at Center Frequency			1.5:1		
Polarization Model		RHCP			(Right Hand Circular Polarization)
Impedance		50		Ω	
Gain		5		dBic	(Based on 70× 70mm ground plane)
Operating Temperature	-40		+80	°C	
Storage Temperature	-45		+85	°C	

#### Low Noise Amplifier (LNA)

Parameters	Min.	Typ.	Max.	Units	Note
Center Frequency	1574.40	1575.42	1576.44	MHz	
DC Voltage	3.0		5.0	V	
Gain	25	27	29	dB	(Without cable $+25 \pm 10$ )
Out-of-band Rejection (Absolute	25			dB	(fo+100MHz)
Value)	40			dB	(fo-100MHz)
Output VSWR			2.0		
Noise Figure			1.5		
DC current		13.5	15.5	mA	(At 5.0V)

### Overall (complete module including RF connector)

Parameters	Min.	Тур.	Max.	Units	Note
Center Frequency	1574.40	1575.42	1576.44	MHz	
Gain	25	27	29	dBic	(Based on 70x70mm ground plane.)
Output VSWR			2.0		
Impedance		50		Ω	





## **GPS Active Antenna Module- Adhesive Mount**


APAMP-107

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)




48.6 X 39.2 X 15.2mm


#### > ANTENNA'S IMPEDANCE AND RETURN-LOSS CHARACTERISTICS

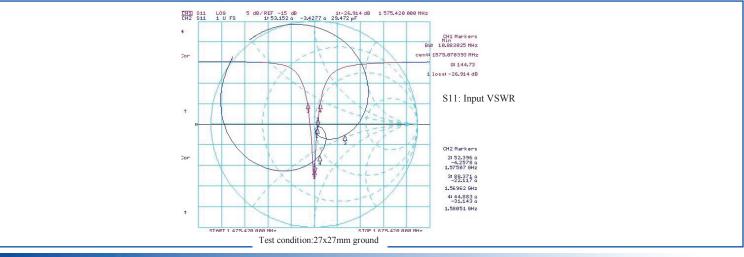

#### LNA REFLECTION PROFILE

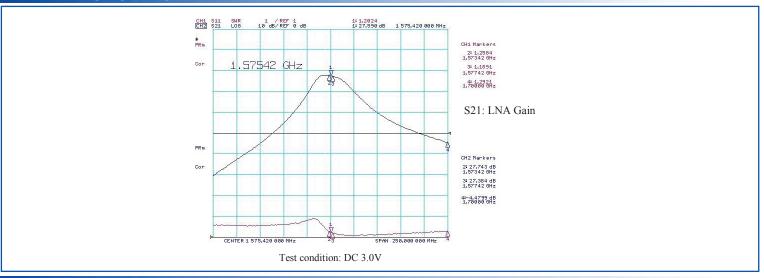

## **OUTLINE DRAWING:**

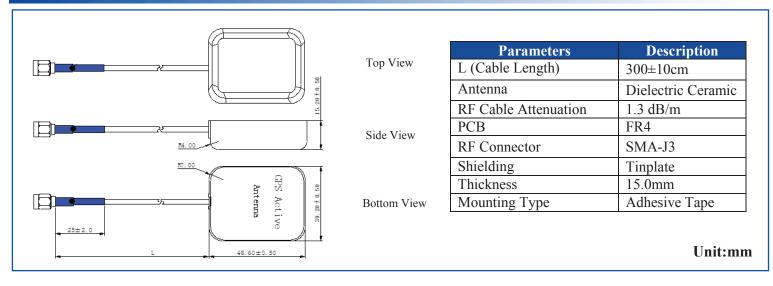





# **GPS Active Antenna Module- Adhesive Mount**

APAMP-107

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



## **PRODUCT IMAGE:**



#### > PACKAGING:

Each 475 x 215 x 215 mm size carton includes 100 pieces of antenna.





#### **CAUTION:**

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 GD35-17P-NF P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393