GPS Active Antenna Module - Adhesive Mount

APAMP-112

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



MSL level: Not Applicable

FEATURES:

- High Reliability/Sensitivity
- Compact Size
- Easy to install (adhesive base tape)
- ROHS Compliant

STANDARD SPECIFICATIONS:

Antenna

TYPICAL APPLICATIONS:


- Automotive Navigation
- Automotive Monitoring
- Personal Tracking

Parameters	Min.	Тур.	Max.	Units	Note
Center Frequency	1574.40	1575.42	1576.44	MHz	
Bandwidth	10.0			MHz	
VSWR			1.5:1		
Polarization Model		RHCP			(Right Hand Circular Polarization)
Impedance		50		Ω	
Gain		5		dBic	(Based on 70× 70mm ground plane)
Operating Temperature	-40		+80	°C	
Storage Temperature	-45		+85	°C	

Low Noise Amplifier (LNA)

Parameters	Min.	Тур.	Max.	Units	Note
Frequency	1574.40	1575.42	1576.44	MHz	
DC Voltage	3.0		5.0	V	
Gain	25	27	29	dB	$(+25^{\circ}C \pm 10^{\circ}C)$
Output VSWR			2.0		
Noise Figure			1.5		$(+25^{\circ}C \pm 10^{\circ}C)$
DC current		13.5	15.5	mA	(At 5.0V)

> ANTENNA'S IMPEDANCE AND RETURN-LOSS CHARACTERISTICS

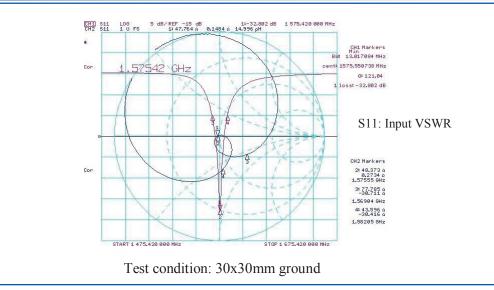





Visitwww.abracon.com forTerms & Conditions of Sale **Revised: 10.27.14** 30332Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com


GPS Active Antenna Module - Adhesive Mount

APAMP-112


RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



LNA REFLECTION PROFILE

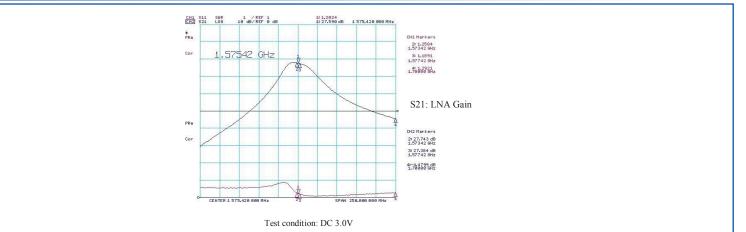

OUTLINE DRAWING:

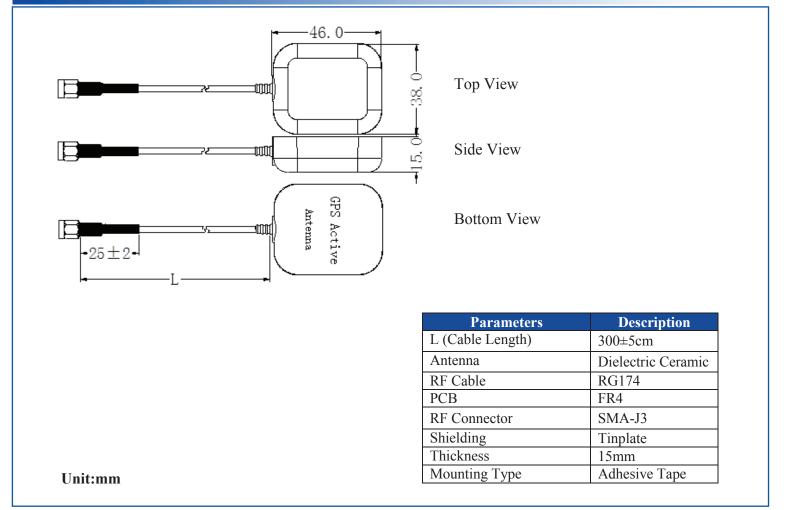





Visitwww.abracon.com forTerms & Conditions of Sale **Revised: 10.27.14** 30332Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

GPS Active Antenna Module - Adhesive Mount

APAMP-112



RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)

PRODUCT IMAGE:



PACKAGING:

Each 475 x 215 x 215 mm size carton includes 100 pieces of antenna.



CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Visitwww.abracon.com forTerms & Conditions of Sale **Revised: 10.27.14** 30332Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113

 30RSMM
 108-00014-50
 66089-2406
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3593B0100
 W3921B0100
 SIMNA-868
 SIMNA

 915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600-00060
 TRA9020S3PBN-001
 GD5W

 28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 EXB144SM
 C37
 MAF94051
 GD35-17P-NF
 P1744
 MA9-5N
 EXD420PL
 B1322NR

 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 AO-AGSM-OM54
 5200232
 MIKROE-2349
 WCM.01.0111
 MIKROE-2393