

GPS Active Antenna Module - Magnet Base



40.0 X 35.0 X 13.1mm

APAMP-128



ESD Sensitive

Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-1)

RoHS/RoHS II compliant

MSL level: Not Applicable

FEATURES:

- High Reliability/Sensitivity
- Compact Size
- Easy to install (magnet base)
- ROHS Compliant

TYPICAL APPLICATIONS:

- Automotive Navigation
- Automotive Monitoring
- Personal Tracking

STANDARD SPECIFICATIONS:


Antenna

| Parameters | Min. | Typ. | Max. | Units | Note |
|-----------------------|---------|---------|---------|--------------------|------------------------------------|
| Center Frequency | 1574.40 | 1575.42 | 1576.44 | MHz | |
| Bandwidth | 10.0 | | | MHz | |
| VSWR | | | 1.5:1 | | |
| Polarization Model | RHCP | | | | (Right Hand Circular Polarization) |
| Impedance | | 50 | | Ω | |
| Gain | | 2.0 | | dBic | (Based on 70× 70mm ground plane) |
| Operating Temperature | -40 | | +80 | $^{\circ}\text{C}$ | |
| Storage Temperature | -45 | | +85 | $^{\circ}\text{C}$ | |

Low Noise Amplifier (LNA)

| Parameters | Min. | Typ. | Max. | Units | Note |
|------------------|---------|---------|---------|-------|--|
| Center Frequency | 1574.40 | 1575.42 | 1576.44 | MHz | |
| DC Voltage | 3.0 | | 5.0 | V | |
| Gain | 24 | 27 | 30 | dB | (+25 $^{\circ}\text{C} \pm 10^{\circ}\text{C}$) |
| Output VSWR | | | 2.0 | | |
| Noise Figure | | | 1.5 | | (+25 $^{\circ}\text{C} \pm 10^{\circ}\text{C}$) |
| DC current | 5.5 | 8.5 | 11.5 | mA | (At 3.0V) |

ANTENNA'S IMPEDANCE AND RETURN-LOSS CHARACTERISTICS

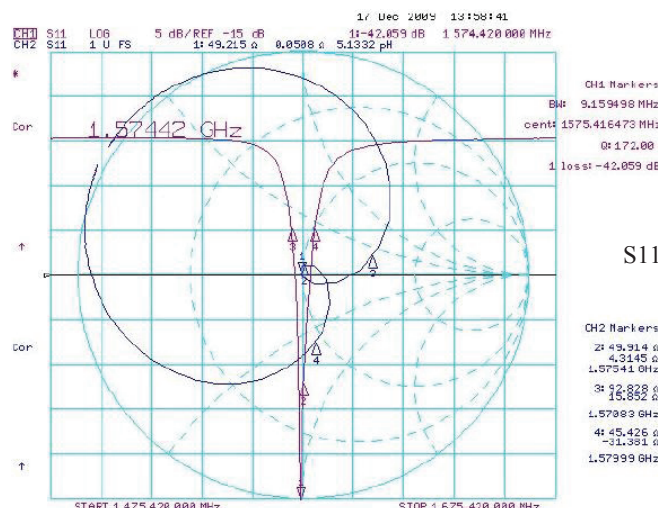

S11: Input VSWR

Test condition: 20x20mm ground



5101 Hidden Creek Ln Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 04-20-21

ABRACON IS
 ISO9001-2015
 CERTIFIED

GPS Active Antenna Module - Magnet Base



APAMP-128




ESD Sensitive

Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-1)

RoHS/RoHS II compliant


40.0 X 35.0 X 13.1mm

LNA REFLECTION PROFILE

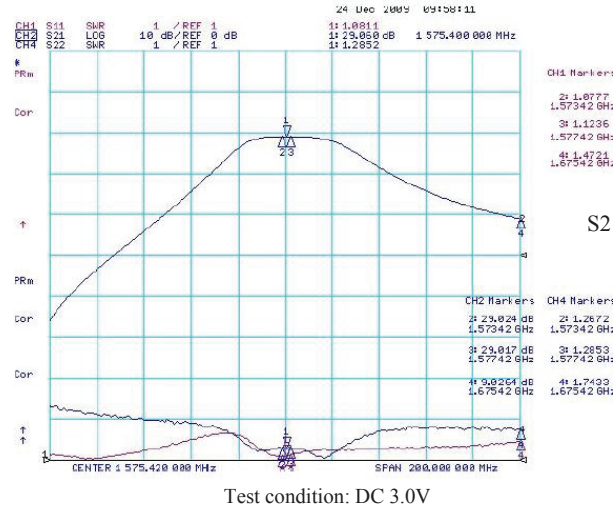

S21: LNA Gain

OUTLINE DRAWING:

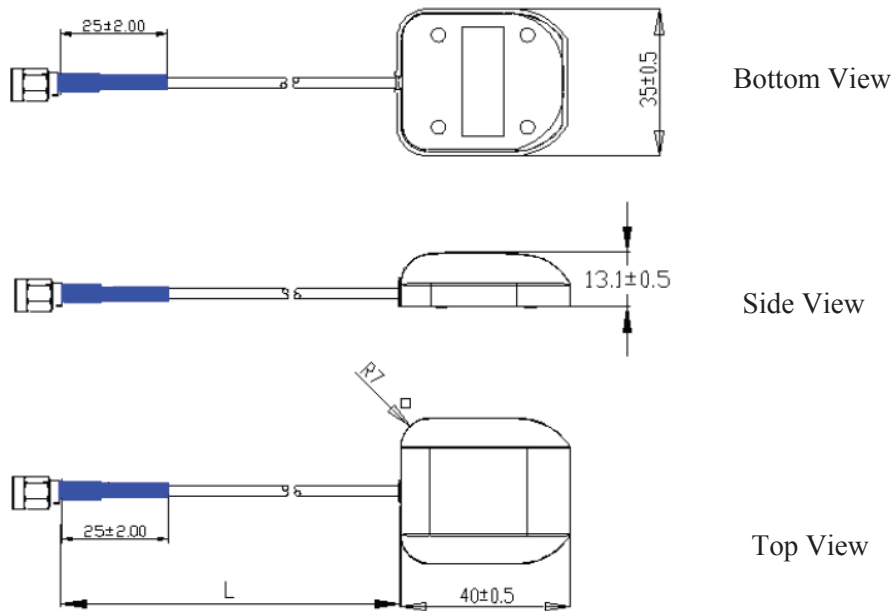

| Parameters | Description |
|------------------|--------------------|
| L (Cable Length) | 300±10cm |
| Antenna | Dielectric Ceramic |
| RF Cable | RG174 |
| PCB | FR4 |
| RF Connector | SMA-J3 |
| Shielding | Tinplate |
| Thickness | 13.5mm |
| Mounting Type | Magnet Base |

Unit:mm

GPS Active Antenna Module - Magnet Base

APAMP-128



ESD Sensitive

Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-1)

RoHS/RoHS II compliant



40.0 X 35.0 X 13.1mm

PRODUCT IMAGE:



PACKAGING:

Each 630 x 460 x 105 mm size carton includes 100 pieces of antenna.



CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 04-20-21

ABRACON IS
ISO9001-2015
CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [W3006VP](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [EXB144SM](#) [C37](#) [MAF94051](#) [GD35-17P-NF](#) [P1744](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#)