Multiband Antenna Module

APAMPSLJ-140

RoHS/RoHS II compliant



MSL level: Not Applicable

FEATURES:

- Passive Multiband Blade Antenna (699MHz ~ 2690MHz)
- Covering Cellular + 3G + 4G + Cellular + GPS & GLONASS + WiFi/Bluetooth + LTE 2.6GHz
- Internal Router Blade design
- Gain (3dBi) Typ
- VSWR 2:1 (GPS), 4:1 (2.5 \sim 2.6GHz), 5:1 2.5 \sim 2.69GHz
- Dimensions (171 x 38 x 13.8mm)
- Linear Polarization
- SMA Male connector
- RoHS/RoHS II compliant


> TYPICAL APPLICATIONS:


- Terminal Antenna for 2G / 3G / 4G and Cellular Gateways + WiFi.
- Wireless Routers
- LTE

> STANDARD SPECIFICATIONS:

Parameters	Min.	Тур.	Max.	Units	Note
Receiving Frequency	1559		1606	MHz	GPS/GLONASS/Galileo
	699		960	MHz	4G/LTE
	1710		2690	MHz	4G/LTE
VSWR			2:1		GPS
			4:1		@ 699-2600MHz
			5:1		@ 2500-2690MHz
Polarization Model		Linear			
Impedance		50		Ω	
Gain		3.0		dBi	
Operating Temperature	-40		+85	°C	

MEASUREMENTS - 3D SPHERICAL

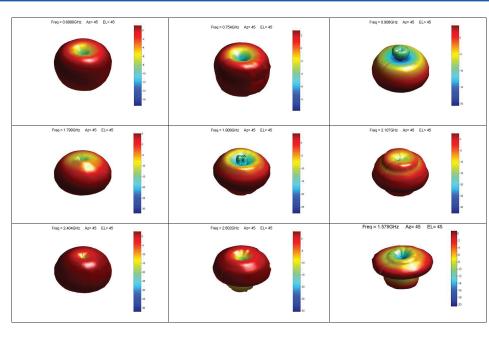







RoHS/RoHS II compliant





S11




Figure 1 - Log Mag at 0deg

Figure 2 - VSWR at 0deg






Figure 3 - Log Mag at 45deg

Figure 4 - VSWR at 45deg






Figure 5 - Log Mag at 90deg

Figure 6 - VSWR at 90deg





Visit www.abracon.com for Terms and Conditions of Sale

RoHS/RoHS II compliant





S11




Figure 7 - Log Mag at 0deg



Figure 9 - Log Mag at 45deg




Figure 11 - Log Mag at 90deg




Figure 8 - VSWR at 0deg




Figure 10 - VSWR at 45deg




Figure 12 - VSWR at 90deg






Multiband Antenna Module

APAMPSLJ-140


RoHS/RoHS II compliant



EFFICIENCY

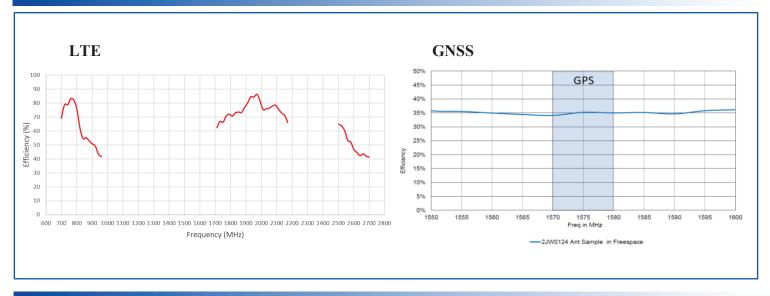

OUTLINE DIMENSION:

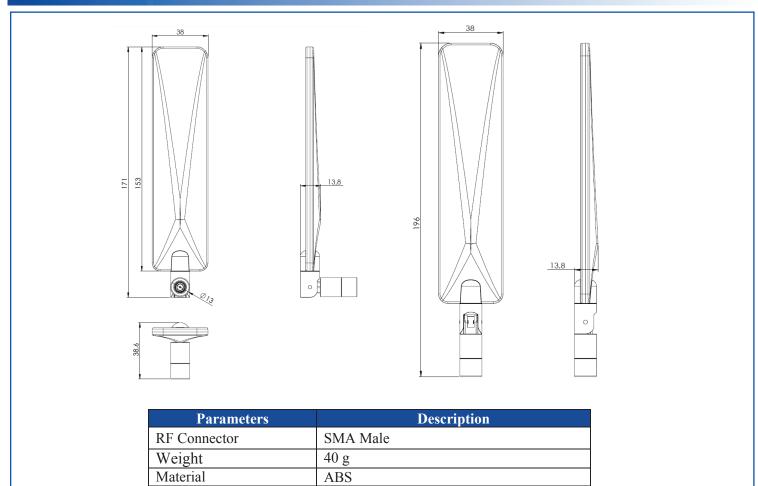

Black





Color

Multiband Antenna Module

APAMPSLJ-140

RoHS/RoHS II compliant



PRODUCT IMAGE:



PACKAGING:

Each antenna is individually packaged in a poly bag. 200pcs is the suggested quantity per 465 x 310 x 250mm box.



CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 W3006VP A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 GD35-17P-NF P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349