LONG RANGE RFID TAG IDEAL FOR METAL SURFACES



ART915X2509EP60-IC

25.0 x 9.0 x 3.7 mm



MSL=1

FEATURES

- 1.8 meters read range on metal surfaces
- Wide -30°C to 85°C operating temperature range
- UHF band operation 902 to 928MHz
- Matched for lowest return loss at 915MHz
- Tag incorporates matched Alien H3 RFIC
- 25.0 x 9.0 x 3.7mm height ceramic tag
- ISO 18000-6C/EPC Class1 Gen2 compliant
- Peel & Stick easy installation
- Suitable for non-metal surfaces
- Robust, long life over wide temperature range

APPLICATIONS

- Asset tracking: vehicles, machinery, tools, steel containers, servers, etc.
- Product inventory management: metallic assemblies, chassis, doors, equipment, etc.
- Industrial Internet of Things (IIoT)
- Automatic Vehicle Identification (AVI)
- Wildlife Identification and Waste Management
- Long distance RFID /Non-Stop Access Control

STANDARD SPECIFICATIONS

PARAMETERS	MINIMUM	TYPICAL	MAXIMUM	UNITS	NOTE
Range of Receiving Frequency	902-928			MHz	
Frequency of Lowest Return Loss	915±5			MHz	(Based on 200 x 200 mm GND Plane)
IC Protocol	ISO 18000-6C/EPC Class1 Gen2				
Memory	96 EPC			Bits	
		512 User		Bits	
IC Type	Alien H3				
Reading Range		1.8		m	
Working Temperature	-30		+85	°C	
Storage Temperature	-40		+110	°C	
Frequency Temperature Coefficient		0±10		ppm/°C	
ESD (HBM)			2	KV	2KV Class 2 HBM



5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858

For terms and conditions of sale please visit: www.abracon.com

ISO9001-2015 CERTIFIED

ABRACON IS

07/19/2018

REVISED:

LONG RANGE RFID TAG IDEAL FOR METAL SURFACES



ART915X2509EP60-IC


25.0 x 9.0 x 3.7 mm



MSL=1


MECHANICAL DIMENSIONS (ALL DIMENSIONS ARE IN mm)

Tolerances are ±0.2mm, unless otherwise specified*

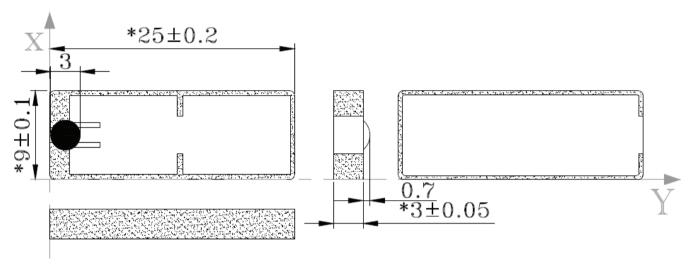

Mounting: Mounted with adhesive/tape (not included).

PACKAGING

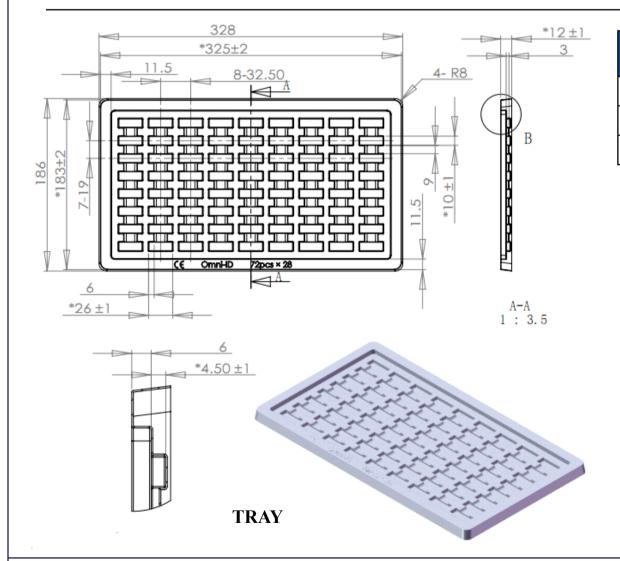

PACKAGE TYPE	QUANTITY		
Tray	72 pcs/tray		
Vacuum Bag	504pcs/ Vacuum Bag		
MOQ	504pcs		

REVISED: 07/19/2018

ABRACON[®]

5101 Hidden Creek Lane Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sale please visit: www.abracon.com

ABRACON IS ISO9001-2015 CERTIFIED

LONG RANGE RFID TAG IDEAL FOR METAL SURFACES



ART915X2509EP60-IC

25.0 x 9.0 x 3.7 mm



MSL=1

CAUTION

- 1. Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- 2. Do not expose the component to open flame.
- 3. This specification applies to the functionality of the component as a single unit. For optimal performance, in-circuit validation is recommended.
- 4. Electrostatic sensitive device; observe standard precautions for handling.

NOTES

- 1. The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2. ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3. In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4. When changing your production process post-validation, please notify ABRACON immediately.
- 5. ABRACON's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property damage.
- 6. All specifications and Marking will be subject to change without notice.

REVISED:

07/19/2018

ABRACON IS ISO9001-2015 CERTIFIED



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NFC/RFID Tags & Transponders category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below:

PCF7941ATSM2AB120, PNEV512B,699 V680-D1KP54T V680S-A40 50M PN7120A0EV/C10801Y TRPGR30ATGA SPS1M003B SPS1M003A SPS1M002B SPS1M002A V680S-A40 10M V680-D1KP66T ATA5577M2330C-DBQ SL2S5302FTBX LXMSJZNCMD-217 60208 60170 P5DF081X0/T1AD2060 MF1S5030XDA8/V1J MF1S7030XDA4/V1J HT1MOA4S30/E/3J HT2MOA4S20/E/3/RJ MFRC52302HN1,157 TRPGR30ATGB NRF51822-QFAA-R 20926410601 CLRC66303HNE ART915X1620TX16-IC ART915X2117225TX21-IC 28448 ART923X1015YZ10-IC ART868X130903TX13 ART868X25275YZ25 ART915X0505030P-IC ART915X100202TO-IC ART915X100503JA-IC ART915X130930TX13-IC ART915X250903AM-IC ART915X2509EP60-IC ART915X252503MA-IC ART915X25275YZ25 ART915X25275YZ25 ART915X25275YZ25 ART915X25275YZ25 ART915X2509EP60-IC ART915X252503MA-IC ART915X25275YZ25 ART915X25275YZ25-IC ART923X1015YZ10 AS3932-BTST AS3933-BTST 20926410802 LXMSJZNCMF-198 MIKROE-779 13356-0571 13356-1151