

# Ultra Miniature 1.6 x 1.2mm 32.768 kHz Crystal Oscillator



ASAKMP



ESD Sensitive



1.6 x 1.2 x 0.6mm  
RoHS/RoHS II Compliant  
MSL - N/A

## FEATURES

- 32.768 kHz crystal oscillator
- Excellent  $\pm 10$  ppm stability over temperature
- Excellent  $\pm 27$  ppm all inclusive stability
- Compact form factor 1.6 x 1.2 mm
- Output enable/disable function
- Available over industrial operating temperature range (-40°C to +85°C)
- Supply voltage options 3.3V, 2.5V, 1.8V

## APPLICATIONS

- Enhanced accuracy timekeeping
- RTC reference clock
- Medical devices
- Utility metering
- Wearables
- IoT
- Industrial timing
- Industrial wearables
- ULP input device

## Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	32.768			kHz	
Operating Temperature Range (OTR)	-40		+85	°C	See options
Storage Temperature	-55		+125	°C	
Frequency Accuracy $\Delta f/f_0$ vs Tolerance (@+25 $\pm 3^\circ\text{C}$ )	-7		+7	ppm	See options
vs Post Reflow (@+25 $\pm 3^\circ\text{C}$ )	-2		+2		
vs Temperature (ref. to +25 $\pm 3^\circ\text{C}$ )	-15		+15		See options
vs Aging (Over 10 Years @+25 $\pm 3^\circ\text{C}$ )	-7		+7		
All Inclusive Stability Over 10-Year Product Life (-20°C to +70°C)	-27		+27		See options
Power Supply Voltage ( $V_{dd}$ )	2.97	3.3	3.63	V	Option 1
	2.25	2.5	2.75		Option 2
	1.62	1.8	1.98		Option 3
		1.60 ~ 3.63			Option 4
Supply Current ( $I_{DD}$ )		< 27.0	30.0	$\mu\text{A}$	$V_{dd} = 3.0\text{V}$ , No Load
Stand Current Consumption ( $I_{STBY}$ )			3.0	$\mu\text{A}$	
Output Load			15.0	pF	CMOS
Output Logic Levels	$V_{OH}$	$0.9 * V_{dd}$		V	$I_{OH} = -1 \text{ mA}$
	$V_{OL}$		$0.1 * V_{dd}$		$I_{OL} = +1 \text{ mA}$
Standby Logic Levels	$V_{IH}$	$0.7 * V_{dd}$			Oscillation
	$V_{IL}$		$0.3 * V_{dd}$		Hi Z
Symmetry @1/2 $V_{dd}$	45.0	50.0	55.0	%	$V_{TH} = 0.5 V_{dd}$
Start-up Time		< 2.25	7.0	ms	$V_{dd} = 3.3\text{V}$
		< 3.00	10.0		$V_{dd} = 1.8\text{V}$
Rise/Fall Time ( $T_r/T_f$ )			200.0	ns	10% $V_{dd}$ to 90% $V_{dd}$



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08.16.2018

ABRACON IS  
ISO9001-2015  
CERTIFIED

# Ultra Miniature 1.6 x 1.2mm 32.768 kHz Crystal Oscillator



ASAKMP



ESD Sensitive



1.6 x 1.2 x 0.6mm  
RoHS/RoHS II Compliant  
MSL - N/A

## Options and Part Identification

ASAKMP [ ] [ ] - 32.768KHz [ ]


Supply Voltage	Option*	Set Tolerance	Operating Temp.	Stability Over Temperature	All Inclusive Stability Over 10-Year Product Life**	Packaging
A: 3.3V	1	±7 ppm	-20°C to +70°C	±10 ppm	±27 ppm Maximum	Blank: Bulk T3: 3K pcs/reel
B: 2.5V	2	±10 ppm	-20°C to +70°C	±10 ppm	±30 ppm Maximum	
C: 1.8V	3	±7 ppm	-20°C to +70°C	±15 ppm	±32 ppm Maximum	
D: 1.60 ~ 3.63V	4	±10 ppm	-20°C to +70°C	±15 ppm	±35 ppm Maximum	
	5	±7 ppm	-40°C to +85°C	±15 ppm	±32 ppm Maximum	
	6	±10 ppm	-40°C to +85°C	±15 ppm	±35 ppm Maximum	
	7	±7 ppm	-40°C to +85°C	±20 ppm	±37 ppm Maximum	
	8	±10 ppm	-40°C to +85°C	±20 ppm	±40 ppm Maximum	

\* For custom tolerance, operating temperature and stability, please contact Abracon.

\*\* All-Inclusive Stability: Set-tolerance, shift through reflow, stability over temperature and aging over 10-year product life.

## Typical Current Consumption

Current Consumption Over Temperature @  $V_{dd} = 3.3V, 25 \pm 3^\circ C$

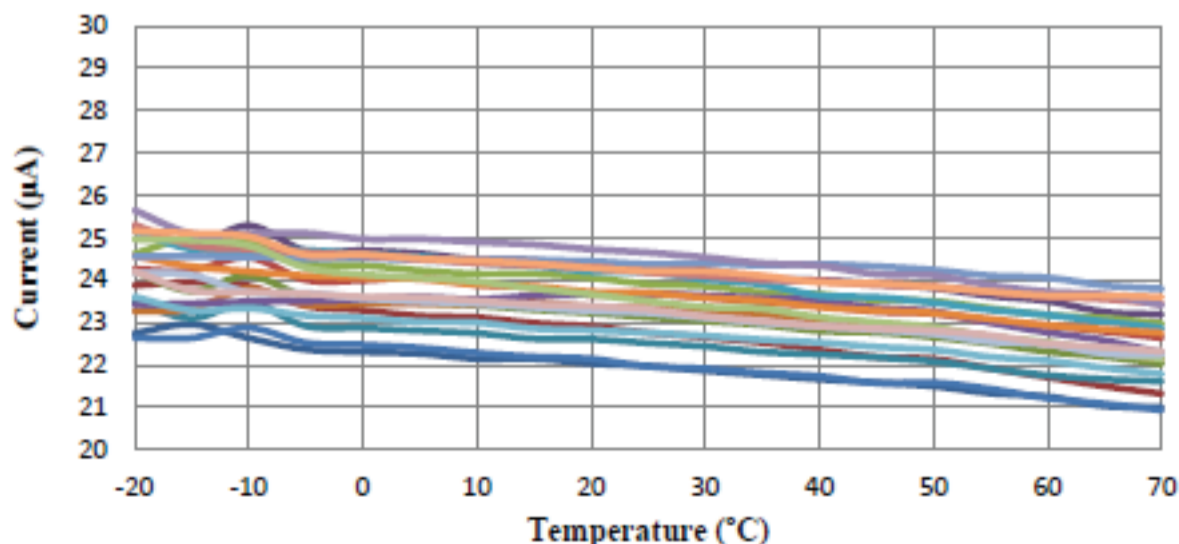

5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08.16.2018

ABRACON IS  
ISO9001-2015  
CERTIFIED

# Ultra Miniature 1.6 x 1.2mm 32.768 kHz Crystal Oscillator



ASAKMP




ESD Sensitive



1.6 x 1.2 x 0.6mm  
RoHS/RoHS II Compliant  
MSL - N/A


## Typical Frequency Stability Over Temperature:

Frequency Stability Over Operating Temperature  
Normalized to measured frequency @ 25°C

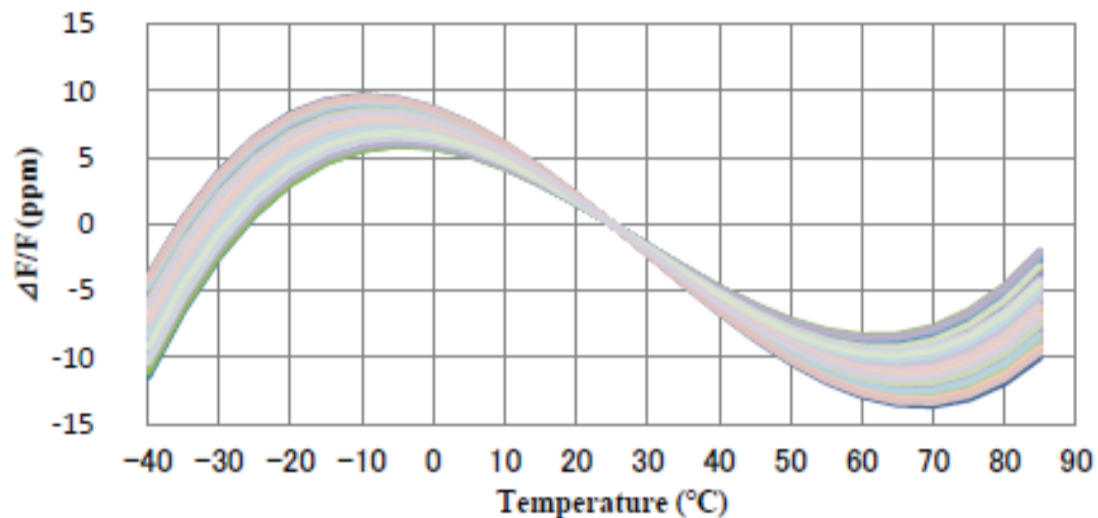


## Typical Current Consumption ( $I_{dd}$ )

Current Consumption vs. Supply Voltage @ 25 ±3°C

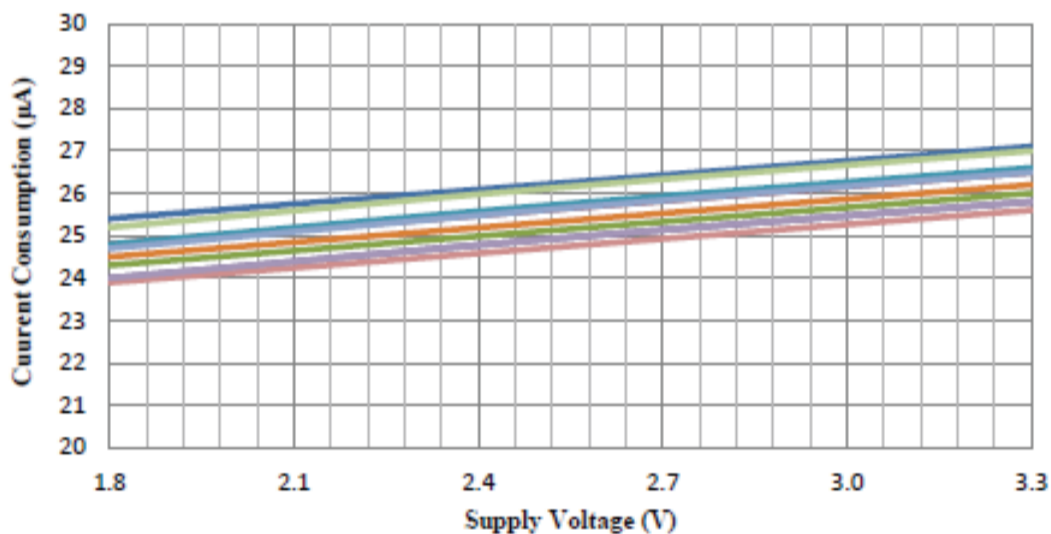

## Typical Start-Up Time @ $V_{dd} = 1.8V, 25 \pm 3^\circ C$

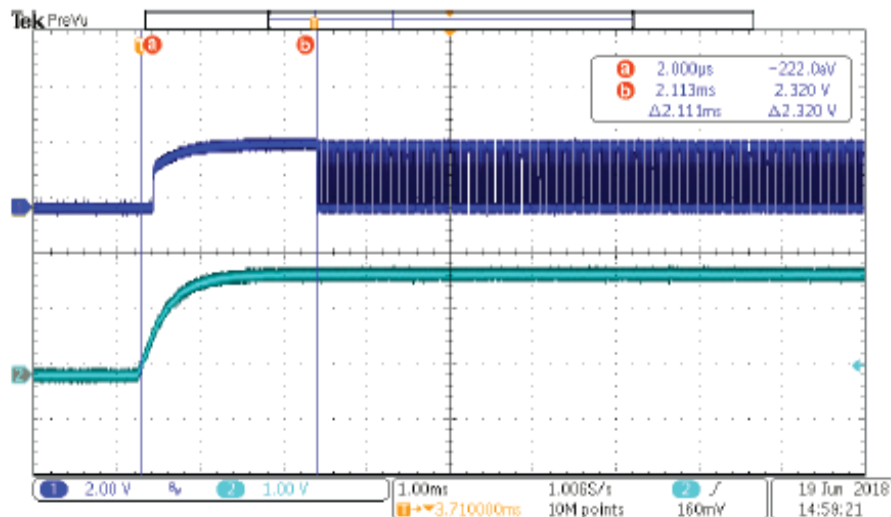

5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08.16.2018

ABRACON IS  
ISO9001-2015  
CERTIFIED



ASAKMP







ESD Sensitive



1.6 x 1.2 x 0.6mm  
RoHS/RoHS II Compliant  
MSL - N/A

## Mechanical Dimensions

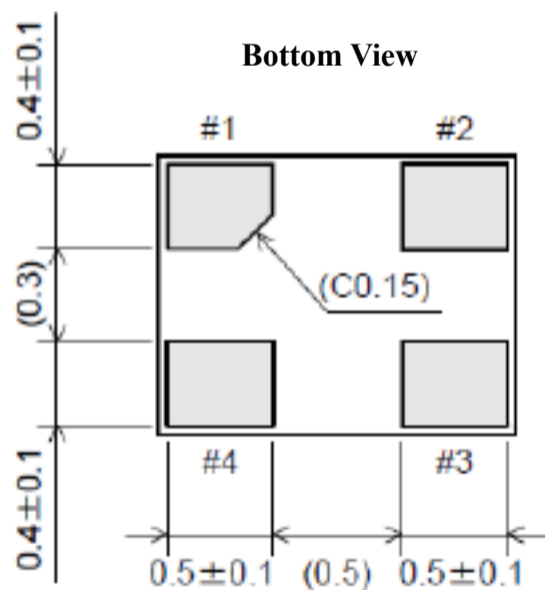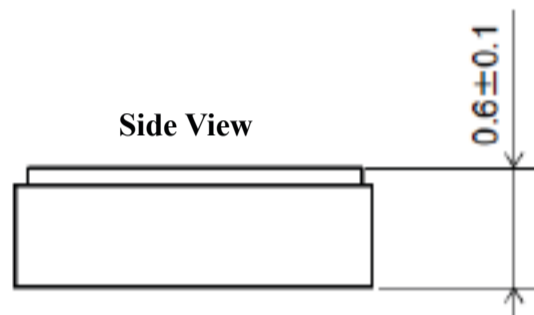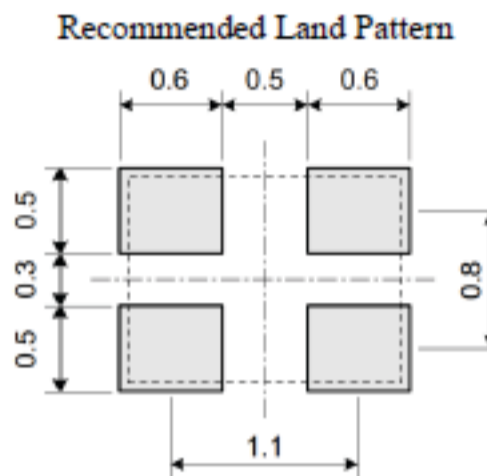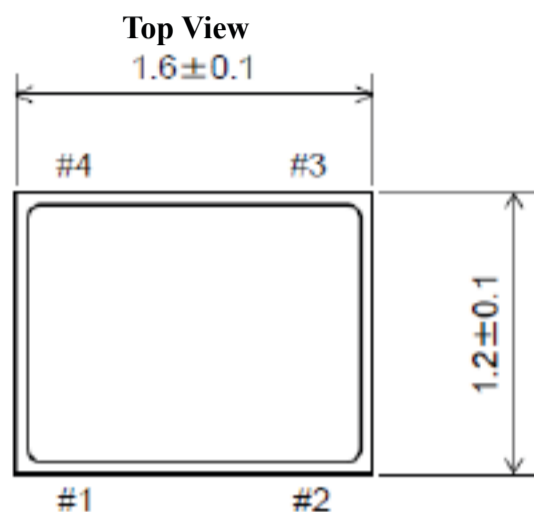

Dimensions: mm

PIN #	Function
1	Enable/Disable
2	GND
3	Output
4	V <sub>dd</sub>

Note: Recommend using a 0.01µF bypass capacitor between PIN 2 and 4.



ASAKMP




ESD Sensitive



1.6 x 1.2 x 0.6mm  
RoHS/RoHS II Compliant  
MSL - N/A

## Reflow Profile

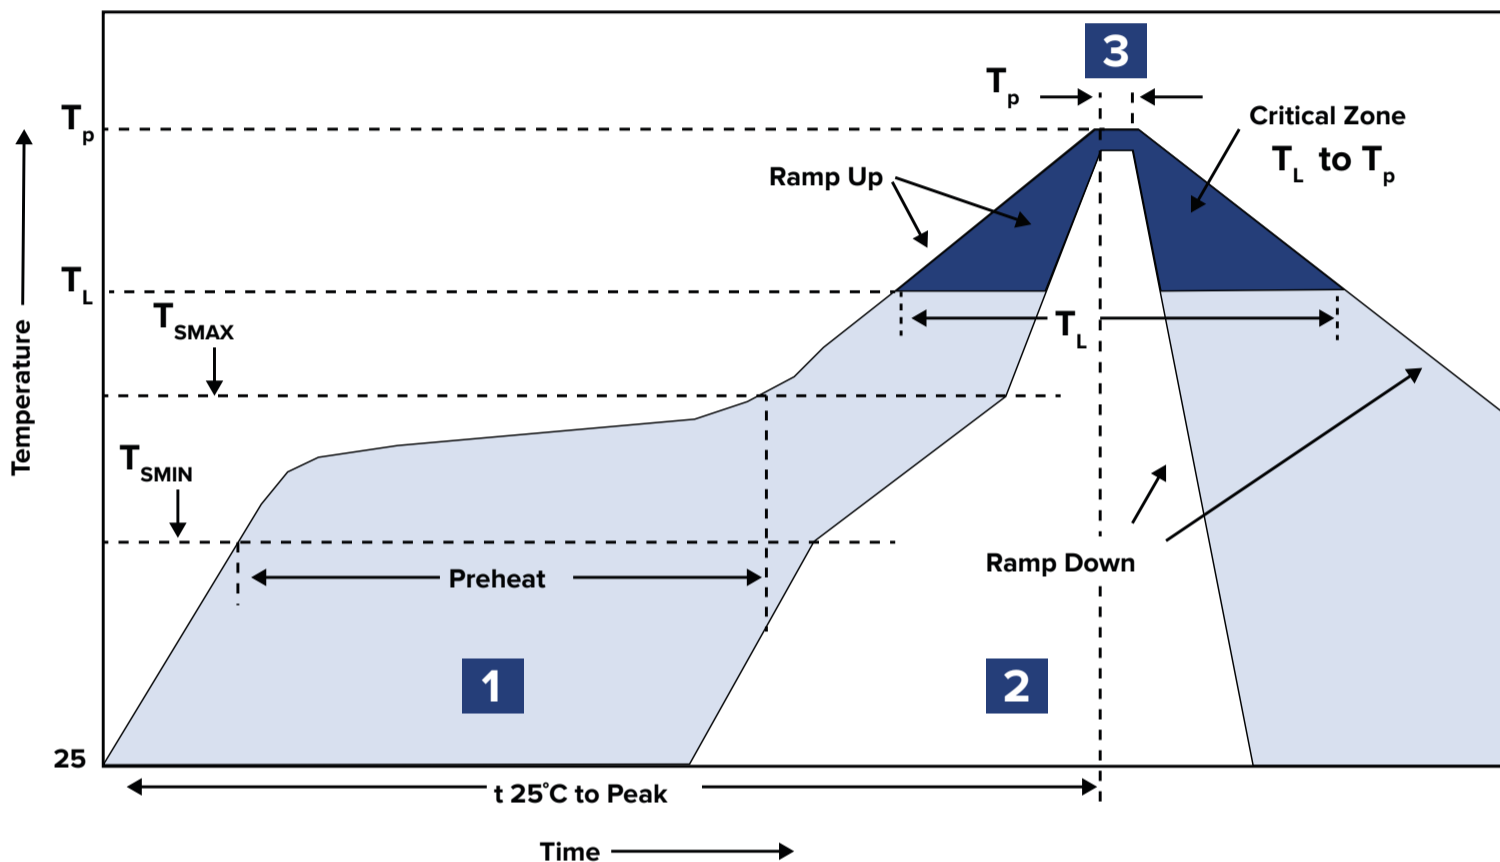

Zone	Description	Temperature	Time
1	Preheat / Soak	$T_{SMIN}$ to $T_{SMAX}$ 150°C to 170°C	80 to 100 sec.
2	Reflow	$T_L$ 220°C	50 to 70 sec.
3	Peak heat	$T_P$ 260°C±5°C	5 sec. Maximum

# Ultra Miniature 1.6 x 1.2mm 32.768 kHz Crystal Oscillator



ASAKMP




ESD Sensitive



1.6 x 1.2 x 0.6mm  
RoHS/RoHS II Compliant  
MSL - N/A

## Packaging

T3= Tape and reel (3,000pcs/reel)

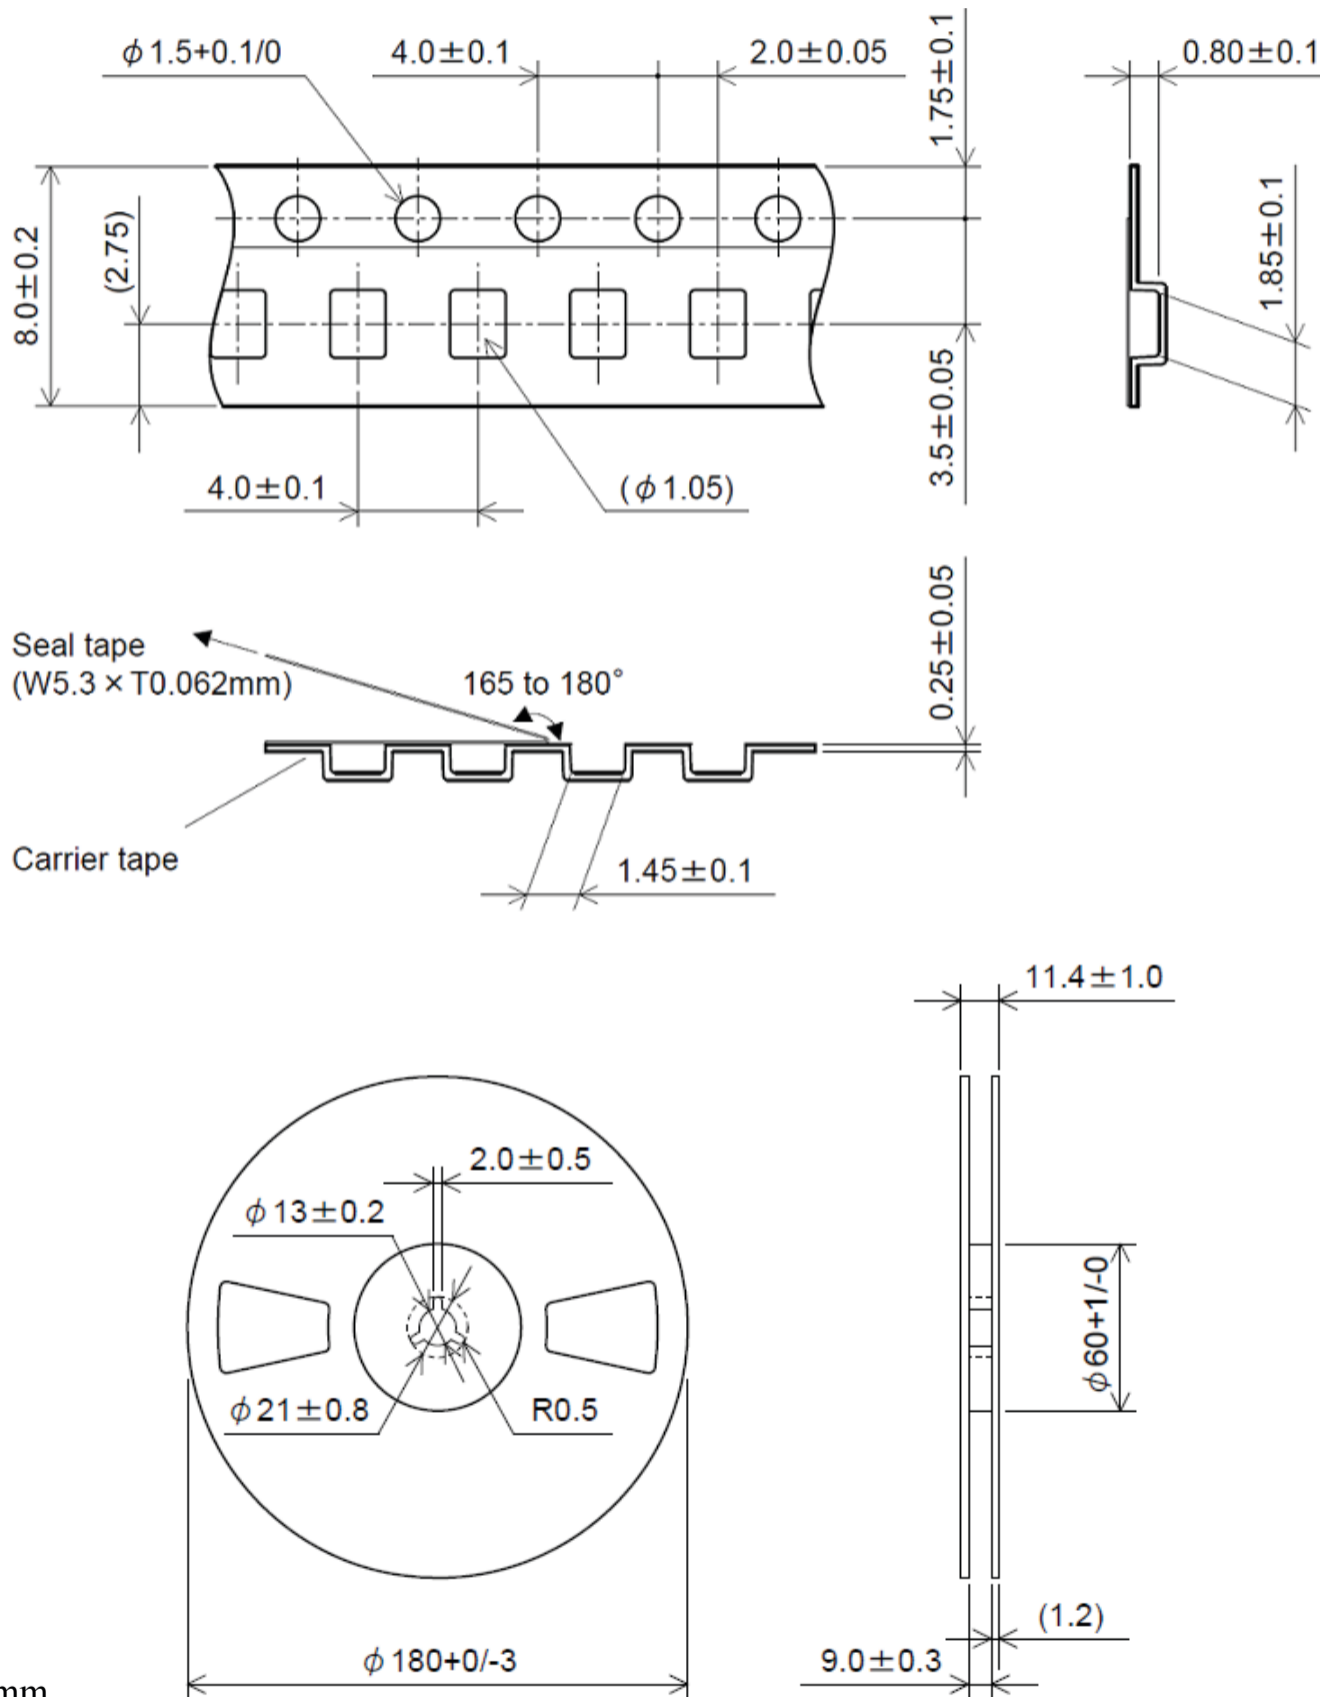

Dimensions: mm



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 08.16.2018

ABRACON IS  
ISO9001-2015  
CERTIFIED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [Abracon](#) manufacturer:*

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)  
[SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.000000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.000000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-283N25E200.000000](#) [9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#)