

3.2 x 2.5 x 1.2 mm 32.768kHz CERAMIC SURFACE MOUNT CRYSTAL OSCILLATOR

ASEK Series



RoHS
Compliant



3.2 x 2.5 x 1.2 mm

FEATURES:

- 32.768kHz in 3.2 x 2.5 package
- Seam sealed assure high reliability performance
- Low current consumption
- IR-Reflow capable
- Extend temperature range available

APPLICATIONS:

- Laptop
- Digital camera
- Wireless LAN
- Bluetooth and mobile communication
- LCD
- PDA and MP3 player
- Electricity, gas and water metering

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ASEK Series
Frequency	32.768kHz
Operating Temperature	0°C to + 70°C (see options)
Storage Temperature	- 55°C to + 125°C
Overall frequency stability:	±100 ppm max. (see options)
Supply voltage (Vdd):	3.3 Vdc ± 10% (see options)
Supply current:	0.8mA typical, 1.5mA max.(Vdd= 1.8V±5%) 1.2mA typical, 2.5mA max.(Vdd= 2.5V±5%) 1.7mA typical, 3.5mA max.(Vdd= 3.3V±10%)
Symmetry:	40/60 % max.@ 1/2Vdd (see options)
Rise and fall time (Tr/Tf):	40ns typical, 50 ns max
Output load:	15pF
Output voltage:	VOH = 0.9 * Vdd min. VOL = 0.1 * Vdd max
Start-up time:	24ms typical, 28ms max
Tri-state function :	Logic "1" or open: Oscillation Logic "0" (VIL < 0.8 Vdc) : Hi z
Aging at 25°C :	± 3ppm/year

OPTIONS AND PART IDENTIFICATION (Left blank if standard)

ASEK-□ - 32.768kHz - □ - □ - □ - □

Supply Voltage	
Blank	3.3V±10%
1	2.5V±5%
2	1.8V±5%

Operating Temp.	
E	-20°C to +70°C
F	-30°C to +70°C
N	-30°C to +85°C
L	-40°C to +85°C


*Contact ABRACON for extended temperature range.

Freq. Stability	
J	±20ppm(*)
R	±25ppm
K	±30ppm
C	±50ppm

* For E, F, N and 0° C to + 70° C only

Packaging	
T	Tape and Reel

Symmetry	
S	45/55% max at 1/2Vdd



3.2 x 2.5 x 1.2 mm 32.768kHz CERAMIC SURFACE MOUNT CRYSTAL OSCILLATOR

ASEK Series




RoHS
Compliant




3.2 x 2.5 x 1.2 mm

OUTLINE DRAWING:

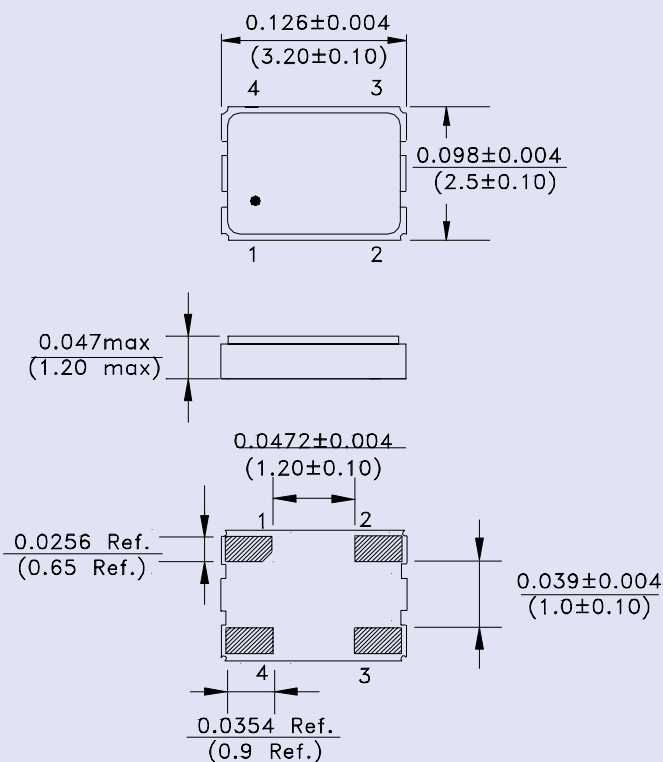

Recommended Land Pattern

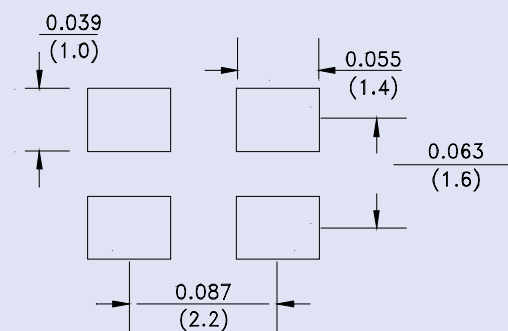


PIN	FUNCTION
1	Tri-state
2	GND
3	Output
4	Vdd

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.


Dimensions: inches (mm)

TAPE & REEL: (1,000pcs/reel)

REFLOW PROFILE

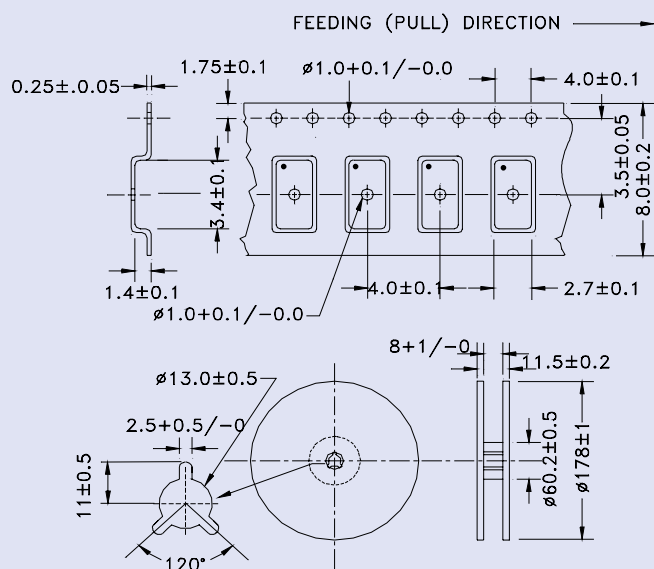

Dimensions: mm

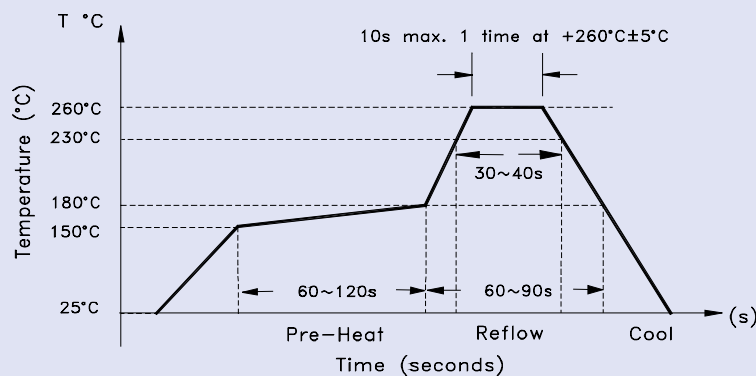

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)
[SiT8209AI-32-33E-125.000000](#) [SiT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SiT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SiT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SiT1602BC-83-33E-10.000000Y](#)