

# 3.3V HCMOS/ TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR



5.0 x 3.2 x 1.3mm

**ASFL1**



## FEATURES:

- Tri state function
- Suitable for high density SMT
- Available tight stability option +/-20ppm
- Seam sealed package assures high reliability performance
- Suitable for RoHS compliant reflow process

## APPLICATIONS:

- CCD clock for VTR camera
- Equipment connected to PC or PC cards
- Thin equipment
- Wireless communication
- PDA, Laptop computer

## STANDARD SPECIFICATIONS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.321	-----	133.33	MHz	
Operating Temperature		-10	-----	+70	°C	See options
Storage Temperature		-55	-----	+125	°C	
Overall Frequency Stability		-100	-----	+100	ppm	See options
Supply Voltage (Vdd)		2.97	3.3	3.63	V	
Input Current	0.321MHz ~ 29.9MHz	-----	8	15	mA	
	30MHz ~ 79.9MHz	-----	20	45		
	80MHz ~ 133.33MHz	-----	28	85		
Symmetry (@ 1/2Vdd)		40	50	60	%	See options
Rise and Fall Time (Tr/Tf)	0.321MHz ~ 29.9MHz	-----	5	10	ns	
	30MHz ~ 79.9MHz	-----	5	7		
	80MHz ~ 133.33MHz	-----	3	7		
Output Load		-----	-----	15	pF	
		-----	-----	5	TTL	
Output Voltage	VOH	0.9*Vdd	-----	-----	V	
	VOL	-----	-----	0.1*Vdd	V	
Tri-state Function	VIH	0.7*Vdd	-----	-----	V	"1" or Open: Oscillation
	VIL	-----	-----	0.3*Vdd	V	"0": Output disable (Hi Z)
Disable Current				10	µA	
Start-up Time	0.321MHz ~ 29.9MHz	-----	1	10	ms	
	30MHz ~ 79.9MHz	-----	3	10		
	80MHz ~ 133.33MHz	-----	3	10		
Phase Jitter RMS (12kHz to 20MHz)		-----	-----	1	ps	Reference only. Please contact Abracon for specific frequencies
Aging		-5.0	-----	+5.0	ppm	@+25°C First year

## OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ASFL1-  MHz -  -

Frequency in MHz
e.g. 24.576MHz
14.31818MHz
26.000MHz

Operating Temp.
I: 0°C ~ +50°C
D: -10°C ~ +60°C
E: -20°C ~ +70°C
F: -30°C ~ +70°C
N: -30°C ~ +85°C
L: -40°C ~ +85°C

Freq. Stability
J: ± 20 ppm(*)
R: ± 25 ppm
K: ± 30 ppm
H: ± 35 ppm
B: ± 40ppm
C: ± 50 ppm

Symmetry
Blank: 40/60% @1/2Vdd
S: 45/55% @1/2Vdd

(\*) Temp option I, D, E and -10°C ~ +70°C only.

Packaging
Blank: Bulk
T: 1000pcs/reel
T2: 250pcs/reel

ABRACON IS  
ISO9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 04.13.11**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

# 3.3V HCMOS /TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR





5.0 x 3.2 x 1.3mm

ASFL1



## OUTLINE DRAWING:

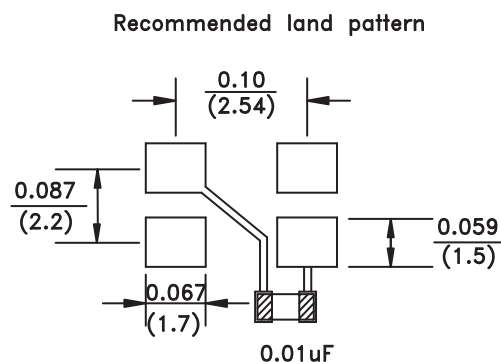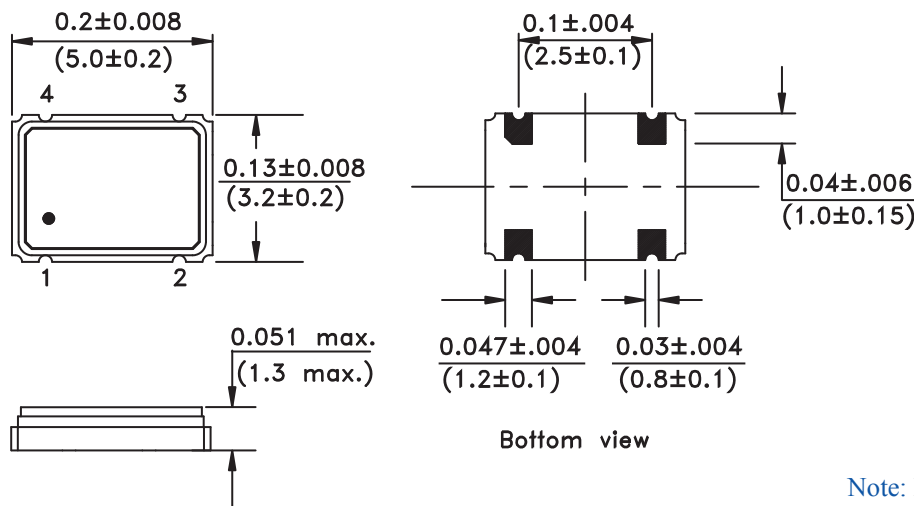


Pin	Function
1	Tri-State
2	GND
3	Output
4	Vdd

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.


Dimensions: inches (mm)

## TAPE & REEL:

T= Tape and reel (1,000pcs/reel) Dimensions: mm  
T2= Tape and reel (250pcs/reel)

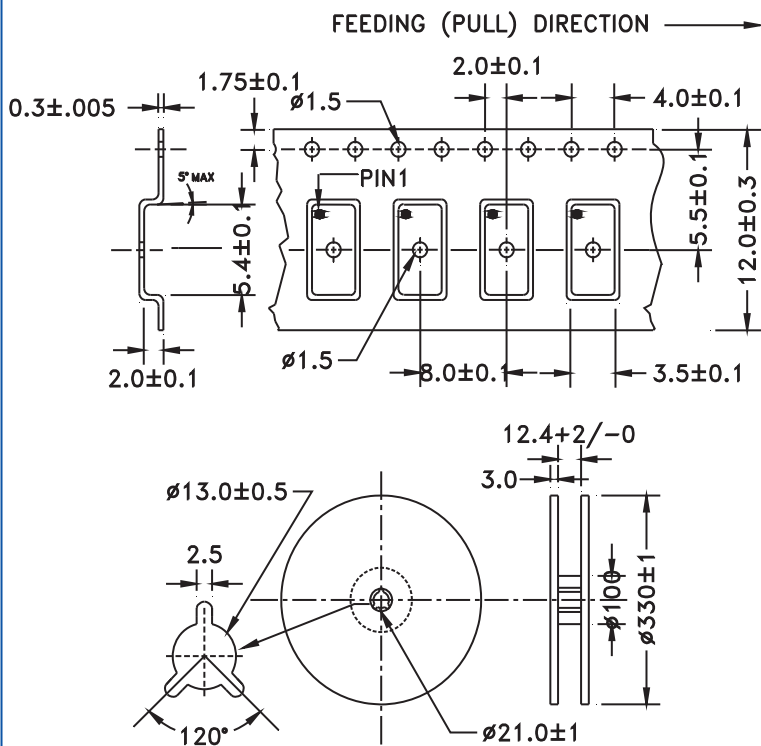

## REFLOW PROFILE:

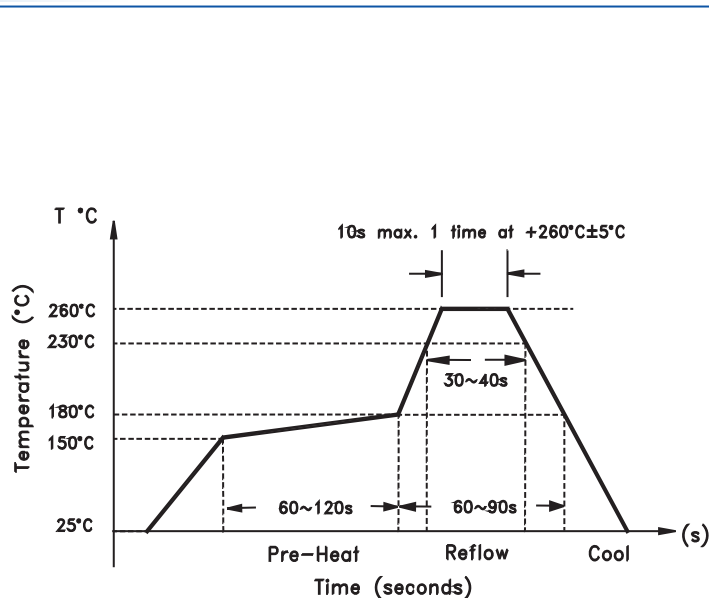

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 04.13.11**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [ABRACON](#) manufacturer:*

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XLH735025.000JU4I8](#)