
#### **1.8V CMOS COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR** ASFL3 ASFL3 RoHS Pb 5.0 x 3.2 x 1.6 mm Compliant **FEATURES**: > APPLICATIONS: Tri-state function · Seam sealed package CCD clock for VTR camera Thin equipment assures high reliability Suitable for high density SMT · Wireless communication · Equipment connected to Suitable for RoHS reflow · Available tight stability PC or PC cards option, +/-20ppm **STANDARD SPECIFICATIONS:** PARAMETERS

ABRACON P/N:	ASFL3 Series				
Frequency:	0.5 MHz to 125 MHz				
Operating temperature:	-10°C to +70°C (see option)				
Storage temperature:	- 55°C to + 125°C				
Overall Frequency Stability:	±100 ppm max. (see option)				
Supply voltage (Vdd):	1.8 Vdc ± 10%				
Supply Current (Idd):	See table below				
Symmetry at 1/2 Vdd:	40/60% max. (see option)				
Rise and Fall Times(Tr/Tf):	See table below				
Output load:	15pF max.*				
Output Voltage:	VOH = 0.9*Vdd min., VOL = 0.1*Vdd max.				
Tri-state Function:	"1" or open;: Oscillation; VIH > 0.7*Vdd, "0": Output disabled (HI-Z); VIL < 0.3*Vdd				
Start-up-time:	See table below				
Aging (First year):	±3 ppm max. @25°C				
Period Jitter:	See table below				

#### Table:

\* 30pF max is available.Please contact ABRACON.

Frequency range	ldd mA	ldd mA	Tr/Tf ns	Tr/Tf ns	Start-up time ms	Start-up time ms	Period Jitter RMS	Period Jitter RMS
(MHz)	(Тур)	(Max)	(Тур)	(max)	(Тур)	(Max)	ps (Typ)	ps (Max)
0.5~9.999	2	5	5	10	3	5	2	3
10.000~29.999	5	8	3	6	3	5	2	3
30.000~49.999	8	10	3	6	3	5	2	3
50.000~69.999	5	10	2	5	3	5	2	3
70.000~99.999	8	15	2	5	4	10	2	3
100.000~125.000	12	20	2	4	4	10	2	3

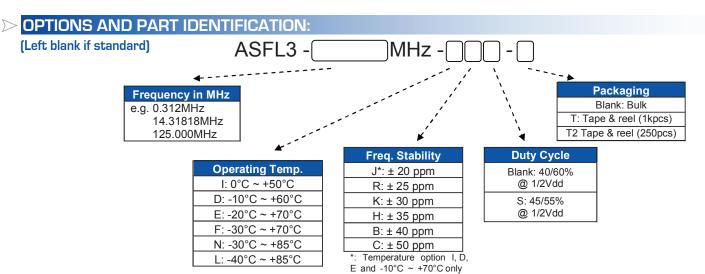

ABKAG







**CRYSTAL CLOCK OSCILLATOR** 



5.0 x 3.2 x 1.6 mm

### **OUTLINE DRAWING:**

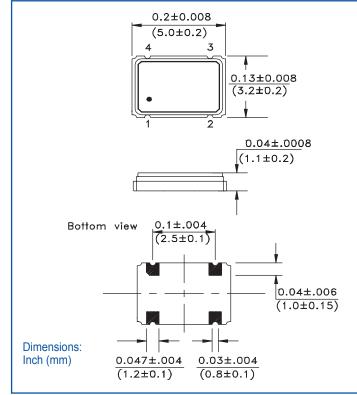

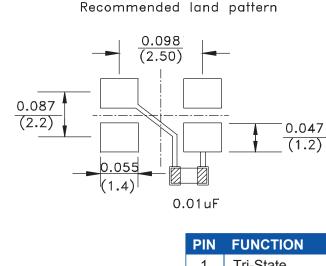

RoHS

Compliant

Pb


**Note**: It is recommended to use an approximately 0.01uF bypass capacitor between PIN 2 and 4.

PIN	FUNCTION
1	Tri-State
2	GND
3	Output
4	VDD

# capacitor between PIN 2 and

## TAPE & REEL: Tape and reel 1,000pcs/reel

#### REFLOW PROFILE:

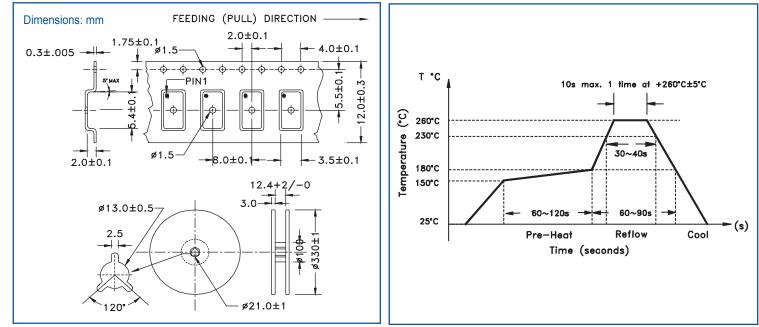

Need a test socket for the ASFL3 Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, **click here.** 

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Visit www.abracon.com for Terms & Conditions of Sale **Revised: 06.30.10** 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

## ASFL3

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard Clock Oscillators category:

Click to view products by ABRACON manufacturer:

Other Similar products are found below :

EP1400SJTSC-125.000M 601137 601252 CSX750FBC-24.000M-UT CSX750FBC-33.333M-UT CSX750FCC-3.6864M-UT F335-12 F335-25 F535L-50 DSC506-03FM2 ASA-20.000MHZ-L-T ASA-25.000MHZ-L-T ASA-27.000MHZ-L-T ASV-20.000MHZ-LR-T ECS-2018-160-BN-TR EL13C7-H2F-125.00M MXO45HS-2C-66.6666MHZ NBXDBB017LN1TAG NBXHBA019LN1TAG SiT1602BI-22-33E-50.000000E SIT8003AC-11-33S-2.04800X SiT8256AC-23-33E-156.250000X SIT8918AA-11-33S-50.000000G SM4420TEV-40.0M-T1K SMA4306-TL-H F335-24 F335-40 F335-50 F535L-10 F535L-12 F535L-16 F535L-24 F535L-27 F535L-48 PE7744DW-100.0M CSX750FBC-20.000M-UT CSX-750FBC33333000T CSX750FBC-4.000M-UT CSX750FBC-7.3728M-UT CSX750FBC-8.000M-UT CSX-750FCC14745600T CSX750FCC-16.000M-UT CSX-750FCC40000000T CSX750FCC-4.000M-UT ASA-22.000MHZ-L-T ASA-26.000MHZ-L-T ASA-40.000MHZ-L-T ASA-48.000MHZ-L-T ASA-60.000MHZ-L-T ASF1-3.686MHZ-N-K-S