

ECN/PCN No.: 3807

For Manufacturer			
Product Description: Tight Stability SMD Clock Oscillator	Abracon Part Number / Part Series: ASFLT Series	<input type="checkbox"/> Documentation only <input type="checkbox"/> ECN <input checked="" type="checkbox"/> EOL	<input checked="" type="checkbox"/> Series <input type="checkbox"/> Part Number
Affected Revision: K	New Revision: EOL	Application:	<input type="checkbox"/> Safety <input checked="" type="checkbox"/> Non-Safety
Prior to Change: ACTIVE https://abracon.com/Oscillators/ASFLT.pdf			
After Change: EOL			
Cause/Reason for Change: Production will be discontinued due to material constraint issues.			
Change Plan			
Effective Date: 4/27/21	Additional Remarks:		
Change Declaration:			
Issued Date: 4/27/21	Issued By: Stephanie Lopez	Issued Department: Engineering	
Approval: Thomas Culhane Engineering Director	Approval: Reuben Quintanilla Quality Director	Approval: Ying Huang Purchasing Director	
For Abracon EOL only			
Last Time Buy (if applicable): None	Alternate Part Number / Part Series: None		
Additional Approval:	Additional Approval:	Additional Approval:	
Customer Approval (If Applicable)			
Qualification Status: <input type="checkbox"/> Approved <input type="checkbox"/> Not accepted <i>Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.</i>			
Customer Part Number:		Customer Project:	
Company Name:	Company Representative:	Representative Signature:	
Customer Remarks:			

TIGHT STABILITY INDUSTRIAL GRADE CRYSTAL OSCILLATOR



5.0 x 3.2 x 1.05mm

ASFLT SERIES



ESD Sensitive



RoHS/RoHS II Compliant

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

FEATURES:

- Highly reliable seam-sealed package
- Low current consumption
- Low phase noise and jitter
- Industrial grade tight temperature stability ($\pm 5.0\text{ppm} / -40$ to $+85^\circ\text{C}$)
- Fast start-up time
- CMOS output with Tri-state function

APPLICATIONS:

- Home networking by AC socket
- Wireless LAN
- Mobile communications
- PLC modem
- WiMax

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	4		54	MHz	
Standard Frequencies	5, 10, 12, 16, 16.384, 19.44, 20, 24, 26, 32, 40, 44			MHz	
Operating Temperature	-40		+85	$^\circ\text{C}$	
Storage Temperature	-40		+85	$^\circ\text{C}$	
Overall Frequency Stability*	-15		+15	ppm	See options
Supply Voltage (Vdd)	+2.7	3.0	+3.3	V	See options
Supply Current (Idd)			7.0	mA	
Stand-by Current			10	μA	
Symmetry	45		55	%	@ 1/2Vdd
Rise and Fall Time (Tr/Tf)			5.0	ns	10%Vdd-90%Vdd
Output Load			15	pF	CMOS
Output Voltage (VOH)	0.9* Vdd			V	
Output Voltage (VOL)			0.1* Vdd		
Start-up Time		0.2	3.0	ms	
RMS Jitter		3.0		ps	
Tri-state function (Stand-by)	Pin #1: "1" (VIH \geq 0.7*Vdd) or Open: Oscillation Pin #1: "0" (VIL $<$ 0.3*Vdd): (Hi-Z)				
Phase Noise		-143		dBc/Hz	@10kHz offset
Aging@+25 $^\circ\text{C}$	-2		+2	ppm	First year
	-7		+7		10 years

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ASFLT - - MHz - -

Supply Voltage
Blank: 3.0 \pm 10%
A: 2.7 \pm 10%
B: 3.3 \pm 10%
C: 2.8 \pm 10%
D: 2.5 \pm 10%

Frequency in MHz
Please specify the frequency in MHz. e.g. 16.384MHz

Overall Freq. Stability
Blank: $\pm 15\text{ppm}$
Y: $\pm 10\text{ppm}$
R7*: $\pm 7\text{ppm}$
R5*: $\pm 5\text{ppm}$

Packaging
Blank: Bulk
T: Tape & Reel

*Contact Abracon for availability



TIGHT STABILITY INDUSTRIAL GRADE CRYSTAL OSCILLATOR

ASFLT SERIES



ESD Sensitive




RoHS/RoHS II Compliant





5.0 x 3.2 x 1.05mm

OUTLINE DRAWING:

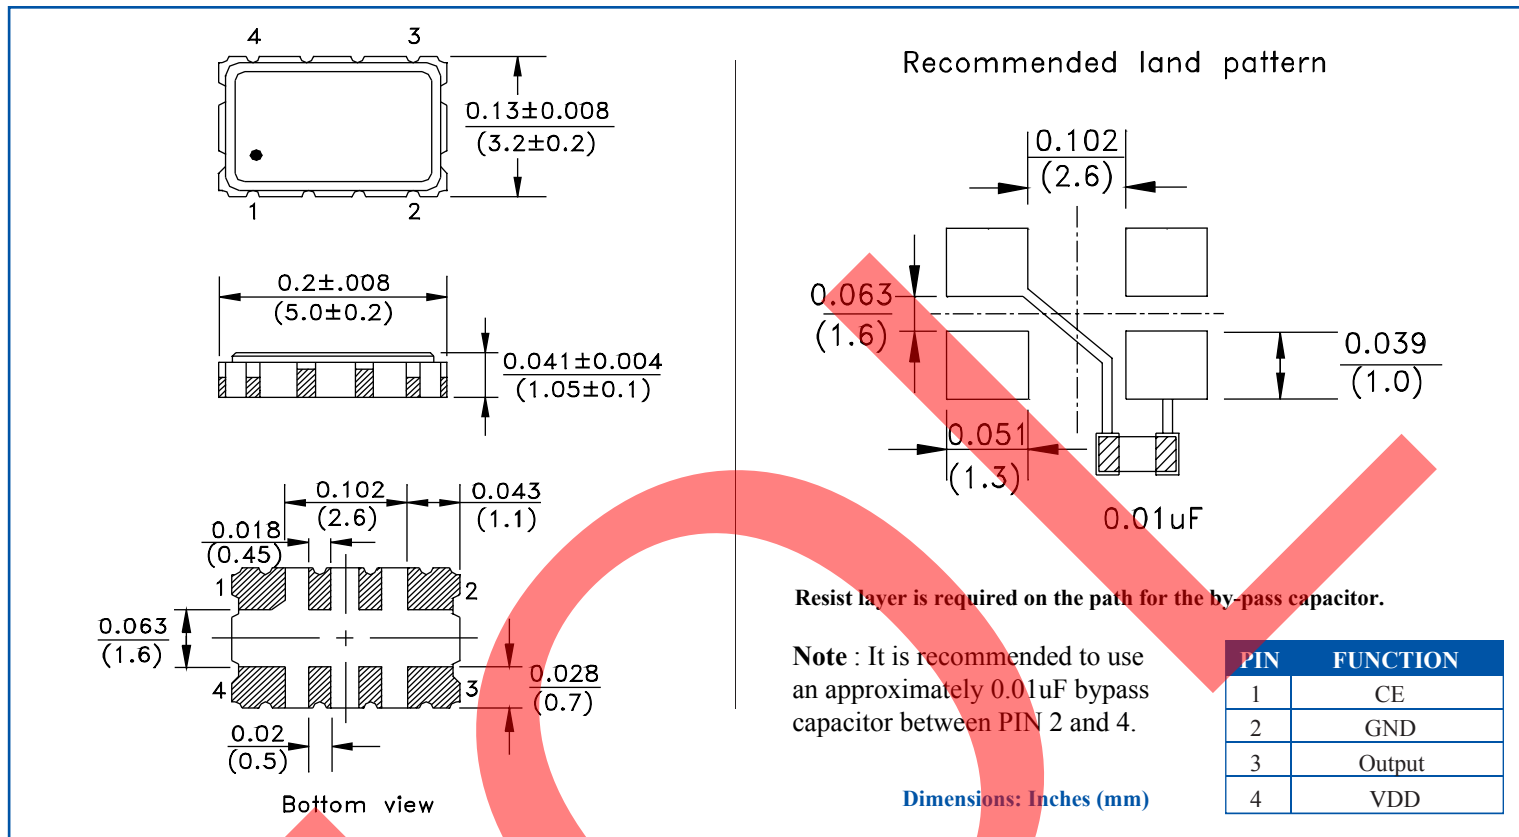


TAPE & REEL: (1,000 pcs/reel)

REFLOW PROFILE:

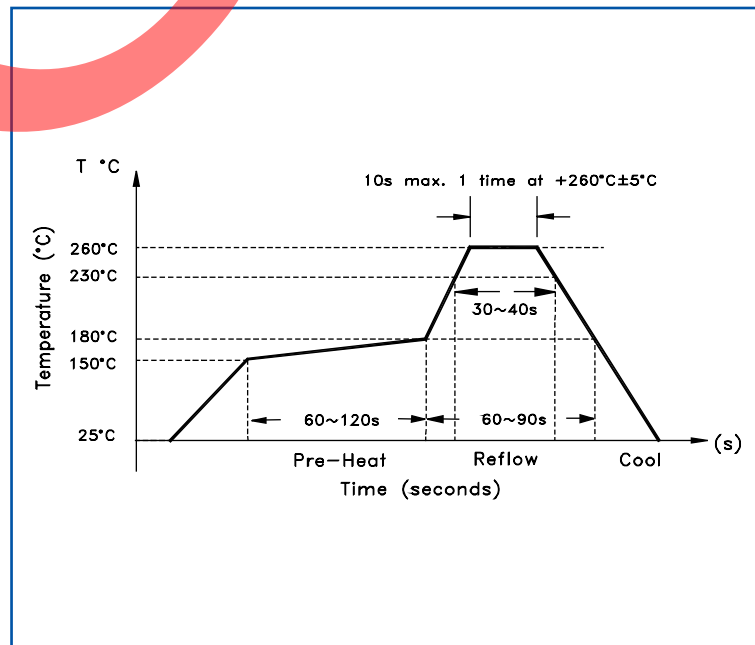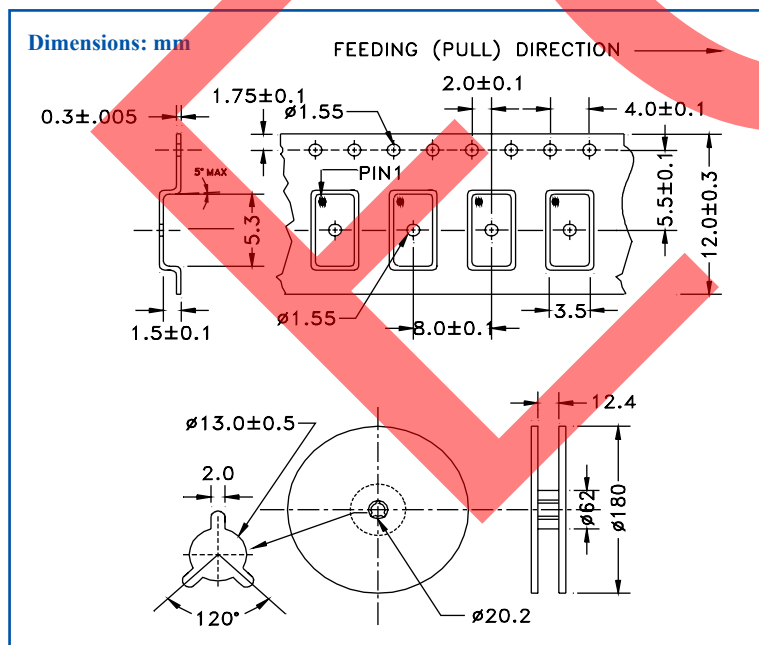

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 06.18.14**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 fax 949-546-8001 www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)
[SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-](#)
[16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-](#)
[2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-](#)
[243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-](#)
[4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-](#)
[233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#)
[9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#)