

# 5.0V HCMOS/TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR



7.0 x 5.08 x 1.8 mm

ASL Series



## FEATURES:

- HCMOS and TTL compatible.
- Available optional -40°C to 85°C extended temperature.
- Tri-state Enable/Disable function.
- IR reflow capable
- Seam sealed.

## APPLICATIONS:

- Provide clock signals for microprocessors, PC mainboards, Graphic cards.
- High output drive capability applications.
- Personal computer, Laptop computer

## STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N:	ASL Series
Frequency range:	1.000 ~ 125.000 MHz
Operating temperature:	-10° C to + 70° C (See Options)
Storage temperature:	- 55° C to + 125° C
Overall frequency stability:	± 100 ppm max. (see options)
Supply voltage (Vdd):	5.0 V ± 10%
Input current:	See Table 1
Symmetry at 1/2Vdd:	40/60 % max. (see options)
Rise and fall time (Tr/Tf):	See Table 1
Output load:	10TTL or 50 pF (1MHz to 70MHz) 10TTL or 15 pF (70.001MHz to 125MHz)
Output voltage:	VOH = 0.9 * Vdd min. VOL = 0.4 * Vdc max.
Start-up time:	10 ms max.
Tri-state function :	"1" (VIH ≥ 0.7*Vdd) or open: Oscillation "0" (VIL < 0.3*Vdd) : Hi Z
Aging at 25°C/year:	±5ppm max.
RMS jitter:	± 25ps max.
Peak to Peak jitter:	± 100ps max.
Power down current (B option):	10µA max.


Table 1

Freq. (MHz)	Idd max. (mA)	Tr/Tf max. (nSec)	Freq. (MHz)	Idd max. (mA)	Tr/Tf max. (nSec)
1.0 ~ 34.99	25	10	60.01~100.0	60	5
35.0 ~ 60.0	40	5	100.01 ~ 125	80	2.5

## OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ASL - Frequency - □ - □ - □ - □ - □ - □

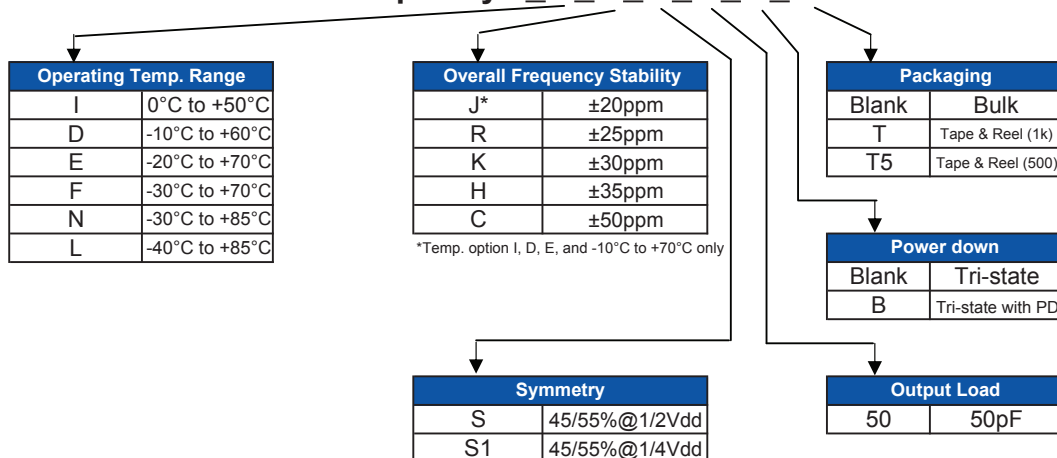

# 5.0V HCMOS/TTL COMPATIBLE SMD CRYSTAL CLOCK OSCILLATOR



ASL


7.0 x 5.08 x 1.8 mm




RoHS  
Compliant

ASL Series

## OUTLINE DRAWING:

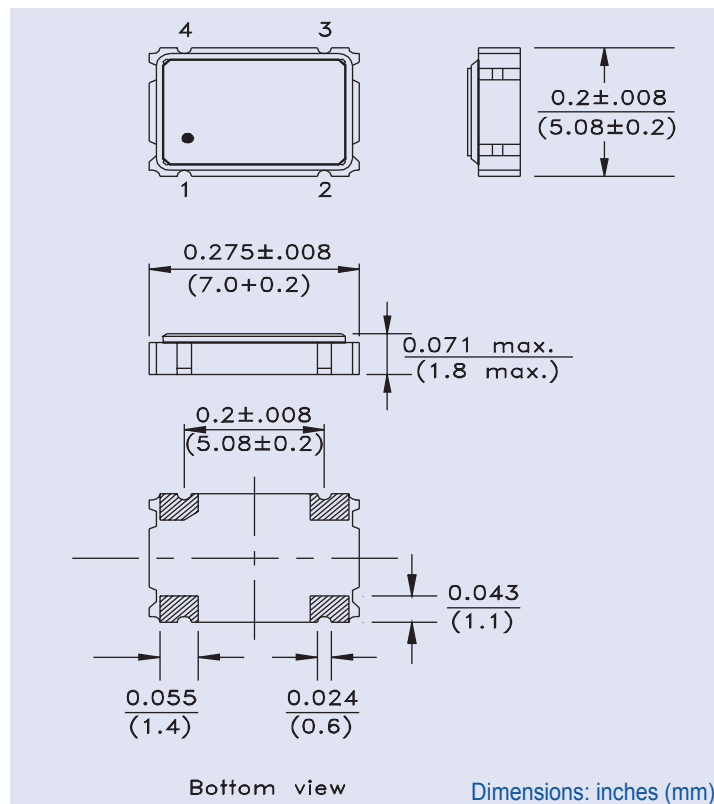


## Recommended land pattern

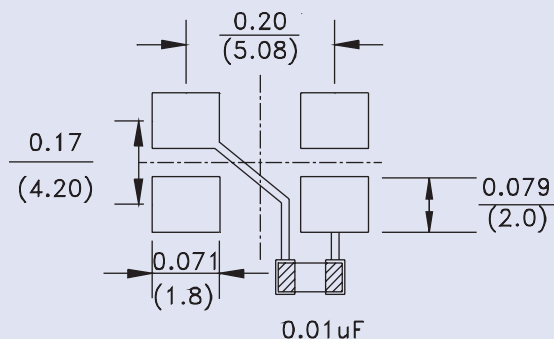


PIN	FUNCTION
1	Tri-state Enable/Disable
2	GND/Case
3	Output
4	Vdd

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

## TAPE & REEL:

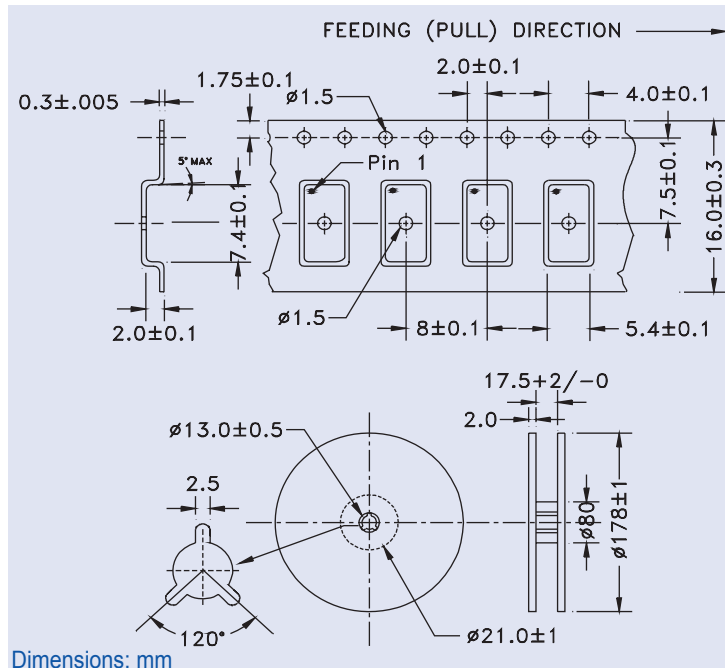

## REFLOW PROFILE:

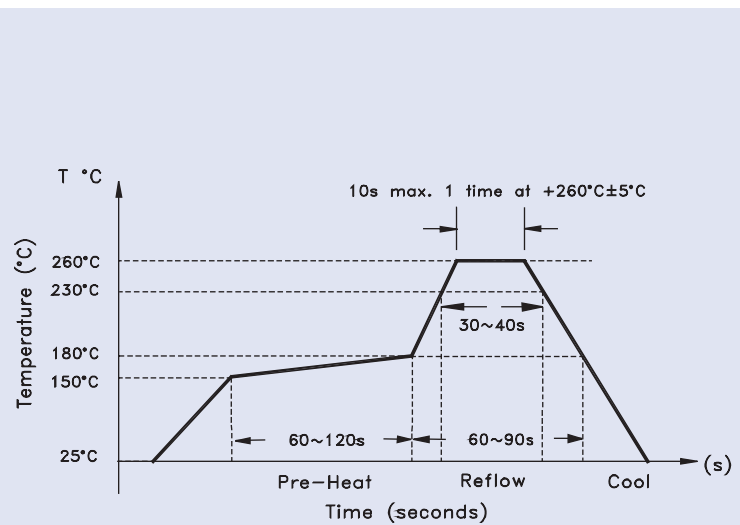

Need a test socket for the ASL Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, click here. **P/N: AXS-7050-04-01**

**NOTE:** Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.

ABRACON IS  
ISO 9001 / QS 9000  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 08.31.09**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Abracon](#) manufacturer:*

Other Similar products are found below :

[AISC-1812H-470K-T](#) [ASGTX-BLANK](#) [ABLJO-V-155.520MHZ](#) [ABLNO-122.880MHZ](#) [ABLNO-V-96.000MHZ](#) [ABLS-10.240MHZ-B4-T](#)  
[ABM3B-26.000MHZ-10-D-1-G-T](#) [AOCJY3-40.000MHZ-E](#) [ARRSN5-868.000MHZ](#) [ASEMB-80.000MHZ-XY-T](#) [ASGTX-P-1.000GHz-1](#)  
[AST3TQ-T-24.576MHz-50-C](#) [ASTMLPD-24.000MHz-LJ-E-T](#) [ABLJO-V-150.000MHz](#) [ABM2-16.000MHZ-D4Y-T](#) [ABM8G-12.000MHZ-](#)  
[B4Y-T3](#) [AIRD-06-101K](#) [AOCJY6-10.000MHz-1](#) [ASFLMB-48.000MHZ-LY-T](#) [ASG-C-V-A-50.000MHz](#) [ASHEK2-32.768KHZ-LT](#) [AXS-](#)  
[5032-04-12](#) [ABM8X-101-24.000MHz-T](#) [AIML-0805-470K-T](#) [AOCJY3A-10.000MHZ-E](#) [ASFL1-50.000MHZ-EK-T](#) [AOCTQ5-X-](#)  
[10.000MHz-M10-SW](#) [ASPI-0705-820K-T](#) [AMPMAFB-19.2000T](#) [ABL-10.000MHZ-D-T](#) [ABM3B-27.120MHZ-10-D2H-T](#) [AOC2012XAJC-](#)  
[12.8000C](#) [EP1400SJETTSC-11.0592M](#) [EP1400SJETTSC-2.000M](#) [EHH1100TS-13.560M](#) [ABL-16.384MHZ-B2](#) [AIRD-01-680K](#) [AOCJY-](#)  
[10.000MHz](#) [AOCJY2-10.000MHz](#) [AOCJY-38.880MHZ-F](#) [AOCJY3A-100.000MHz-E](#) [ASG2-D-X-A-1000.000MHz](#) [ASG-D-X-A-](#)  
[200.000MHz](#) [ASGTX-P-1.500GHz-1](#) [AXS-3225-04-04](#) [AXS-3225-04-10](#) [AXS-5032-04-02](#) [AXS-7550-06-05](#) [ABLJO-92.160MHZ](#) [ABLS-](#)  
[6.7458MHZ-20-R60-D-T](#)